



Micro HDMI/HDMI 2.0 AOC CABLE

TABLE OF CONTENTS

CHAPTER	PAGE
Introduction	3
Intended Use	3
Safety Instructions	4-5
Delivery content	5
Features	6
Application	7
Specifications	7-9
Mechanical properties and Environmental performance	7
Specifications	8
Environmental Conditions	9
Cross Section	9
Construction	9
Cable Construction	9
Operation and connection diagram	10-11
Troubleshooting	12
Maintenance	12
Cleaning	13
Warranty and Liability	13-14
CE Conformity	14
Disposal of the Device	14
Disclaimer	15

INTRODUCTION

Thank you for purchasing the Micro HDMI/HDMI 2.0 AOC Cable with detachable connectors.

This Cable allows you to transmit HDMI signals to a distance of up to 100m without external power supply. This cable is a hybrid cable containing both fiber optic and copper cores.

Our HDMI Active Hybrid Cable is the most competitive long distance HDMI interconnection solution on the market. It supports a maximum data rate of 6Gbps per channel, with total 18Gbps, it is light weight, flexible, and has an ultra-small installation bending radius of 20mm and fixed bending radius of 45mm.

With our advanced optical engine embedded the HDMI Hybrid Cable provides full HDMI signal integrity.

INTENDED USE

This product is intended for indoor use only. Do not use it outdoors. Contact with moisture, e.g. in bathrooms, must be avoided under all circumstances.

For safety and approval purposes (CE), you must not rebuild and/or modify this product. If you use the product for purposes other than those described above, the product may be damaged. In addition, improper use can cause hazards such as short circuiting, fire, electric shock etc.

Read the instructions carefully and keep them. Make this product available to third parties only together with its operating instructions.

SAFETY INSTRUCTIONS

Read the operating instructions carefully and especially observe the safety information. If you do not follow the safety instructions and information on proper handling in this manual, we assume no liability for any resulting personal injury or damage to property. Such cases will invalidate the warranty/ guarantee.

The device is not a toy. Keep it out of the reach of children and pets.

The maximum pulling tensile load of the cable is 150N (15kg). Never pull the cable with higher load. The minimum bending radius of the hybrid cable is approximately 20mm, bending the cable to a smaller radius will irreversibly destroy the cable.

Pay attention to trip hazards; make sure that the cable is installed safely.

Do not leave packaging material lying around carelessly. These may become dangerous playing material for children.

Protect the product from extreme temperatures, direct sunlight, strong jolts, high humidity, moisture, flammable gases, vapors and solvents.

Do not place the product under any mechanical stress. If it is no longer possible to operate the product safely, take it out of operation and protect it from any accidental use.

Safe operation can no longer be guaranteed if the product:

- is visibly damaged
- is no longer working properly
- has been stored for an extended period in poor ambient conditions or
- has been subjected to any serious transport-related stresses.

Please handle the product carefully. Jolts, impacts or a fall even from a low height can damage the product.

Also observe the safety and operating instructions of any other devices which are connected to the product.

Consult an expert when in doubt about the operation, safety or connection of the device.

DELIVERY CONTENT

- 1x Micro HDMI/HDMI 2.0 AOC Cable
- 2x Housing protective cap
- 1x USB-A to Micro USB cable
- 1x User Manual DE/EN
- 1x AOC Warning Card

FEATURES

This HDMI 2.0 AOC Cable has many features that enable it to perform in a superior manner. Among those features you will find:

- Detachable HDMI A connector which leads to a much smaller HDMI D connector
- Ideal solution for applications where space is very limited, such as pulling through tight cable ducts, empty conduits, walls, etc.
- Supports HDMI 2.0b specification with data rates up to 18Gbps
- Supports HDCP1.4 & HDCP2.2
- Supports resolutions up to Ultra HD 4K (3840x2160) 60Hz, 4:4:4
- Supports computer resolutions including 1080P and 4K2K (60Hz)
- Supports 48 bit color depth (16bit per channel)
- Supports lossless HDMI audio formats like Dolby True HD and DTS-HD, etc.
- Supports ARC, HEC and CEC
- Supports EDID incl. self-detecting function
- Long-term bending radius (20mm)
- Plug and Play
- Low Power Consumption: 250mW (max) (Power Required)
- No loss of signal
- Delivering crystal clear digital images instantly

APPLICATION

This product is for example applicable to:

- Digital Signage
 - LED Signboards
 - Home Theater
 - Blu-ray, 3D Video, Projector, Set-top box, DVR, Game Consoles and Computer
 - TV Broadcast Station
 - Conference Room
 - Video Equipment
 - Security Systems
- ... and more

SPECIFICATIONS

Mechanical properties and Environmental performance:

Item	Units	Specified values
Tensile strength (Long-term)	N	Up to 150
Crush resistance (Long-term)	N/100mm	300
Minimum bending radius (dynamic)	mm	20 D*
Minimum bending radius (static)	mm	10 D*

*D = the diameter of the cable body, in this case it is 4.5mm

Specifications:

Item	Description	
Units	Transmitter (Source)	Receiver (Display)
HDMI Version	HDMI 2.0b, Fully Support bi-directional EDID and HDCP communication HDCP1.4/2.2 pass through ,Audio, CEC, support HEC&ARC	
Video Bandwidth	18Gbps - 6 Gbps pro Kanal + Clock	
Supported Resolution & Distance	Max. resolutions: 2160p60 4:4:4 8/10bit PC: WUXGA 1920x1200 up to 100 meters HDTV: 480p, 720p, 1080i and 1080p deep color, 4K (60P), 3D Full HD 1920x1080 up to 100 meters	
O/E Converter	4 channel 850 nm VCSEL array	4 CH GaAs PD array
Connector Type	Micro HDMI D & HDMI A	
Cable Type	Hybrid type with OM3 fiber and copper wire	
Cable Outer Diameter	4.5 mm	
Jacket Outer Material	PVC	
Differential Input	100 Ohm	
Power Consumption	250 mW (max.)	
Power Supply	Non external power required	
Passive Power Supply	4.75-5.5 V	

Environmental Conditions

Operating Temperature:	-10–50 °C
Storage Temperature:	-20–60 °C
Relative Humidity:	10–80 %RH

CROSS SECTION


Construction:

Hybrid cable, fiber (high speed data) & copper (low speed signals)

Cable construction:

4 fiber cores and 7 copper conductors

Cable jacket:	PVC / TPU,
Diameter:	~ 4.5mm
Connector dimensions:	~ 64 x 20.5 x 10
Connector material:	Zinc Alloy



OPERATION AND CONNECTION DIAGRAM

Attention:

The FX-I352 series is designed for use with the +5V passive power, supplied through pin 18 on the HDMI connection from the source device. This +5V connection, as well as powering the internal fiber optic module, is also carried through to the other sink via a full standard copper connection. Please make sure, that the source device is capable of delivering more than 500mA.

This cable can only be used in one direction. The connectors are marked with "SOURCE" and "DISPLAY". Each connector must be plugged into the correct port to avoid signal loss.


Before using this cable, please make sure that all devices which will be connected with the AOC HDMI Cable are shut down and without power.

Then you can start to connect the "source side" of the HDMI plug to the transmitter and connect the "display side" of the other HDMI plug to the receiver/display.

This works without additional power supply.

We do not recommend using any intermediate cables or adapters between the connections, as the signal transmission performance maybe attenuated.

Switch on the power of the device of the HDMI source and the display.

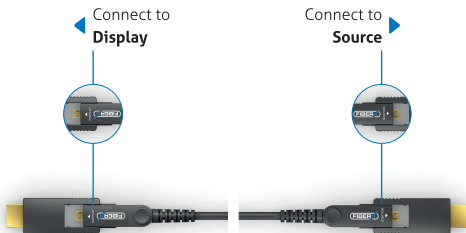

The HDMI-A connector can be removed from either end of the cable by loosening the small screws on the side of the connector and then pulling off the HDMI-A connector, revealing a Micro HDMI connector below. Once removed, the Micro HDMI-D connector, with its narrower housing, can be routed through access holes where space is very limited, for example, pulling through tight cable ducts, empty conduits, and walls, etc. The package also includes a protective housing cap specially designed to protect the smaller housing when routing the cable.

If the system does not work properly, see trouble shooting guide in next section.

TROUBLESHOOTING

The Display shows:

- A black screen
 - Screen is distorted
 - Noise interference
1. Check that the connectors are in the correct ports of the source and sink devices – check the labels on the connector housing to be sure.
 2. Ensure that the HDMI plugs are firmly inserted into the HDMI source and display.
 3. Check if the HDMI source and display are powered on and properly booted.
 4. Reset the system by unplugging and re-plugging the source or display HDMI port.
 5. Re-boot the system with the optical HDMI cable system reconnected.

MAINTENANCE

There are no components located inside the product you need to maintain. Never open/dismantle the product.

Maintenance, modifications and repairs are to be performed exclusively by an expert or at a qualified shop.

If you have questions which remain unanswered by these operating instructions, contact our technical support service or other technical personnel.

CLEANING

Before cleaning the product it must be disconnected from all other connected products.

Do not use abrasive or solvents or any aggressive cleaning agents, rubbing alcohol or other chemical solutions as they can cause damage to the housing and malfunctioning.

To clean the product, a dry, soft and clean cloth is sufficient. Do not apply too much pressure to the housing as this may cause scratch marks. You can easily remove dust using a long-haired, soft and clean brush.

WARRANTY AND LIABILITY

The producer grants 2 years warranty to a new device.

As the manufacturer has no influence on installation, warranty only applies to the product itself.

If any fault or damage is detected on your product, please contact your dealer and provide your sales slip or invoice as evidence of the purchase, if necessary. Your dealer will repair the fault either on site, or send the device to the manufacturer. You make the work of our technicians considerably easier, describing possible faults in detail – only then you can be assured that faults, occurring only rarely, will be found and repaired with certainty!

The manufacturer is not liable for damages to persons or property caused by improper installation, operation or maintenance, not described in this manual.

Do not alter or modify the product or its accessories.

Any use other than described in this user`s manual is not permitted and causes loss of warranty, loss of guarantee, and non-liability.

CE CONFORMITY



PureLink GmbH hereby declares that the FX-I352 Series complies with Directive 2014/30/EU and the UK Electromagnetic Compatibility (Safety) Regulations 2016.

The full text of the Declarations of Conformity is available at the following Internet address:

www.purelink.de

DISPOSAL OF THE DEVICE



WEEE-Reg. No.: DE 93847290

According to the European WEEE directive, any electrical and electronic equipment must not be disposed with consumers waste. As a consumer, you are committed by law to reposit electrical and electronic devices to public collecting points or to the dealer for free at the end of the device's lifetime. Details are regulated in the respective national legislations. The garbage can symbol on the product, in the manual or on the packaging refers to these terms. With the return of your used devices you actively take part in protecting the environment.

DISCLAIMER

This product complies with the statutory national and European requirements. All company names and product names are trademarks of their respective owners.

All rights reserved.

We reserve our right for misprints and changes of the device, packing or user`s manual.

HDMI® is a registered trademark of HDMI Licensing L.L.C

Dolby and the double-D symbol are registered trademarks of Dolby Laboratories.



Von-Liebig-Straße 10
48432 Rheine
Deutschland

Carpenter Court, 1 Maple Road
Bramhall, Stockport
Cheshire SK7 2DH
United Kingdom

Tel.: +49 (0) 5971 800 299-0
Fax: +49 (0) 5971 800 299-99
info@purelink.de
www.purelink.de