

2-Port USB Boundless Cable KM Switch

CS62KM

The ATEN CS62KM is a 2-port USB Cable KM Switch that enables users to control up to 2 computers with a single keyboard and mouse. The CS62KM offers various innovative port selection methods for users to switch between the connected computers via remote port selector, keyboard hotkey, mouse cursor, and mouse wheel.

When users want to switch between the computers, simply press the built-in remote port selector to enjoy intuitive operations. In addition to making multitasking across two displays more efficient, this function is especially useful in emergencies that necessitate the immediate monitoring and management of computers.

One further advanced feature of the CS62KM includes buspowered mode which means no external power adapter is required. CS62KM simplifies administrative tasks, saves space, and increases work productivity, which is especially suitable for complex multitasking applications in control rooms across all industries.












Features

- Single USB keyboard and mouse control up to 2 computers
- Computer selection via remote port selector, hotkey, mouse cursor, and mouse wheel¹
- No software required
- Firmware upgradable
- Supports USB hot-plugging
- Bus-powered no external power adapter required²
- Works with Windows, iOS, Android, macOS, and Linux operating systems

Note:

- 1. Mouse port switching is only supported under mouse emulation mode with a USB 3-button mouse wheel.
- 2. The USB bus-powered design allows the switch to get power from the connected computers. It requires connection to two computers to get sufficient power supply.



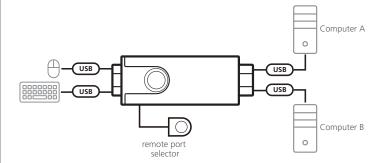

Specifications

	CS62KM
Computer Connections	2
Port Selection	Hotkey, Mouse Wheel, Mouse Cursor, Remote Port Selector
Connectors	
Console Ports	2 x USB Type-A Female
KVM (Computer) Ports	2 x USB Type-A Male
Remote Port Selector	1 x 2.5mm Audio Jack Female
LEDs	
Selected	2 (Green)
Cable Length	
Console	0.15 m
Computer	1.2 m
Remote Port Selector	1.8 m
Emulation	
Keyboard / Mouse	USB
Power Consumption	DC 5 V : 0.74 W
Environmental	
Operating Temperature	0 – 40 °C
Storage Temperature	-20 – 60 °C
Humidity	0 – 80% RH, Non-condensing
Physical Properties	
Housing	Plastic
Weight	0.12 kg
Dimensions (L x W x H)	8.45 x 3.40 x 2.21 cm

Product information is subject to change without prior notice.

Released: 01/2022 V3.0

© Copyright 2022 ATEN® International Co. Ltd.
ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.
All rights reserved. All other trademarks are the property of their respective owners

