

4-Port 10G Optical Input/Output Board

(4K@300m (K1, MM) / 10km (K2, SM))

VM7584 / VM8584

- The VM7584 4-Port 10G Optical Input Board and VM8584 4-Port 10G Optical Output Board offer an easy way to route 4 HDMI sources to HDMI displays through optical extenders, and up to 16/32 input and 16/32 output connections on an ATEN Modular Matrix Switch through various AV interfaces.

Designed with fiber optics technology for long-distance transmission, the VM7584/VM8584 along with its SFP+ modules extends uncompressed 4K signal up to 300 m (using VM7584K1/VM8584K1) or 10 km (using VM7584K2/VM8584K2) over duplex fiber optic cables. The optical fiber simplifies cabling by guaranteeing an interference-free long-haul transmission of audio, video, IR, and RS-232 control signals over one single set of duplex cables that easily connects to the SFP+ slot. Moreover, the VM7584/VM8584 supports a high data rate of 10.2 Gbps and meets HDMI Specifications that include 3D, Deep Color, and 4K to ensure superior video quality.

The ATEN VM input/output boards are hot-swappable which gives system integrators great flexibility and efficiency for installation and maintenance. The ATEN VM input/output boards along with ATEN Modular Matrix Switches offer ideal solutions that perfectly meet your demands for scalable video-critical applications.



VM7584



VM8584



VM7584K1/VM8584K1
SFP+ Duplex MM Transceivers (10 Gbps/300m, black)




VM7584K2/VM8584K2
SFP+ Duplex SM Transceivers (10 Gbps/10km, blue)



Features

- Compatible with the VM3250 / VM3200 / VM1600A; mix and match with modular I/O boards of any type for optimum flexibility
- Extends audio/video, IR, and RS-232 control signals over long distances via duplex fiber optic cables
- Superior video quality over long-distance transmission – up to 4096 x 2160@60Hz (4:2:0), 300m with VM7584K1/VM8584K1 over multimode cables or 10km with VM7584K2/VM8584K2 over single-mode cables
- **Scaler** – features a 4K video scaling function to convert input resolutions to the optimum display resolutions (VM8584)*
- **Seamless Switch™** – features close-to-zero second switching that provides continuous video streams, real-time switching, and stable signal transmissions (VM8584)*
- **Video Wall** – allows you to create custom video wall layouts via intuitive web GUI (VM8584)*
- HDMI (3D, Deep Color, 4K); HDCP 2.2 compatible
- Consumer Electronics Control (CEC) support
- **Bi-directional RS-232 channel** – allows you to connect to serial terminals or serial devices, such as touch screens and barcode scanners*
- **Bi-directional IR channel** – IR transmission is processed one direction at a time, ranging from 30 kHz to 60 kHz*
- **EDID Expert™** – selects optimum EDID settings for smooth power-up, high-quality display, and use of the best resolutions across different screens
- **FrameSync** – prevents image tearing by synchronizing the scaler output frame rate to the input signal frame rate (VM8584)*
- Hot-swappable fiber optic module and I/O boards for easy integration and maintenance

***Note:** The VM7584/VM8584 is designed to work with the VE883 video extender. The features are only available when used with the VE883.

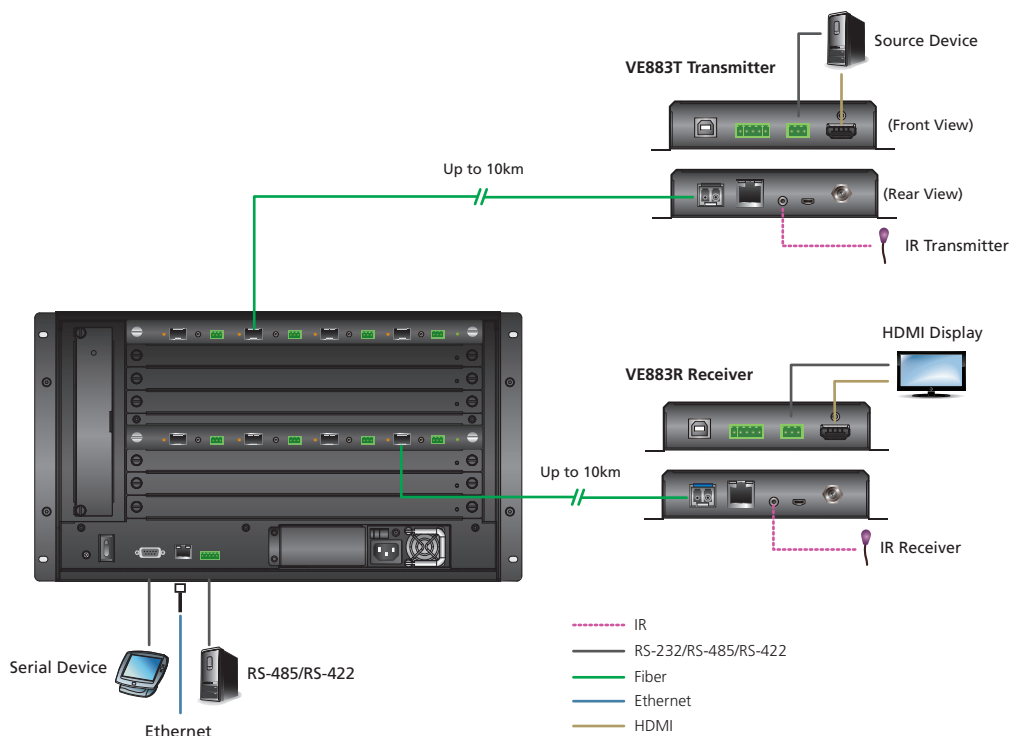

Note: It is required to upgrade the firmware of VE883 to the latest version before connecting it to the VM7584/VM8584.

Specifications

| Function | VM7584 | VM8584 |
|----------------------------|--|--|
| Fiber Optics | | |
| Data Rate | 10.3 Gbps | |
| Wavelength | VM7584K1: 850 nm VM7584K2: 1310 nm | VM8584K1: 850 nm VM8584K2: 1310 nm |
| Fiber Type | VM7584K1: Multimode (MM), OM3, LC Duplex Type; VM7584K2: Single-mode (SM), LC Duplex Type | VM8584K1: Multimode (MM), OM3, LC Duplex Type; VM8584K2: Single-mode (SM), LC Duplex Type |
| Video Input/Output | | |
| Interfaces | 4 x bi-directional SFP+ (LC) | |
| Video | | |
| Max. Data Rate | 10.2 Gbps (3.4 Gbps per lane) | |
| Max. Pixel Clock | 340 MHz | |
| Compliance | HDMI (3D, Deep Color, 4K) HDCP 2.2 compatible Consumer Electronics Control (CEC) | |
| Max. Resolution | Up to 4096 x 2160 / 3840 x 2160 @ 60Hz (4:2:0); 4096 x 2160 / 3840 x 2160 @ 30Hz (4:4:4) | |
| Max. Distance | VM7584K1: up to 300m (MM, OM3, Black) VM7584K2: up to 10km (SM, Blue) | VM8584K1: up to 300m (MM, OM3, Black) VM8584K2: up to 10km (SM, Blue) |
| Control | | |
| RS-232 Channel | 4 x Captive Screw Connectors, 3 pole | |
| IR Channel | 4 x Mini Stereo Jack Female (Black) | |
| LEDs | | |
| Status | 1 (Green) | |
| Link | 4 (Orange) | |
| Power Consumption | 10.54W | 22.96W |
| Environmental | | |
| Operating Temperature | 0 - 40°C | |
| Storage Temperature | -20 - 60°C | |
| Humidity | 0 - 80% RH, Non-Condensing | |
| Physical Properties | | |
| Housing | Metal | |
| Weight | 0.57 kg | 0.65 kg |
| Dimensions (L x W x H) | 35.20 x 23.8 x 2.33 cm | 35.20 x 23.8 x 2.33 cm |

Note

1. The operating distance may vary depending on the fiber type, network bandwidth, connector splicing, signal losses, modal or chromatic dispersion, environmental factors, and kinks.
2. ATEN recommends using single-mode optical fibers that conform to IEC60793-2-50 B1.1 or ITU-T G.652.B specifications; multimode optical fibers that conform to IEC11801 (OM3) specification.
3. The VM7584 is a class 1 laser product and complies with the safety regulations of IEC-60825, FDA 21 CFR 1040.10, and FDA 21 CFR 1040.11.

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 05/2020 V1.0



© Copyright 2020 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.