

Product Catalog

Digital conference system & Signal management

MENU

References & Exhibitions	01-06	A-3 Full digital network DSP conference system	23-36
A-1 Paperless multimedia conference system	07-16	Full digital networked DSP conference processor VIS-DCP2000-D	25
Paperless multimedia conference system		Digital touch screen unit VIS-DMD-T	25
11.6" Paperless desktop multimedia conference unit VIS-PMU-T	09	Digital touch screen unit VIS-MAU-T	25
11.6" Paperless array mic multimedia conference unit VIS-PMU-TR	09	Cat5 wired digital discussion unit VIS-DCC-T/VIS-DCD-T	26
11.6" Paperless flush-mount multimedia conference unit VIS-PMU-F	09	Wired discussion vote unit with channel selector VIS-DVC-T/VIS-DVD-T	26
Discussion & speaker module VIS-MDSP	10	Wired discussion IC card vote unit VIS-DVCIC-T/VIS-DVDIC-T	26
Discussion & IC module VIS-MDIC	10	Wired digital interpretation unit VIS-DIC-T/VIS-DID-T	27
Vote module VIS-MVOT	10	Wired digital discussion unit with dual channel VIS-DSC-T/VIS-DSD-T	27
Vote with IC card module VIS-MVIC	11	Digital flush-mount discussion unit VIS-DCC-F/VIS-DCD-F	28
Speaker module VIS-MSPK	11	Digital flush-mount 64 channel selector VIS-CSU-F	28
Retractable paperless multimedia screen		Digital voting with IC-card unit VIS-DVU-FS1	28
Retractable ultra-thin screen VIS-15/17/18/21LSSC	12	Flush-mount speaker unit VIS-SPK-F	29
Retractable screen with name plate VIS-15/17/18/21LDSC	12	Flush-mount all-in-one discussion unit with voting and channel selector VIS-FFC-F1/VIS-FFD-F1	29
Retractable paperless multimedia screen with microphone		Full digital networked DSP conference processor for array MIC VIS-DCP2000-R	30
Retractable ultra-thin screen with MIC VIS-15/17/18/21LSSCM	13	Digital array microphone unit VIS-DAC-T/VIS-DAD-T	30
Retractable ultra-thin screen with MIC and name plate VIS-15/17/18/21LDSCM	13	Digital array microphone with channel selector VIS-ACC-T/VIS-ACD-T	30
Paperless conference system server VIS-Server-E	14	Digital array microphone with lifting device VIS-DAC-F/VIS-DAD-F	31
Hub Switch VIS-SWITCH24	14	Extension main unit VIS-EXM	31
Software License VIS-PMU	15	Splitter box VIS-CNB	31
A-2 5G WiFi conference system	17-22	Software for conference system CLEACON SYSTEM	32
Full digital wireless DSP conference processor VIS-DCP2000-W	19	Software License VIS-DMD	35
WiFi wireless touch screen unit VIS-MAW-T	19	A-4 Full digital classic conference system	37-40
Wireless digital discussion unit VIS-WDC-T/VIS-WDD-T	19	Full digital networked conference processor VIS-DCP1000	39
Wireless digital discussion+voting unit VIS-WVC-T/ VIS-WVD-T	20	Cat5 digital wired discussion unit VIS-DEC-T/VIS-DED-T	39
Wireless digital discussion+voting+IC card unit VIS-WVCIC-T/ VIS-WVDIC-T	20	Cat5 digital wired discussion unit (physical button) VIS-DOC-T/VIS-DOD-T	39
5GHz conference access point VIS-AP4C	21		
Charger for battery VIS-WCH1	21		
Rechargeable battery pack VIS-WBTY1	21		

A-5 Digital IR language distribution system 41-46

Digital infrared transmitter VIS-VLI700A-4/8/16 43

Digital infrared receivers VIS-VLI703A-4/8/16/32 43

VIS-VLI703A-4/8/16/32 VIS-VLI701A 43

64 channels interpreter desk VIS-INT64 44

Analog audio extension controller VIS-AD16 44

Charger and storage box for receiver VIS-TC50A 45

Headphone for Delegates VIS-HPD 45

Headphone for Interpreter VIS-HPI 45

A-6 AUDIO LINK™ network audio system 47-52

Microphone interface box VIS-AIB 49

Flush mount boundary microphone VIS-BDY-F 49

Flush mount microphone base VIS-GSK-F 49

Analog array microphone unit VIS-PTA-T 50

Handheld microphone VIS-HM100 50

Full digital interface box VIS-CIB 50

Digital DSP audio matrix VIS-DSP4/8/12/16 51

Automatic feedback suppressor VIS-FS100-A/FS100 51

POE column speaker VIS-SPK2/4/6/8/12-AL 51

A-7 Camera auto tracking and recorder 53-58

Professional audio/video recorder VIS-CRS02/03/05 55

Camera auto-tracking controller(SDI) VIS-CATC-A 55

Camera auto-tracking controller(USB) VIS-CATC-B 55

Full HD camera VIS-CDC-S/30-S/U 56

UHD camera VIS-CDC-4K 56

Auto-tracking camera VIS-TCAMH 57

Precision Camera Controller VIS-CKB1 57

A-8 Accessories 59-60

B-1 M5 modular seamless matrix switcher 61-66

modular seamless matrix switcher VW-VL0808 63

modular seamless matrix switcher VW-VL1616 63

modular seamless matrix switcher VW-VL3636 63

modular seamless matrix switcher VW-VL7272 64

modular seamless matrix switcher VW-VL144144 64

Control software VIS-M5SOFT 65

B-2 X9 series seamless modular switcher 67-72

Modular seamless switching video wall processor VW-VW0808 69

Modular seamless switching video wall processor VW-VW1616 69

Modular seamless switching video wall processor VW-VW3636 69

Modular seamless switching video wall processor VW-VW7272 70

Modular seamless switching video wall processor VW-VW144144 70

Built-in web interface in control card VIS-CON ENT5 71

B-3 4K matrix and transmitter 73-77

4x4 4K HDMI matrix VIS-PHD44 75

8x8 4K HDMI matrix VIS-PHD88 75

16x16 4K HDMI matrix VIS-PHD1616 75

HDbaseT extender for 70m VIS-HE7 76

HDbaseT extender for 100m VIS-HE10 76

HDMI/VGA to HDbaseT Wallplate VIS-HE20 76

B-4 Seamless matrix and video wall processor 78-79

4K UHD matrix and video wall processor VIS-UHD0808-VW 78

Professional scaler switcher VIS-PSC1202 78

4x1 multi-viewer and 12x1 switcher with KVM VIS-Quad41 78

7x1 multi-viewer with KVM VIS-QuadKVM 79

7x1 multi-viewer & scaler VIS-MV71 79

References



Deutsch-russisches forum



Administration of the Solnechnogorsk District



USA San Antonio Housing Authority



Research institute



Municipality



Boardroom

References



Dubai University



Parliament in Spain



Federal congress



Kuwait University



Chamber of Commerce



Russian Duma Conference Hall

References



2018 China-Africa Cooperation Beijing Forum



2018 Shanghai Cooperation Organization(SCO)Summit



Belt and Road Cooperation Forum



Interior of CICA Summit




people's daily conference room



Shenyang Taoxian International Airport

References

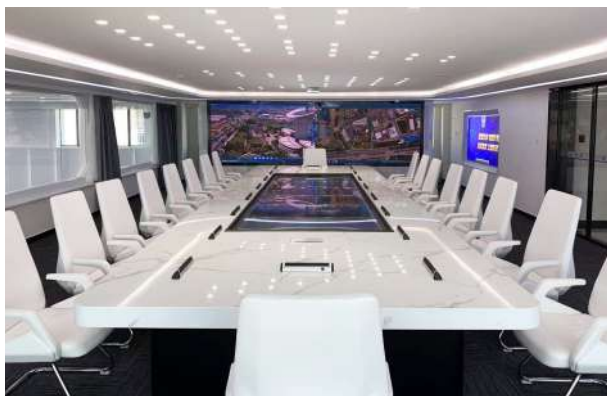

Wuhan Public Security



China Telecom



Nanjing University of Chinese Medicine



Top 500 enterprise projects



Public security project



Huangpu Customs office

Exhibitions



2021 Beijing Infocomm China



2020 Beijing Infocomm China



2019 India infocomm exhibition



2021 Prolight+Sound Exhibition



2020 Prolight+Sound Exhibition



2018 Prolight+Sound Exhibition

Exhibitions



2021 Europe ISE Exhibition



2020 Europe ISE Exhibition



2019 Europe ISE Exhibition



Italy Exhibition



France exhibition



Road show in Europe

Flexible reservation before the conference
 Guidance and assistance during the conference
 Summary and export after the conference



A-1

Paperless multimedia conference system

Using network to share information and create a friendly environment, VISSONIC paperless conference system adopts latest Web standard development protocol to make conference information display faster, lower delay, and more secure.

VISSONIC Paperless Conference is a multimedia conference device that uses network, which can replace the complicated traditional paper conferences and provide users with a more intelligent, efficient and environmentally friendly way.

The modular design brings users a more intelligent paperless conference experience. If any unit fails suddenly, it will not affect the normal operation of whole meeting because of adopting the hand-in-hand structure.

High Security

Many companies and government meetings attach great importance to the information security of meeting. By our VSCON-Giga technology, all materials can be encrypted to transmit, and the documents will not be leaked. It provides one-click cleanup function after the meeting, so that the documents only exist on the site.

The hand-in-hand network ring structure will provide users with hardware security. The "dual backup power" can prevent equipment from unexpected situation caused by cable failures.

Modular design

It's flexible to select corresponding module according to the conference needs, which makes different functions choice easy.

Multi-functions ready

The full HD touch screen provides users with a series of operation instructions such as display, interaction, etc. It is equipped with cardioid gooseneck microphone or hidden array microphone for stronger sound pickup. It also supports interconnection control with the Audio Link audio protocol. Common functions include: voting, sync screen, simultaneous interpretation, whiteboard, meeting guidance, data storage, IC card sign-in, etc.





Government



Enterprise

Application scenario





Paperless multimedia conference system

New experience of paperless meetings

Desktop design, rapid deployment

Hand-in-hand ring connection, the meeting is more reliable



VIS-PMU-T

11.6" Paperless desktop multimedia conference unit

- 11.6-inch color touch screen, resolution 1920x1080
- Modular structure, modules can be combined freely
- Wired 1+63 simultaneous interpretation and voting
- The USB interface can be used to update firmware and link the electronic nameplate
- Hidden wiring at the bottom makes the desktop neat and tidy
- Certified RFID card identity authentication for signing in, discussion and vote

VIS-PMU-TR

11.6" Paperless array mic multimedia conference unit

- 11.6-inch color touch screen, resolution 1920x1080
- Array microphone design for long distance sound pickup
- Modular structure, modules can be combined freely
- Wired 1+63 simultaneous interpretation and voting
- The USB interface can be used to update firmware and link the electronic nameplate
- Hidden wiring at the bottom makes the desktop neat and tidy
- Certified RFID card identity authentication for signing in, discussion and vote

VIS-PMU-F

11.6" Paperless flush-mount multimedia conference unit

- 11.6-inch color touch screen, resolution 1920x1080
- Flush mount design
- Modular structure, modules can be combined freely
- Wired 1+63 simultaneous interpretation and voting
- The USB interface can be used to update firmware and link the electronic nameplate
- Hidden wiring at the bottom makes the desktop neat and tidy
- Certified RFID card identity authentication for signing in, discussion and vote



VIS-MDSP

Discussion & speaker module

- Removable gooseneck microphone
- Built-in high-fidelity speakers
- Special connecting design for easy mount
- Front soft light LED indicator
- Hardware function module can transmit full digital signals
- Cooperate with VIS-PMU to realize speech functions



VIS-MDIC

Discussion & IC module

- Removable gooseneck microphone
- Built-in high-fidelity speakers
- Special connecting design for easy mount
- Front soft light LED indicator
- Hardware function module can transmit full digital signals
- Cooperate with VIS-PMU to realize speech and IC card sign in functions



VIS-MVOT

Vote module

- Three voting or rating physical buttons
- Special connecting design for easy mount
- Front soft light LED indicator
- LED flashes to guide users to vote
- Hardware function module can transmit full digital signals
- Cooperate with VIS-PMU to realize voting or rating



Paperless multimedia conference system



VIS-MVIC

Vote with IC card module

- IC card for authentication
- Special connecting design for easy mount
- Front soft light LED indicator
- LED flashes to guide users to sign in/vote
- Hardware function module can transmit full digital signals



VIS-MSPK

Speaker module

- High-fidelity speakers
- Special connecting design for easy mount
- Unique acoustic optimization, accurate audio restoration
- Hardware function module can transmit full digital signals
- Cooperate with VIS-PMU to realize local sound reinforcement functions



Retractable paperless multimedia screen



VIS-15/17/18/21LSSC

Retractable ultra-thin screen

- Ultra-thin full HD IPS panel with 1080P resolution
- Light weight body design, high-speed silent motor control lift
- Adjustable display brightness, color and other parameters
- Supports input of HDMI/VGA signals
- Buttons on the panel can switch signal between HDMI and VGA



VIS-15/17/18/21LDSC

Retractable screen with name plate

- Ultra-thin full HD IPS panel with 1080P resolution
- Light weight body design, high-speed silent motor control lift
- 10.1 inch rear display
- Adjustable display brightness, color and other parameters
- Supports input of HDMI/VGA signals
- Buttons on the panel can switch signal between HDMI and VGA



Retractable paperless multimedia screen with microphone



VIS-15/17/18/21LSSCM

Retractable ultra-thin screen with MIC

- Ultra-thin full HD IPS panel with 1080P resolution
- Retractable display and microphone
- Light weight body design, high-speed silent motor control lift
- Adjustable display brightness, color and other parameters
- Supports input of HDMI/VGA signals
- Buttons on the panel can switch signal between HDMI and VGA



VIS-15/17/18/21LDSCM

Retractable ultra-thin screen with MIC and name plate

- Ultra-thin full HD IPS panel with 1080P resolution
- 10.1 inch rear display
- Retractable display and microphone
- Light weight body design, high-speed silent motor control lift
- Adjustable display brightness, color and other parameters
- Supports input of HDMI/VGA signals
- Buttons on the panel can switch signal between HDMI and VGA



VIS-Server-E

Paperless conference system server


- 2U high-strength metal chassis
- Can resist 6KV strong electromagnetic interference
- Used for paperless meeting management suite and software services
- Reinforced aluminum alloy panel chassis, standard 2U server structure
- CPU: I5-4460 Memory: 8GB DDR3 Hard disk: 128G SSD



VIS-SWITCH24

Hub Switch

- Dual Gigabit Ethernet ports
- 24x100M Ethernet ports
- Support the link and communication of conference unit
- Status indicator for network port diagnosis
- Can be linked to conference controller or cascade
- Monitor and display the temperature in the case, intelligent cooling fan
- Reinforced aluminum alloy panel chassis

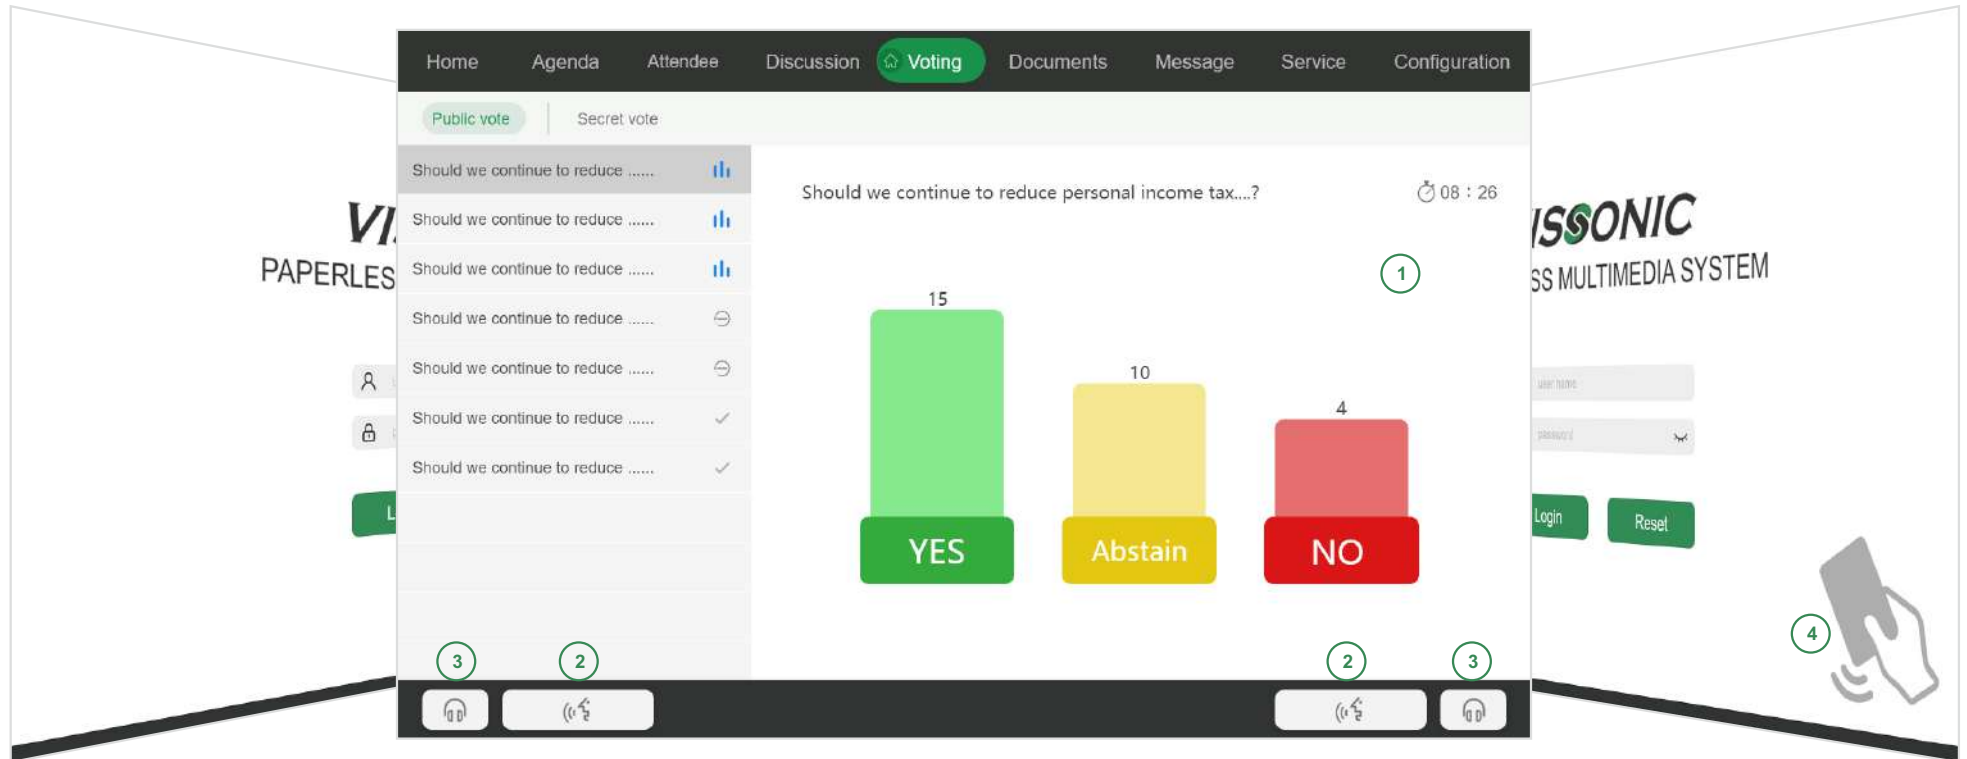

VIS-PVOT ①

Voting software module

- Five voting or rating buttons
- Can realize 2, 3, 5 key voting or rating
- License suitable for touch screen unit

VIS-PDUL ②

Dual user software module

- Identify multiple user identities
- Cooperate with simultaneous interpretation to achieve two groups of simultaneous interpretation options
- License suitable for touch screen unit

VIS-PLGE ③

Dual channel selector

- Simultaneous interpretation channel selector
- The user interface realizes two sets of simultaneous interpretation buttons
- License suitable for touch screen unit

VIS-PIND ④

NFC IC card software module

- NFC sign-in or identity authentication
- Physical encryption card authentication
- License suitable for touch screen unit

Easy installation

Compared with traditional paperless equipment, our portable design can make the user's conference table tidier and more elegant without destroying the original table structure. It only needs a tiny hole for cat5 cable to achieve power supply and data transmission. And hand-in-hand network structure provides multiple guarantees for the conference. It is suitable for any type of meeting room.

Easy expansion

Using VSCON-Giga transmission will support intercommunication with the Audio Link protocol. Users can control the microphone volume, balance, lift and others of the paperless device, from multiple devices such as the central control, iPad, computer, even wall panel. Built-in dual headphone jacks and high-fidelity speakers.


Smart and efficient choice!

Special design

Texture: The metal enclosure is equipped with a fine frosting treatment process, and the high-end atmosphere has a hidden outlet at the bottom.

Watch: high-resolution LCD touch screen, multi-color LED indicator and brightness adjustment.

Touch: The multi-point capacitive touch screen supports multiple gestures and responds more quickly.

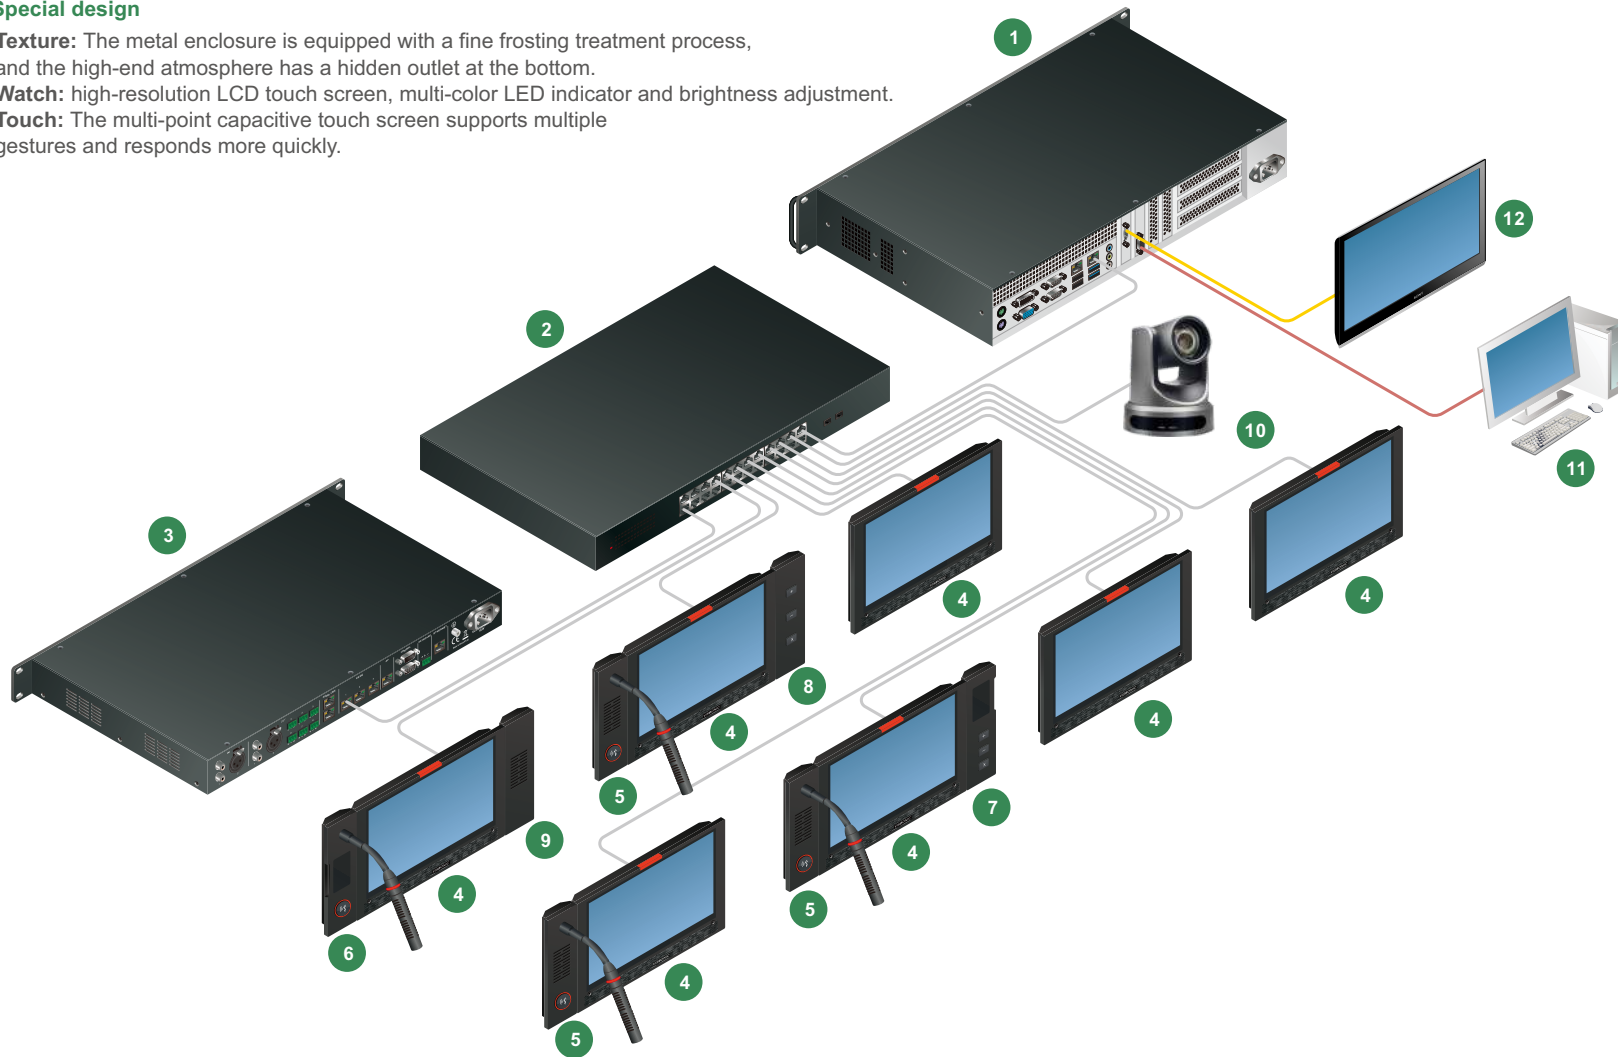

- 1 VIS-Server-E Paperless conference system server
- 2 VIS-SWITCH24 Hub Switch
- 3 VIS-DCP2000-W Full digital wireless DSP conference processor
- 4 VIS-PMU-T 11.6" Paperless desktop multimedia conference unit
- 5 VIS-MDSP Discussion & speaker module
- 6 VIS-MDIC Discussion & IC module
- 7 VIS-MVIC Vote with IC card module
- 8 VIS-MVOT Vote module
- 9 VIS-MSPK Speaker module
- 10 VIS-CDC Full HD camera
- 11 PC
- 12 HD display

- CAT5e
- HDMI
- VGA

6 discussion modes, used for various conference demands.



A-2

5G WiFi Conference system

VISSONIC CLEACON, make wireless come true
 The major pain point on traditional meeting room is to connect all devices by cable, which is complex and wasting of time. VISSONIC Wireless conference system, start the meeting in anytime, anywhere, increase the efficiency on planning.

Standard Wi-Fi technology to co-work perfectly with existing networks
 CLEACON wireless unit, choose the frequency point from dozens of available ones on our access point, working in zero interference with all other networks in the area.

Efficient and conference
 The wireless conference system can easily deploy units with 2 to 4096 seats. An access point (VIS-AP4C) can easily cover small and medium-sized meeting rooms (10m²~200m²). The unit can roam in multiple access points and always maintain stable connection state.

In order to achieve various types of conferences, the system has built-in as many as 6-7 speech modes, 4 voting methods, USB recording, and a small wireless simultaneous interpretation function, which meet all the demands.

The conference system delivers clear voices to all participants. Moreover, its simple and user-friendly interface allows all first-time users to quickly get started without training.

Unique authentication technology
 Anti-interference of wireless conference is very important, so we have the unique authentication technology. Its authentication ways includes (hidden SSID) only based on locally managed filtering (IEEE MAC) address, which blocks out connections from strange devices to ensure the stability of wireless conference.

Work at stable WiFi band
 When the user expand the scale of conference, the access point connects to the units through Mesh technology. The solution is a multi-band wireless conference system that also works in the license-free 5GHz band. This will give you a multitude of channels to work in and allows you to stay out of the very busy 2.4GHz band. Moreover, it will make maintenance easy because it is not messing with the Wireless LAN in your building.





Government



Enterprise


Application scenario





Wireless deployment brings simple and efficient conference experience

Using 5G frequency band, the signal is stable and anti-interference
Optimized transmission makes the sound quality more perfect

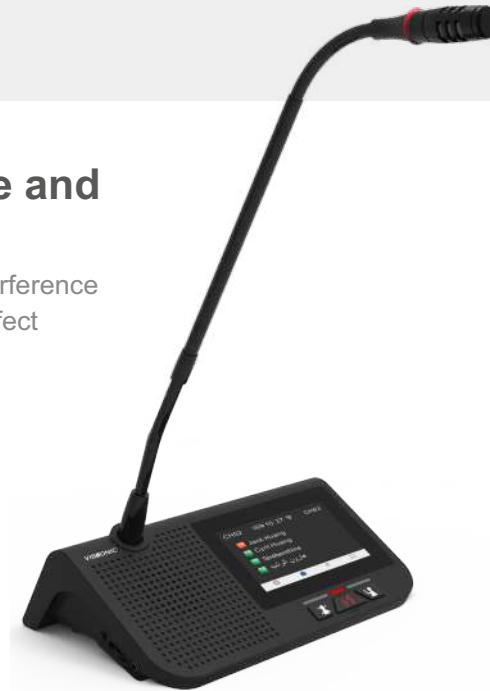

VIS-DCP2000-W

Full digital wireless DSP conference processor

- Work with both wired and wireless conference units
- A CAT5e network cable transmits 64 channels of audio and various information
- With extension main unit, the conference units can be expanded to 5200
- Full digital signal transmission and processing is compatible with Dante module
- Audio partition realizes separate output
- Record and monitor by USB and has camera auto-tracking function
- 16-segment balanced EQ, hand-in-hand loop network connection

VIS-MAW-T

WiFi wireless touch screen unit

- 4.3 inch color touch screen
- The software sets the units as chairman, delegate, VIP or dual users
- Dual-channel, 5G WiFi and wired network, for communication
- Can be powered by cable, rechargeable battery or dock directly
- Built-in dual headphone ports
- Can choose wireless or wired transmission easily
- Built-in RFID card authentication, sign-in by IC card, discussion and voting (optional)

VIS-WDC-T/VIS-WDD-T

Wireless digital discussion unit

- Pluggable microphone, built-in high-fidelity speakers and dual headphone ports
- Removable battery pack can work continuously for 24 hours when fully charged
- Unit with Line in port, EQ and volume adjustment
- AGC technology can automatically adjusts the appropriate output when users is not directly facing the microphone to speak
- OLED display, showing the status and speech time.
- With the function of sign-in by software and discussion
- Chairman unit can approve or reject speaking request



VIS-WVC-T/VIS-WVD-T

Wireless digital discussion +voting unit

- Multiple forms of voting, also displaying vote results
- Pluggable microphone, built-in high-fidelity speakers and dual headphone ports
- Removable battery pack can work continuously for 24 hours when fully charged
- With Line in port, independent EQ and volume adjustment
- AGC can automatically adjusts the appropriate output when users is not directly facing the microphone to speak
- OLED display, showing the status and time of the speech
- With the function of sign-in by software, voting and discussion
- Chairman unit can approve or reject the speaking request

VIS-WVCIC-T/VIS-WVDIC-T

Wireless digital discussion+voting+IC unit

- Multiple forms of voting, also displaying vote results
- Pluggable microphone, built-in high-fidelity speakers and dual headphone ports
- Removable battery pack can work continuously for 24 hours when fully charged
- Unit with Line in port, independent EQ and volume adjustment
- AGC can automatically adjusts the appropriate output when users is not directly facing the microphone to speak
- Built-in RFID card authentication, sign-in by IC card, discussion and voting (optional)
- Chairman unit can approve or reject the speaking request



VIS-AP4C 5GHz conference access point

- Mesh wired or wireless backhaul to realize the roaming of multiple conference Aps
- Single device coverage radius of 25m (10m²~200m²)
- Two installation methods (wall-mount, ceiling-mount) to get the best receiving effect
- Unique authentication technology to prevent eavesdropping and unauthorized access



VIS-WCH1 Charger for battery

- Fully charged within 3 hours
- 8 batteries are charged simultaneously
- The charging box is cascaded
- The dual-color LED indicator shows the charging status



VIS-WBTY1 Rechargeable battery pack

- High-efficiency lithium battery with 4900mAh capacity meets air transportation standard
- Built-in microprocessor controls fast charging and trickle charging to achieve safety and stability

Flexible deployment

The concept of wireless has spread to all fields, perhaps users are not looking for "wireless" but "convenience". Conference devices can be expanded infinitely without cable bondage. The signal transmitting and receiving processing can be realized with only one cable. There is no need to purchase a large number of conference controllers to achieve expansion, nor to set up and debug room by room.

Compatible Expansion

Different from traditional wireless conference systems, VISSONIC conference system is equipped with Audio Link™ audio protocol, which can be used for network-based central control, and can also be used for conference linkage with the camera through the RS232/485 port.

It is compatible with conference equipment such as Dante Microphone and digital mixer.


Equipped with audio box, it can also be compatible with third-party analog audio equipment.

Featured Functions





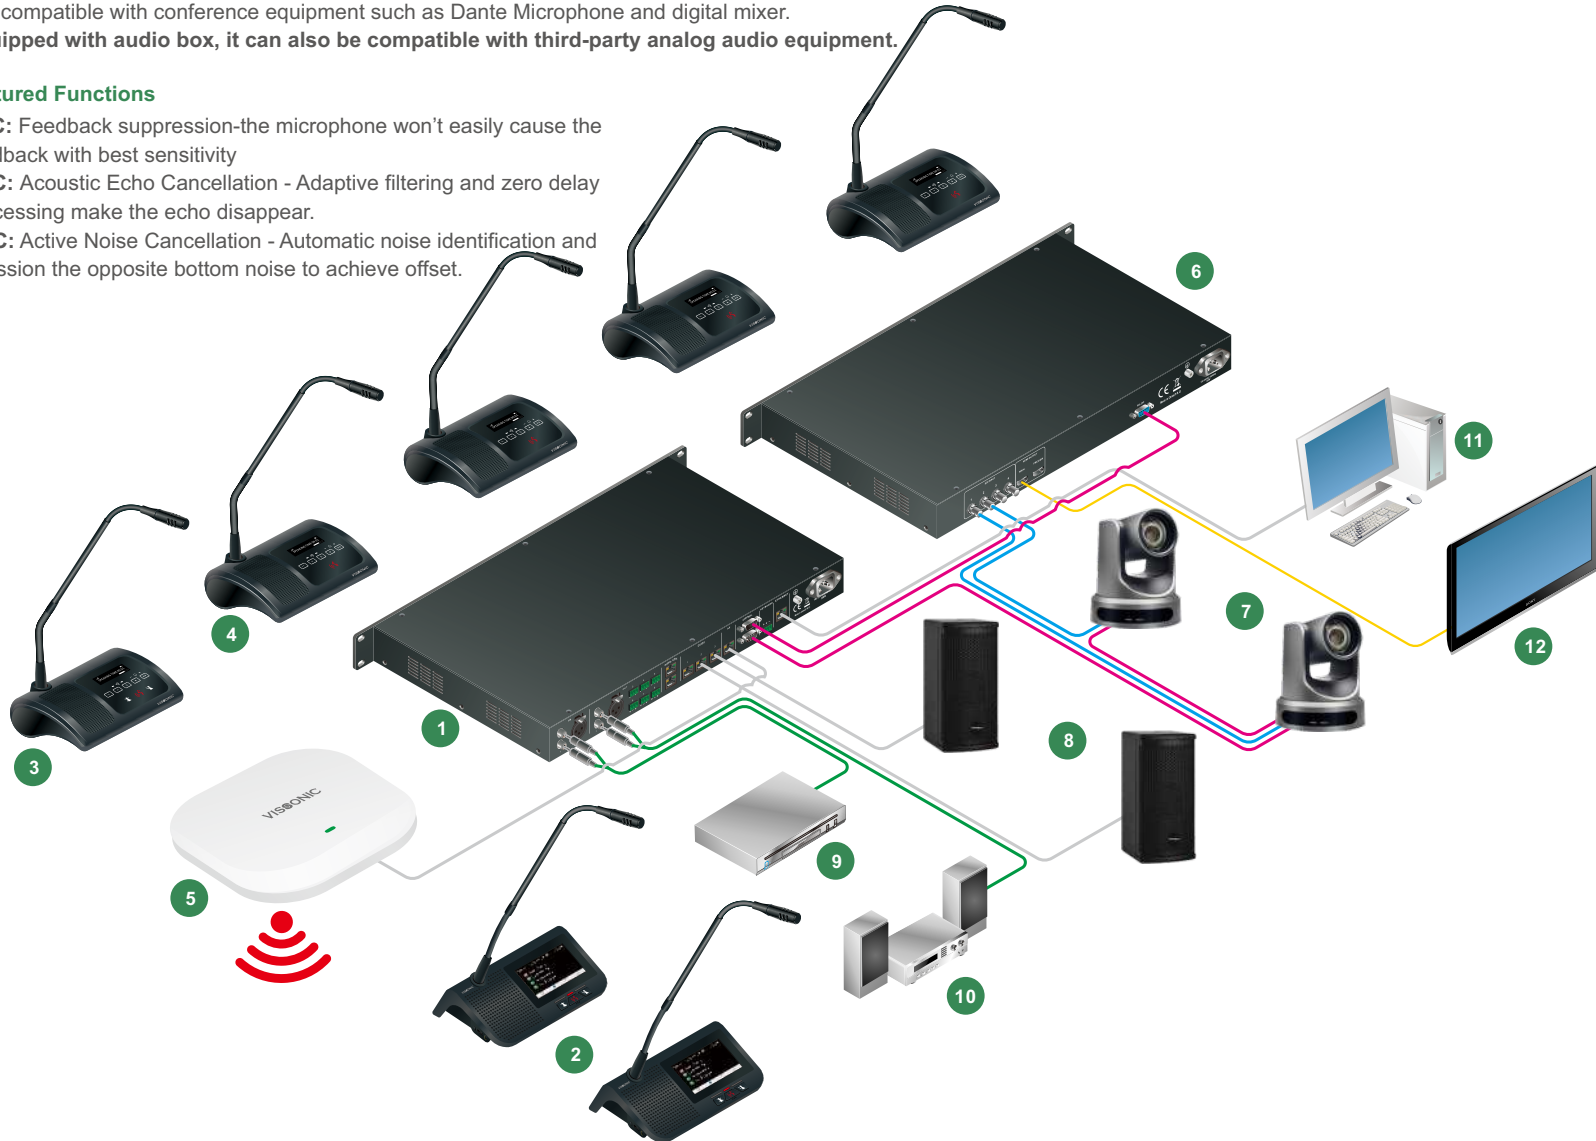

AFC: Feedback suppression-the microphone won't easily cause the feedback with best sensitivity

AEC: Acoustic Echo Cancellation - Adaptive filtering and zero delay processing make the echo disappear.

ANC: Active Noise Cancellation - Automatic noise identification and emission the opposite bottom noise to achieve offset.



- 1 VIS-DCP2000-W
Full digital wireless
DSP conference processor
- 2 VIS-MAW-T
WiFi wireless touch screen unit
- 3 VIS-WVC-T
Wireless digital discussion
chairman unit
- 4 VIS-WVD-T
Wireless digital discussion
delegate unit
- 5 VIS-AP4C
5GHz conference access point
- 6 VIS-CATC-A
Camera auto-tracking controller
- 7 VIS-CDC
Full HD camera
- 8 VIS-SPK SERIES
POE comumn speaker
- 9 DVD
- 10 Power amplifier
- 11 PC
- 12 HD display

-  5G WiFi
-  CAT5e
-  HDMI
-  SDI
-  RS-232
-  Audio

6 discussion modes used for various conference demands



A-3

Full digital network DSP conference system

Over the years, we have developed diversified product lines and selected the most suitable conference products for users.

Based on the unique audio processing technology, such as AGC, ANC and AFC, wired full digital conference system can make the sound reinforcement of the equipment reach a larger volume without howling.

Nowadays, intelligent meetings have gradually become a trend. Full digital conference system can realize network management and appointment without complicated settings, thus saving more precious time.

Touch-screen, versatile and easy to understand

Compared with traditional microphones with few functions, touch-screen conference system provides a new touch control experience for meetings. Users can view agenda, speech list, or attendee list from screen of conference unit.

Flat ICONS and guidance interfaces help users quickly learn about various functions, reduce learning costs, and enable participants to use well during meetings instead of just speaking.

The unit is also equipped with meeting-specific functions, such as service application, topic viewing, brightness adjustment, time display and other useful functions.

Stable connection technology

The current conference connection technology methods, such as ring hand-in-hand, star-shaped, and hybrid connection modes, provide users with data and power supply guarantee. Any unit failure will not affect the normal operation of other units.

There is always a good design for users

For good sound pickup range, there is array microphone, which is composed of 17 highly sensitive pickup microphone cores. The pickup distance radius is 80-150cm, and the angle is about $\angle 160^\circ$. It has a super sound pickup effect. Equipped with AFC feedback suppression technology, it can perform sound reinforcement when speaking without howling. Flush mount microphones can provide combinations such as discussion, voting and simultaneous interpretation for users to freely combine. The connection is simple and suitable for various conference scenarios.





Government



Enterprise

Application scenario



There is always a good design for users

The design and various installation methods make it more flexible
The ring hand-in-hand connection makes the meeting more reliable



VIS-DCP2000-D

Full digital networked DSP conference processor

- A CAT5e network cable transmits 64 channels of audio and various information
- With extension main unit, the conference units can be expanded to 5200
- Full digital signal transmission and processing is compatible with Dante module
- Audio partition realizes separate output
- Record and monitor by USB and has camera auto-tracking function
- 16-segment balanced EQ, hand-in-hand loop network connection

VIS-DMD-T

Digital touch screen unit

- 5 inch color touch screen
- Software sets as chairman, delegate, VIP or dual delegates
- With internal loudspeaker
- Display the list of speaker, request speaking list, count-down or fixed time speaking list
- Dual-user mode divides two users to use one unit
- NFC, simultaneous interpretation, dual user and Bluetooth modules are available
- Built-in dual headphone ports and switch between digital and analog output via pluggable microphone
- Built-in RFID card authentication, sign-in by IC card, discussion and voting (optional)

VIS-MAU-T

Digital touch screen unit

- 4.3 inch color touch screen
- Software sets as chairman, delegate, VIP or dual delegates
- With internal loudspeaker
- Wired network for communication
- Can be powered by cable, rechargeable battery or dock directly
- Built-in dual headphone ports and switch between digital and analog output via pluggable microphone
- Optional wireless or wired output, switch output without interrupting the speech
- Built-in RFID card authentication, sign-in by IC card, discussion and voting



VIS-DCC-T/VIS-DCD-T

Cat5 wired digital discussion unit

- OLED display, showing the status and speech time
- Pluggable microphone, built-in high-fidelity speakers and dual headphone ports
- Unit with Line in port, EQ and volume adjustment
- AGC technology can automatically adjusts the appropriate output when users is not directly facing the microphone to speak
- AFC technology enables local sound reinforcement although the pickup distance is long
- With the function of sign-in by software
- Chairman unit can approve or reject speaking request



VIS-DVC-T/VIS-DVD-T

Wired discussion vote unit with channel selector

- OLED display, showing the status and time of the speech
- Pluggable microphone, built-in high-fidelity speakers and dual headphone ports
- AGC technology can automatically adjusts the appropriate output when users is not directly facing the microphone to speak
- AFC technology enables local sound reinforcement
- 64 channels of simultaneous interpretation with display of languages and channels
- With the function of sign-in by software, voting/discussion
- Chairman unit can approve or reject the speaking request



VIS-DVIC-T/VIS-DVDIC-T

Wired discussion IC card vote unit

- OLED display, showing the status and time of the speech
- Pluggable microphone, built-in high-fidelity speakers and dual headphone ports
- AGC technology can automatically adjusts the appropriate output when users is not directly facing the microphone to speak
- AFC technology enables local sound reinforcement
- 64 channels of simultaneous interpretation with display of languages and channels
- Built-in RFID card authentication, sign-in by IC card or software, discussion and voting
- Chairman unit can approve or reject the speaking request



VIS-DIC-T/VIS-DID-T

Wired digital interpretation unit

- OLED display, showing the status and speech time
- Pluggable microphone, built-in high-fidelity speakers and dual headphone ports
- AGC technology can automatically adjust the appropriate output when users are not directly facing the microphone to speak
- AFC technology enables local sound reinforcement although the pickup distance is long
- There are 64 channels of simultaneous interpretation with display of languages and channels
- With the function of sign-in by software
- Chairman unit can approve or reject speaking request

VIS-DSC-T/VIS-DSD-T

Wired digital discussion unit with dual channel

- OLED display, showing the status and speech time
- Pluggable microphone, built-in high-fidelity speakers and dual headphone ports
- AGC technology can automatically adjust the appropriate output when users are not directly facing the microphone to speak
- AFC technology enables local sound reinforcement although the pickup distance is long
- 1+31 channels of simultaneous interpretation with display of languages and channels
- With the function of sign-in by software
- Chairman unit can approve or reject speaking request



VIS-DCC-F/VIS-DCD-F

Digital flush-mount discussion unit

- Pluggable microphone and 3.5mm earphone jack
- The touch button makes no noise when the participant speaks
- Can be used independently as a simple discussion unit
- Units is with hot swap function and automatic recovery function
- The chairman unit has three buttons: priority, apply and speak
- When used together with other flush mount modules, it can have voting or simultaneous interpretation functions
- Chairman unit can approve or reject the speaking request



VIS-CSU-F

Digital flush-mount 64 channel selector

- Display the currently applied channel
- Can be used independently as Simultaneous interpretation channel selector
- Units is with hot swap function and automatic recovery function
- Up to 64 language channels including the original sound channel
- When used together with other flush mount modules, it can have voting or discussion functions
- All channels have 48kHz audio sampling and 30Hz~20kHz frequency response



VIS-DVU-FS1

Digital voting with IC-card unit

- Unit can be plug and play
- Five buttons to vote or rate
- Touch button with indicator light
- Built-in IC card sign-in or button sign-in
- Up to 3000 voting units can be connected
- Can automatically detect and be viewed device status
- When used together with other flush mount modules, it can have voting or discussion functions



VIS-SPK-F

Flush-mount speaker unit

- All aluminum alloy body with metal mesh cover
- High-fidelity speaker unit with clear sound and high reproduction
- It should be used with VIS-DCC-F/VIS-DCD-F together
- It can work at a temperature of 0°C~50°C without loss of sound quality



VIS-FFC-F1/VIS-FFD-F1

Flush-mount all-in-one discussion unit with voting and channel selector

- Physical buttons
- Built-in IC card sign-in or button-press sign-in
- Pluggable microphone and 3.5mm earphone jack
- Built-in high-fidelity speaker with clear sound
- Up to 64 language channels including the original sound channel
- Lossless technology with 48K audio sampling and 20Hz~20KHz response frequency
- Chairman unit can approve or reject speaking request



VIS-DCP2000-R

Full digital networked DSP conference processor for array MIC

- It can be used for both wired and wireless conference
- A CAT5e network cable transmits 64 channels of audio and various information
- With extension main unit, the conference units can be expanded to 5200
- Full digital signal transmission and processing is backward compatible with Dante module
- Audio partition realizes separate output
- Record and monitor by USB and has camera auto-tracking function
- 16-segment balanced EQ, hand-in-hand loop network connection and dual controller backup



VIS-DAC-T/VIS-DAD-T

Digital array microphone unit

- All aluminum alloy body with metal mesh cover
- ARRA-Tech™ array microphone technology
- The pickup distance is not less than 80cm and the range is $\angle 160^\circ$
- Touch buttons make the microphone on/off noiseless
- Comes with 2m cable to connect to the splitter to keep the desktop tidy
- Lossless technology with 48K audio sampling and 20Hz~20KHz response frequency
- Chairman unit can approve or reject speaking request



VIS-ACC-T/VIS-ACD-T

Digital array microphone with channel selector

- ARRA-Tech™ array microphone technology
- The pickup distance is not less than 80cm and the range is $\angle 160^\circ$
- Touch buttons make the microphone on/off noiseless
- There are 64 channels of simultaneous interpretation with display of languages and channels
- Comes with 2m cable to connect to the splitter to keep the desktop tidy
- Lossless technology with 48K audio sampling and 20Hz~20KHz response frequency
- Chairman unit can approve or reject speaking request



VIS-DAC-F/VIS-DAD-F

Digital array microphone with lifting device

- Flush mount, support button or remote control
- All aluminum alloy body with metal mesh cover
- ARRA-Tech™ array microphone technology
- The pickup distance is not less than 80cm and the range is $\angle 160^\circ$
- Touch buttons make the microphone on and off noiseless
- Comes with 2m cable to connect to the splitter to keep the desktop tidy
- Lossless technology with 48K audio sampling and 20Hz~20KHz response frequency
- Chairman unit can approve or reject speaking request



VIS-EXM

Extension main unit


- Maximum output 150W
 - A single unit can be expanded to 120 conference units
 - Expand 4 channels to connect the chairman or delegate unit
 - Use a dedicated power supply to achieve no fan noise
 - The maximum cascading distance between extension main unit is 100 meters
- Support connection of 4 DANTE speakers or Audio Link speakers



VIS-CNB

Splitter box


- Support ring and star topology connection
- Long-distance wiring signal transmission, used as signal extension
- The connection unit only needs one cable to complete power supply and data transmission
- Realize the splitter cascade connection, each splitter divides into 2 branches function
- When used as passive small network switch, can connect 3 signal stations (VIS-AP4C)

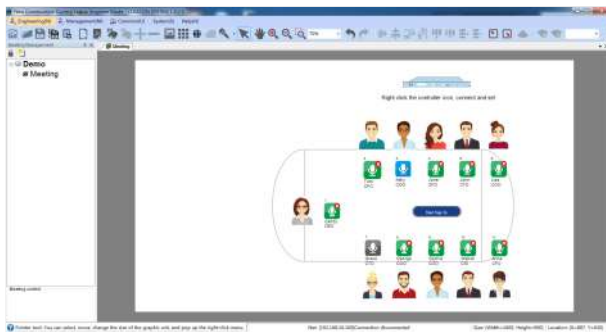

VIS-CLEACON SETUP

Conference management software module


- Exclusive software module for conference management
- Realize the venue design
- Sets up user and on-site topics and themes
- Detects the online and offline status and ID number
- Monitor the signal strength and battery power

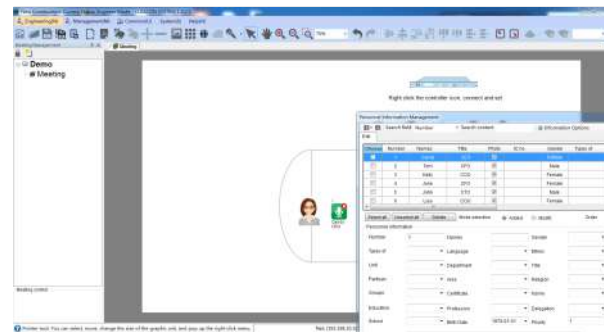

VIS-CLEACON MIC

Microphone control software module

- Microphone control software module
- Arrange user's seats and microphones
- Name and microphone ID settings
- Online monitoring of all microphone status, real-time control of microphone
- Import and export of Excel documents can be realized

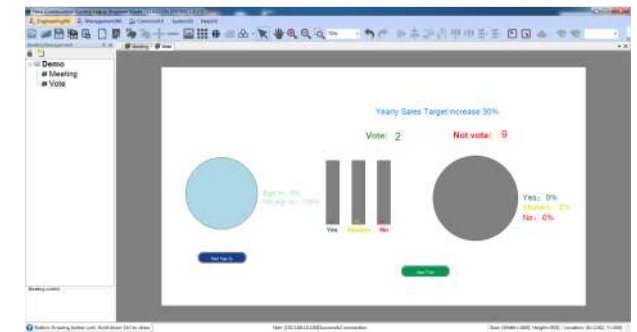


VIS-CLEACON VOTE

Meeting voting management module

- Voting control software module
- Various voting management
- Real-time viewing of voting on projection of large screen
- Show the sign-in before the meeting starts
- Import and export of Excel documents can be realized

CLEACON SYSTEM


Software for conference system

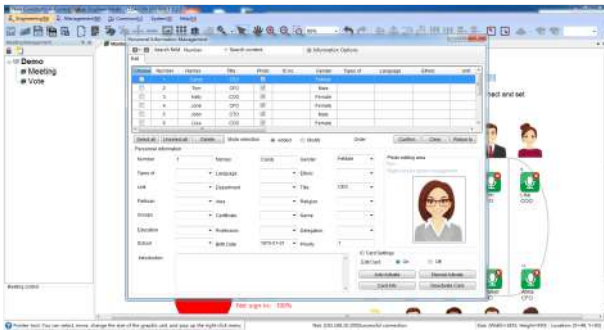

VIS-CLEACON IC

IC card management software module


- IC card control software module
- Applicable to physical IC card sign-in service or seat authentication
- Enter detailed personnel information and seating
- Read IC card information, report loss or clear IC card information
- Import and export of Excel documents can be realized

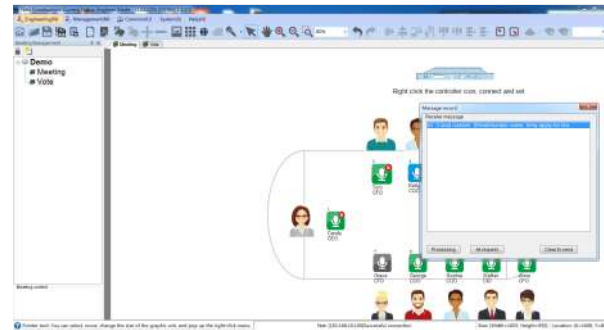

VIS-CLEACON SERVICE

Conference service software module



- Services software modules
- View participants' requests through the software or background
- Check the content of participants' requests in the background
- Pop-up notifications show attendees' requests, and quickly respond to user needs
- Import and export of Excel documents can be realized

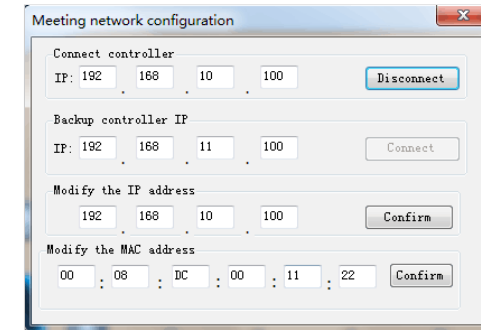

VIS-CLEACON BACKUP

Backup software module

- Controller backup setting software module
- Two controllers can be used in series and set the master and slave machine
- By default the master works, and the slave unit stands by to monitor the system
- When the fault is detected, the slave unit seamlessly takes over the work

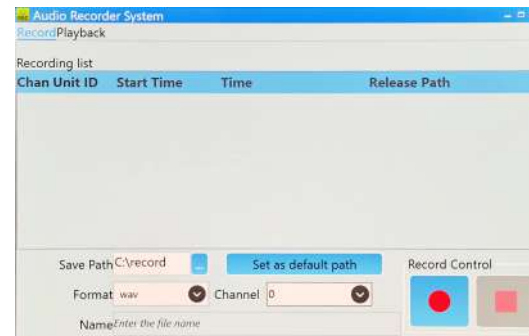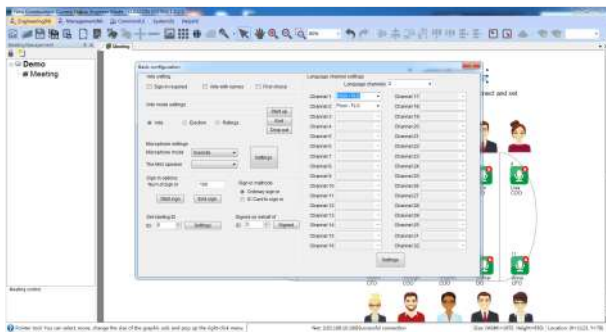

VIS-CLEACON INTERP

Interpretation software module

- Simultaneous interpretation channel management software module
- Simultaneous interpretation equipment sets up channels in batches
- The receiving language of the channel selector or receiver
- Set up and manage the interpreter equipment between interpreters
- All devices are under the control of the software to avoid user malfunction


VIS-CLEACON RECORD

Recording software module

- Channel recording management software module
- Differential integrated recording, single-channel recording is possible
- Can record 64 channels interpreter voice and 64 channels speech voice respectively
- All recorded audio can be saved with the highest sound quality and lossless sound quality
- The recording files can be managed, played back, and modified in the software

VIS-DMD

Software license

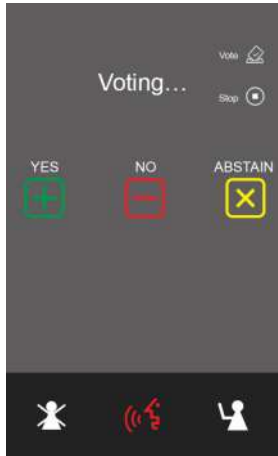

VIS-LVOTE

Vote software module


- Five voting or rating buttons
- Can realize 2, 3, 5 key voting or rating
- License suitable for touch screen unit



VIS-LIDEN

IC card software module


- NFC sign-in or identity authentication
- Physical encryption card authentication
- License suitable for touch screen unit

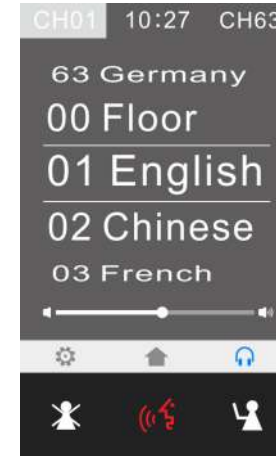

VIS-LLGE

interpretation software module

- Realize dual selectors in one unit
- 64 language channels can be selected in the selector
- Suitable for firmware upgrade function
- License suitable for touch screen unit

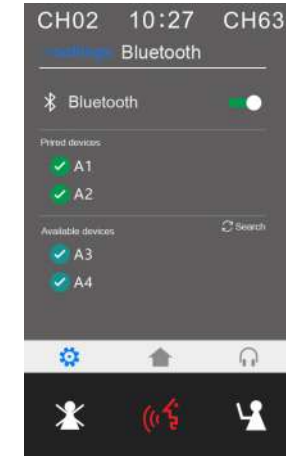

VIS-HLBLTH

Bluetooth software module

- Can be connected to hearing aids
- Turn on Bluetooth to connect to hearing aids in the settings
- License suitable for touch screen unit

Minimal connection, easy deployment

Only a single CAT5 cable is needed from the controller to the conference unit, and all deployment work can be completed by powering on. Even without software, it can realize "volume level, speech mode, EQ equalization, DSP, audio partition, noise control" and many other functions. "VISSONIC" understands the complicated steps of your on-site installation and debugging. Therefore, the equipment is ready to use when it is plugged in. High efficiency should be "Plug and play".

Compatible expansion


The rear of the controller is equipped with rich interfaces. The Phoenix connector provides multiple audio partition ports, which can realize multiple conference rooms share a conference controller to "maximize" the use of equipment hardware! The Audio Link port can connect to active speakers or sound columns, without additional audio cables and power supply and can achieve audio reinforcement and a variety of equipment connection.

Special features

Front: curved glass panel, equipped with high-fidelity dual speakers for conferences on the top.

Side: equipped with 3.5mm headphone jack, which can adjust the volume of headphones and speakers.

Back: Dual CAT5e interfaces provide double protection for power supply.

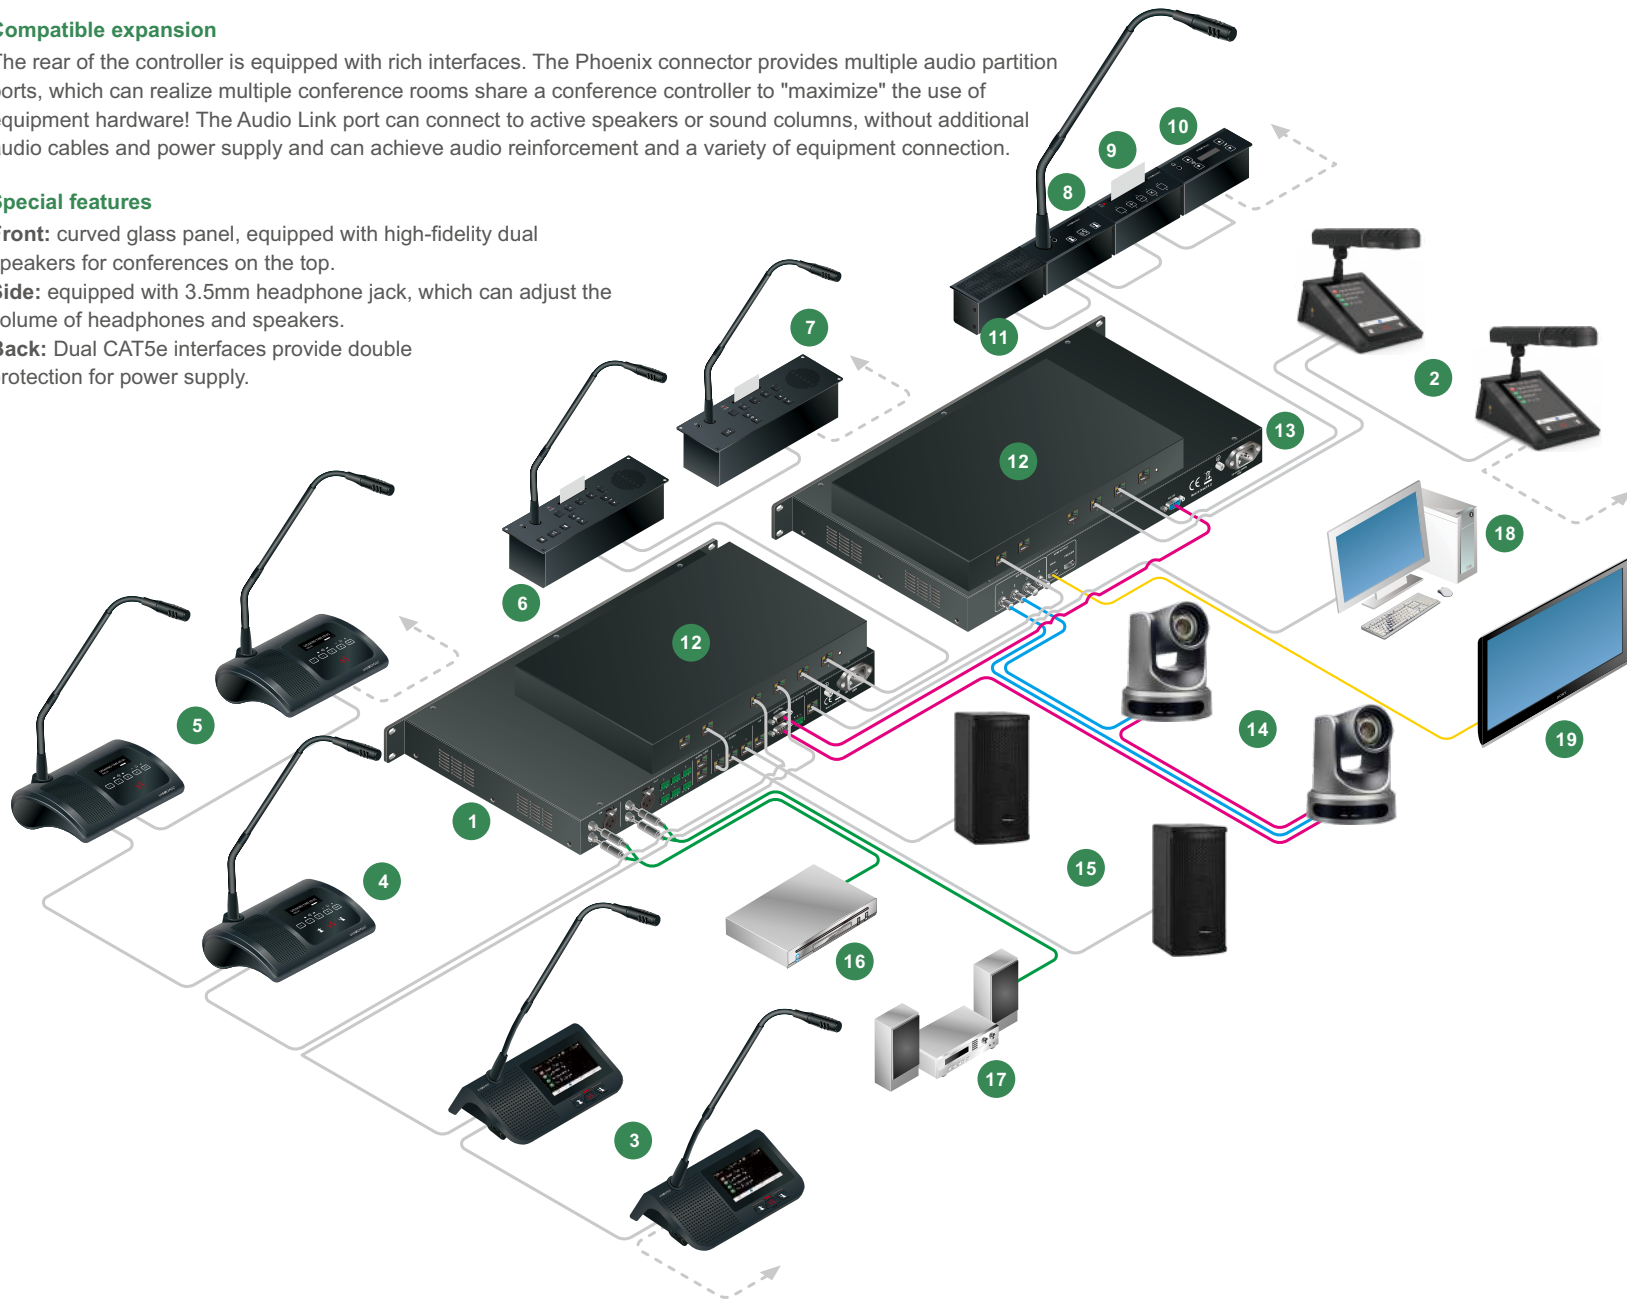

- 1 VIS-DCP2000-D Full digital networked DSP conference processor
- 2 VIS-DMD-T Digital conference touch screen unit
- 3 VIS-MAU-T 5G touch screen unit
- 4 VIS-DVC-T Cat5 wired digital voting chairman unit
- 5 VIS-DVD-T Cat5 wired digital voting delegate unit
- 6 VIS-FFD-F1 Flush-mount all-in-one discussion chairman unit
- 7 VIS-FFD-F1 Flush-mount all-in-one discussion delegate unit
- 8 VIS-DCC-F Digital flush-mount discussion chairman unit
- 9 VIS-DVU-FS1 Digital voting with IC-card unit
- 10 VIS-CSU-F Digital flush-mount 64 channel selector
- 11 VIS-SPK-F Flush-mount speaker unit
- 12 VIS-EXM Extension main unit
- 13 VIS-CATC-A Camera auto-tracking controller
- 14 VIS-CDC Full HD camera
- 15 VIS-SPK SERIES POE comunn speaker
- 16 DVD
- 17 Power amplifier
- 18 PC
- 19 HD display

- CAT5e
- HDMI
- SDI
- RS-232
- Audio

6 discussion modes used for various conference demands



A-4

Full digital classic conference system

Based on full-digital network technology, CLASSIC-D is designed with light conference, fast and simple start and classic appearance design requirements.

The conference system makes full use of the advantages of all-digital network system and fully simplifies the functions of the system, making it easy for customers to operate and use, so as to meet the requirements of most customers for the conference system and fully consider the economy and practicability of the system.

Named after CLASSIC-D system series, it gives this unit a perfect market position.

Diversified, more free installation

The "CLASSIC-D classic conference system". It has a variety of installation methods and deployments. The "inclined triangle" base structure allows it can be flush mount installation and desktop place!

"Light conference" can also fulfill multiple conference scenarios. Only two buttons can realize multiple speech modes such as "first in, first out, application for speech, timed speech, free speech, and voice-activated speech".

"Volume knob" can adjust the earphone and speaker volume of each conference unit, and the built-in high-fidelity speaker can realize independent sound reinforcement.

Connection stabilization technology

The highest connection guarantee technology for the current conference, supports three connection modes: hand-in-hand loop, star, and hybrid. To provide users with data and power supply guarantee. Any unit failure will not affect the normal operation of other devices.

Audio Link simplify the installation

The use of Audio Link audio protocol can allow unlimited expansion of conference equipment and can add devices with the same protocol and merge them into a system for "unified management". The equipment can be microphones, speakers, audio processors, central control, or even analog audio device to work compatibly.





Government



Enterprise

Application scenario



Первое заседание Совета депутатов
городского округа Солнечногорск
Московской области

Команда Солнечногорья

МИТРИШИН
Сергей Анатольевич

ВЕРЕМЕЕНКО
Марина Александровна

КОМАНОВ
Александр Валентинович

ВАСИЛЕНКО
Сергей Владимирович

МИХАЙЛОВ
Александр Сергеевич

МИХАЙЛОВ
Сергей Владимирович



Simple meeting with high quality

Triangle design, diverse installations, more stable
Hand-in-hand loop connection is more reliable



VIS-DCP1000

Full digital networked conference processor

- Audio Link technology, full digital signal transmission and processing
- A CAT5e network cable transmits 64 channels of audio and various information
- The conference unit can be expanded to 5200 with extension
- Hot plug and play, dual controller backup
- Multiple interfaces support external audio signal
- USB recording and monitoring, meeting camera tracking function
- 8-segment balanced EQ, hand-in-hand loop network connection

VIS-DEC-T/VIS-DED-T

Cat5 digital wired discussionunit

- Independent microphone EQ balance adjustment
- Touch-type speech button, no noise when the microphone is switched on/off
- Hand-in-hand loop structure, unit failure does not affect other units
- Pluggable microphone, built-in high-fidelity speakers
- Hidden wiring at the bottom
- Lossless technology 48K audio sampling, 20Hz~20KHz response frequency
- Chairman unit can approve or reject speech request

VIS-DOC-T/VIS-DOD-T

Cat5 digital wired discussionunit (physical button)

- Dual installation mode, support desktop and flush mount
- Physical speech button, no noise when the microphone is switched on/off
- Hand-in-hand loop structure, unit failure does not affect other units
- Pluggable microphone, built-in high-fidelity speaker
- Hidden wiring at the bottom
- Lossless technology 48K audio sampling, 20Hz~0KHz response frequency
- Chairman unit can approve or reject speech request

Minimal connection, easy deployment

Only a single CAT5 cable is needed from the controller to the conference unit, and all deployment work can be completed by powering on. Even without software, it can realize "volume level, speech mode, EQ equalization, DSP, audio partition, noise control" and many other functions. "VISSONIC" understands the complicated steps of your on-site installation and debugging. Therefore, the equipment is ready to use when it is plugged in. High efficiency should be "Plug and play".

Compatible expansion

The rear of the controller is equipped with rich interfaces. The Phoenix connector provides multiple audio partition ports, which can realize multiple conference rooms share a conference controller to "maximize" the use of equipment hardware! The Audio Link port can connect to active speakers or sound columns, without additional audio cables and power supply and can achieve audio reinforcement and a variety of equipment connection.


Extraordinary experience Start by choosing "CLASSIC-D Classic Conference System".

Special features

Front: glass panel, equipped with high-fidelity dual speakers.

Side: equipped with 3.5mm headphone jack, which can adjust the volume of headphones.

Back: Dual CAT5e interfaces provide double protection for power supply.

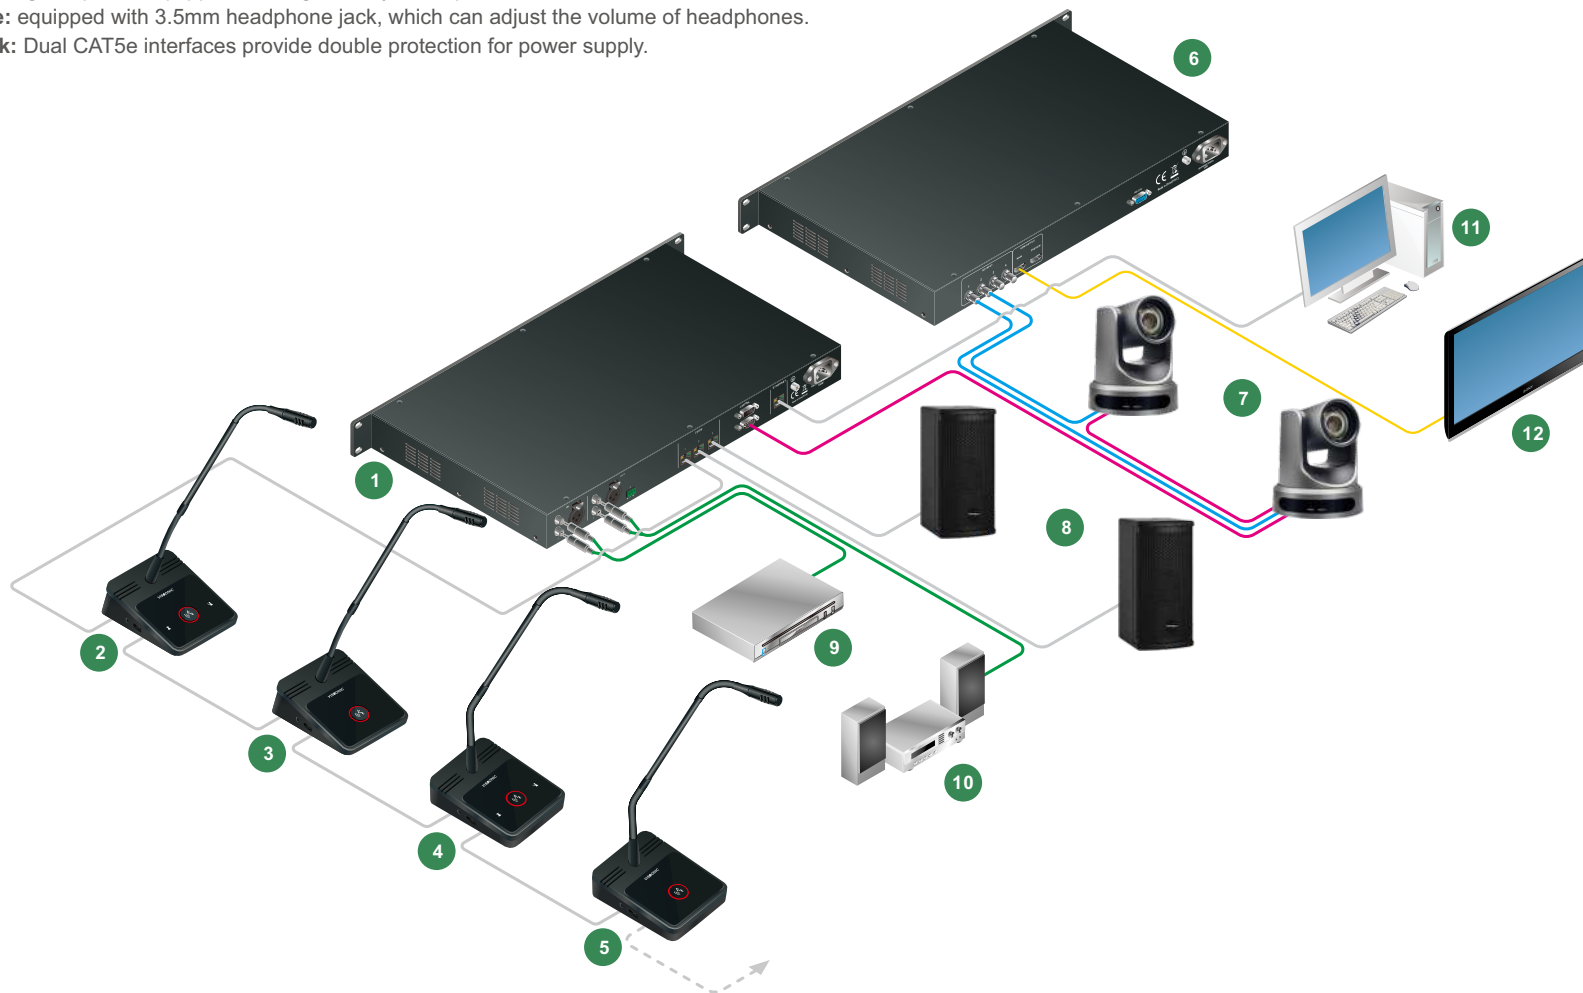

- 1 VIS-DCP1000 Full digital networked conference processor
- 2 VIS-DOC-T Cat5 wired digital basic discussion chairman unit
- 3 VIS-DOD-T Cat5 wired digital basic discussion delegate unit
- 4 VIS-DED-T Cat5 wired digital basic discussion chairman unit
- 5 VIS-DED-T Cat5 wired digital basic discussion delegate unit
- 6 VIS-CATC-A Camera auto-tracking controller
- 7 VIS-CDC Full HD camera
- 8 VIS-SPK SERIES POE comumn speaker
- 9 DVD
- 10 Power amplifier
- 11 PC
- 12 HD display

- CAT5e
- HDMI
- SDI
- RS-232
- Audio

Assist participants understand the content in multilingual meetings



A-5

Digital IR language distribution system

It is a unique advantage of the "infrared IR digital language distribution system" that can be mobile and freely listened on the spot.

The signal coverage is wide, which can effectively cover a 76-meter radius of $180^{\circ} \pm 25^{\circ}$, and is not affected by the interference of light and electromagnetic signals. The system supports simultaneous interpretation of up to 63+1 language channels.

Infrared transmission is widely used in the military field, with "low delay, fast response, anti-interference" and other characteristics, the cutting-edge technology has been applied to the VISSONIC infrared IR digital language distribution system.

Fast response

Thanks to the digital network transmission, the speed of simultaneous interpretation has been increased as never before. When the user is speaking, the interpreter machine can receive the content of the user's speech within 3ms. During this period, translators can perform simultaneous translations. Participants will receive the translated content simultaneously, and communication will be shortened with low latency, so that users are always in a state of communication, bringing a better participation experience! Switching the language channel also responds quickly.

Optical transmission, high sound quality

The system adopts DQPSK digital modulation/demodulation technology and IEC 61603-7-2003 digital transmission standard to create high-quality infrared encryption and decoding. Compared with other simultaneous interpretation equipment, it can obtain faster voice transmission and language translation transmission!





Government



Enterprise

Application scenario





Easy translation, international communication

High security technology, wider coverage and anti-interference
Faster response speed and no delay in translation



VIS-VLI700A-4/8/16

Digital infrared transmitter

- Compliance with IEC 61603-7 and IEC 60914
- Compliance with the latest national standard GB 50524-2010
- Compatible with third-party IEC 61603-7 infrared simultaneous interpretation system
- Support DQPSK digital modulation and demodulation technology
- A single controller can be assigned 4, 8 or 16 audio channels
- The display and indicator can view the system and radiation panel status
- Can be elimination of high-frequency lighting system interference

VIS-VLI703A-4/8/16/32

Digital infrared receivers

- Compliance with IEC 61603-7 and IEC 60914
- Compatible with third-party IEC 61603-7 infrared simultaneous interpretation system
- Intelligent power saving can turn off automatically if the headphone is not connected for 5mins
- Ultra-wide 270° receiving signal angle, automatically muted when the signal is too low
- Up/down button to select channel, use rechargeable Li-battery or AA battery (optional)
- The LCD display can display channel, language name, battery, signal status

VIS-VLI701A

Digital infrared radiator

- The maximum radiation range can reach 76 meters
- Radiation range can reach 180° angle $\pm 25^\circ$
- Cable delay compensation automatically corrected by the system
- Half power/full power can be selected by the switch
- Hand-in-hand to connect more digital radiation panels
- Unaffected by light, it can be used in meeting rooms even during the day
- When the temperature is too high, can adjust automatically from full power to half power



VIS-INT64

64 channels interpreter desk

- Can realize direct/ relay translation
- Not limited the number of translation units and can plug and play
- Separately adjust the volume of the speaker and headphone
- Pluggable microphone design, equipped with dual headphone ports
- Designed with a metal shell to resist radio frequency signal interference
- Up to 64 language channels (including the original sound channel)
- All channels support 48kHz audio sampling, with frequency response of 30Hz to 20kHz



VIS-AD16

Analog audio extension controller

- 16-channel analog audio inputs
- 16-channel analog audio output
- Display the channel occupied LED indicator
- With earphone monitoring and VU meter monitoring
- Dante port is used to connect to Dante network (optional)
- With direction buttons, LCD display can select the monitoring channel and other settings
- Rs232, Ethernet interface can control input and output audio channels



VIS-TC50A

Charger and storage box for receiver

- Fast charging: within 2 hours
- Universal power supply can be used worldwide
- Can charge 50 receivers at the same time
- LED indicator shows the receiver's charging status
- Compatible with VIS-VLI703A series receivers
- The charging box can cascade and storage receivers



VIS-HPD

Headphone for Delegates

- To monitor conference mic sound
- Tightness adjustment, comfortable to wear
- Special acoustic optimization, recover the original audio



VIS-HPI

Headphone for Interpreter

- Headset with MIC input
- Tightness adjustment, comfortable to wear
- Special acoustic optimization, recover the original audio

Diverse interfaces, easy deployment

The radiation panel supports a ring hand-in-hand link to expand the signal coverage. The receiver's signal transmission and reception can be significantly improved when in a large area signal. It is equipped with a multi-protocol interface and can use Audio Link, Dante or the network for centralized management and control, monitoring the status of the equipment, use the central control RS232 to set the power, balance, language, speaking mode and other settings of the signal and the controller.

Compatible expansion


It is compatible with any other infrared simultaneous interpretation system that complies with IEC 61603-7. The user can use any VISSONIC device to expand, such as an flush mount conference unit or panel. In an international congress, you can choose to use the language distribution panel for rapid deployment, and arrange multiple language distribution panels by area, without missing any news.

Special features

Wearing: The unique design makes the receiver stable and not easy to fall off.

Carrying: The multi-function charging storage box can charge and store the receiver.

Use: More user-friendly design and interactive experience.

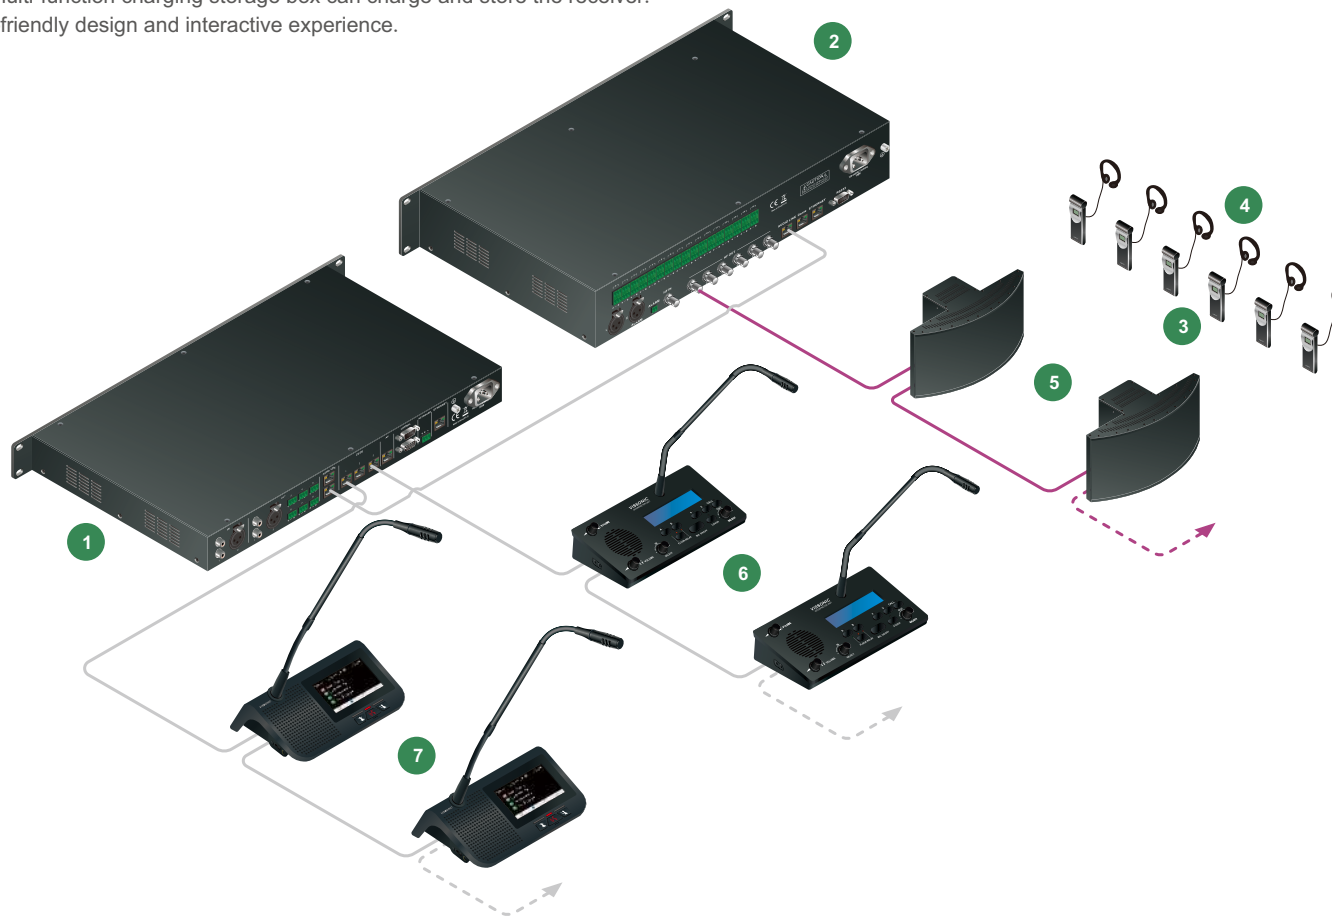

- 1 VIS-DCP2000-D Full digital networked DSP conference processor
- 2 VIS-VLI700A-4/8/16 Digital infrared transmitter
- 3 VIS-VLI703A-4/8/16/32 Digital infrared receivers
- 4 VIS-HPD Headphone for Delegates
- 5 VIS-VLI701A Digital infrared radiator
- 6 VIS-INT64 64 channels interpreter desk
- 7 VIS-MAU-T Digital touch screen unit

- CAT5e
- RG59

Efficient howling suppression improve sound reinforcement effect



A-6

AUDIO LINK™ network audio system

In the same network segment of the AUDIOLINK system, use single Cat5e cable to interconnect, communicate, and control devices can avoid the remaining waste of various types of cables.

It can really effectively improve user experience and reduce engineering time to solve chaotic situation in the past complicated and disorderly multimedia construction.

Fast and stable connection

Compared with other protocols, AUDIOLINK protocol has a unique advantage which can authenticate the device and automatically add it within 10ms. This means that the device can be restored in a very short time if it fails. Meanwhile, the protocol also supports "smart detection", which can classify equipment from multiple devices appear in the same system, to ensure the stable performance of the equipment.

Unique authentication technology

Encryption and anti-interference is very important in digital conferences. Its authentication methods include type authentication, identity recognition to authenticate unfamiliar devices. Non-conference protocols are prohibit joining and data transmission to ensure digital Information security and stability.

Single cable transmission technology

After breaking through numerous technical difficulties, we upgraded our protocol again based on the (IEEE 802.3 bt) communication protocol standard. Conference equipment with the same protocol can carry out gigabit transmission. In the case of extremely low latency, it also supports high-power transmission without interference. Reducing cables and power supply deployment and reducing costs.





Government



Enterprise

Application scenario



Digital transmission, conference-specific audio protocol

Scalable connection, unique authentication, more secure

Powered by POE++, faster deployment



VIS-AIB

Microphone interface box

- Two separate audio inputs
- Can be used as chairman or delegate unit
- Shielded metal enclosure for remote installation
- Two sets of Phoenix connector for buttons, microphones, earphones and speakers
- Can use power microphone, capacitor or dynamic type
- Two RJ45 ports, can connect the unit to controller, microphone or system unit
- Can be independently mount on the desktop, on the wall or flush-mount in the armrest of the desktop and seat

VIS-BDY-F

Flush mount boundary microphone

- Built-in RF filter
- Low profile pickup element, 360° pickup angle in all directions
- Flush mount installation base, support microphone to hide out of sight
- Rugged all-metal structure design, provided two layers of steel mesh cover for protection
- Anti-vibration insulating glue, effectively reducing the vibration noise on the installation surface
- DC 11V to 52V phantom power supply, 3-pin Canon male connector or 3.5 Phoenix connector output
- Multi-color LED status light, with pre-amplifier power supply, no external power supply module required

VIS-GSK-F

Flush mount microphone base

- Built-in RF filter
- 24-48V phantom power supply operation
- 3-pin Canon male connector or 3.5 Phoenix connector output
- Multi-color LED light ring
- Flush mount microphone socket, suitable for VIS-M full series gooseneck microphones
- Anti-vibration rubber isolation ring and metal fixing ring, effectively reduce the vibration noise on the installation surface
- Capacitance sensor touch switch



VIS-PTA-T

Analog array microphone unit

- Full aluminum alloy body with metal mesh cover
- ARRA-Tech™ array microphone technology
- Comes with a 2 meter cable to connect to the XLR connector
- Pickup distance is not less than 80cm, and the range is $\angle 160^\circ$
- Can be connected to a mixer or audio system or audio box
- Touch-type speech button, no noise is generated when the microphone is switched on and off
- The hidden adjustable gain knob can quickly set up the entire system according to the on-site spread spectrum environment



VIS-HM100

Handheld microphone

- Hand-held design, perfect fit and not easy to slip
- Low-noise condenser microphone core design, cardioid direction mode to reduce feedback
- Professional 6-pin XLR plug, which can be used for spiral or straight cable
- Color LED luminous ring
- The switch can turn on or off the microphone, and the unit can be added to the request to speak
- The mechanical parts are isolated from the acoustics to prevent the microphone from picking up the mechanical noise of the table



VIS-CIB

Full digital interface box

- Analog-to-digital converter, which can be installed hidden
- Hand-in-hand structure, unit failure does not affect normal work
- AGC , AFC , ANC technology
- Built-in speech mode of the controller can be activated, such as timed speech or voice activation
- Can perform function setting and device switching through connecting controller



VIS-DSP4/8/12/16

Digital DSP audio matrix

- 8-ch programmable GPIO control interface
- 16-ch DANTE module, 16-channel digital audio input/output
- 100 sets of scene preset functions
- USB recording and broadcasting functions
- Ethernet control interface can control single and multiple devices
- Built-in DSP processing and camera tracking, support mixing and automatic mixing, and mixing component control functions
- Graphical software control interface

VIS-FS100



VIS-FS100-A

VIS-FS100-A/FS100

Automatic feedback suppressor

- Fully automatic high-speed howling suppression algorithm
- Automatically eliminate feedback, up to 12DB additional gain
- With AUDIOLINK digital cascade input and output interface
- Auto adapt to the acoustic environment, plug and play
- Each channel supports independent gain adjustment
- Balanced line or microphone input, microphone inputs provide phantom power
- One key definition of pink noise



VIS-SPK2/4/6/8/12-AL

POE column speaker

- High-grade wooden cavity, sturdy and durable metal mesh cover
- 1 RJ45 AUDIOLINK interface
- Digital transmission, ultra-low delay
- A network cable can transmit audio, control signals, POE power supply
- Built-in micro-electricity detection provides over-current protection, and overload protection
- Built-in DSP processing, support gain, mute, equalization, pressure limit, noise gate software adjustment
- No external power supply is required

Strong Compatibility

VIS-CIB and VIS-AIB digital audio boxes can expand the existing old equipment, which is very useful for users to upgrade the conference equipment. Some old conference equipment cannot be disassembled or can not meet the current meeting needs. "Conversion" allows the device to join in the meeting through AUDIOLINK protocol, and can upgrade the old conference equipment without modifying the conference table layout.

Rapid deployment


The conference management software can manage all AUDIOLINK devices. We are well aware of the wiring problems encountered at the deployment site. Now we only need to connect the equipment to perform online inspections in the management software. The software can detect the online status, offline status, and conflicts of the equipment, and guide users to troubleshoot faults in the form of icons or numbers, speed up project construction and deployment.

Special function

Professional: audio supports debugging, mode, reverberation, EQ equalization, and partition management.

Management: deploy and debug through Ipad or conference software

Interface: built-in diversified universal interface to facilitate the construction and deployment.

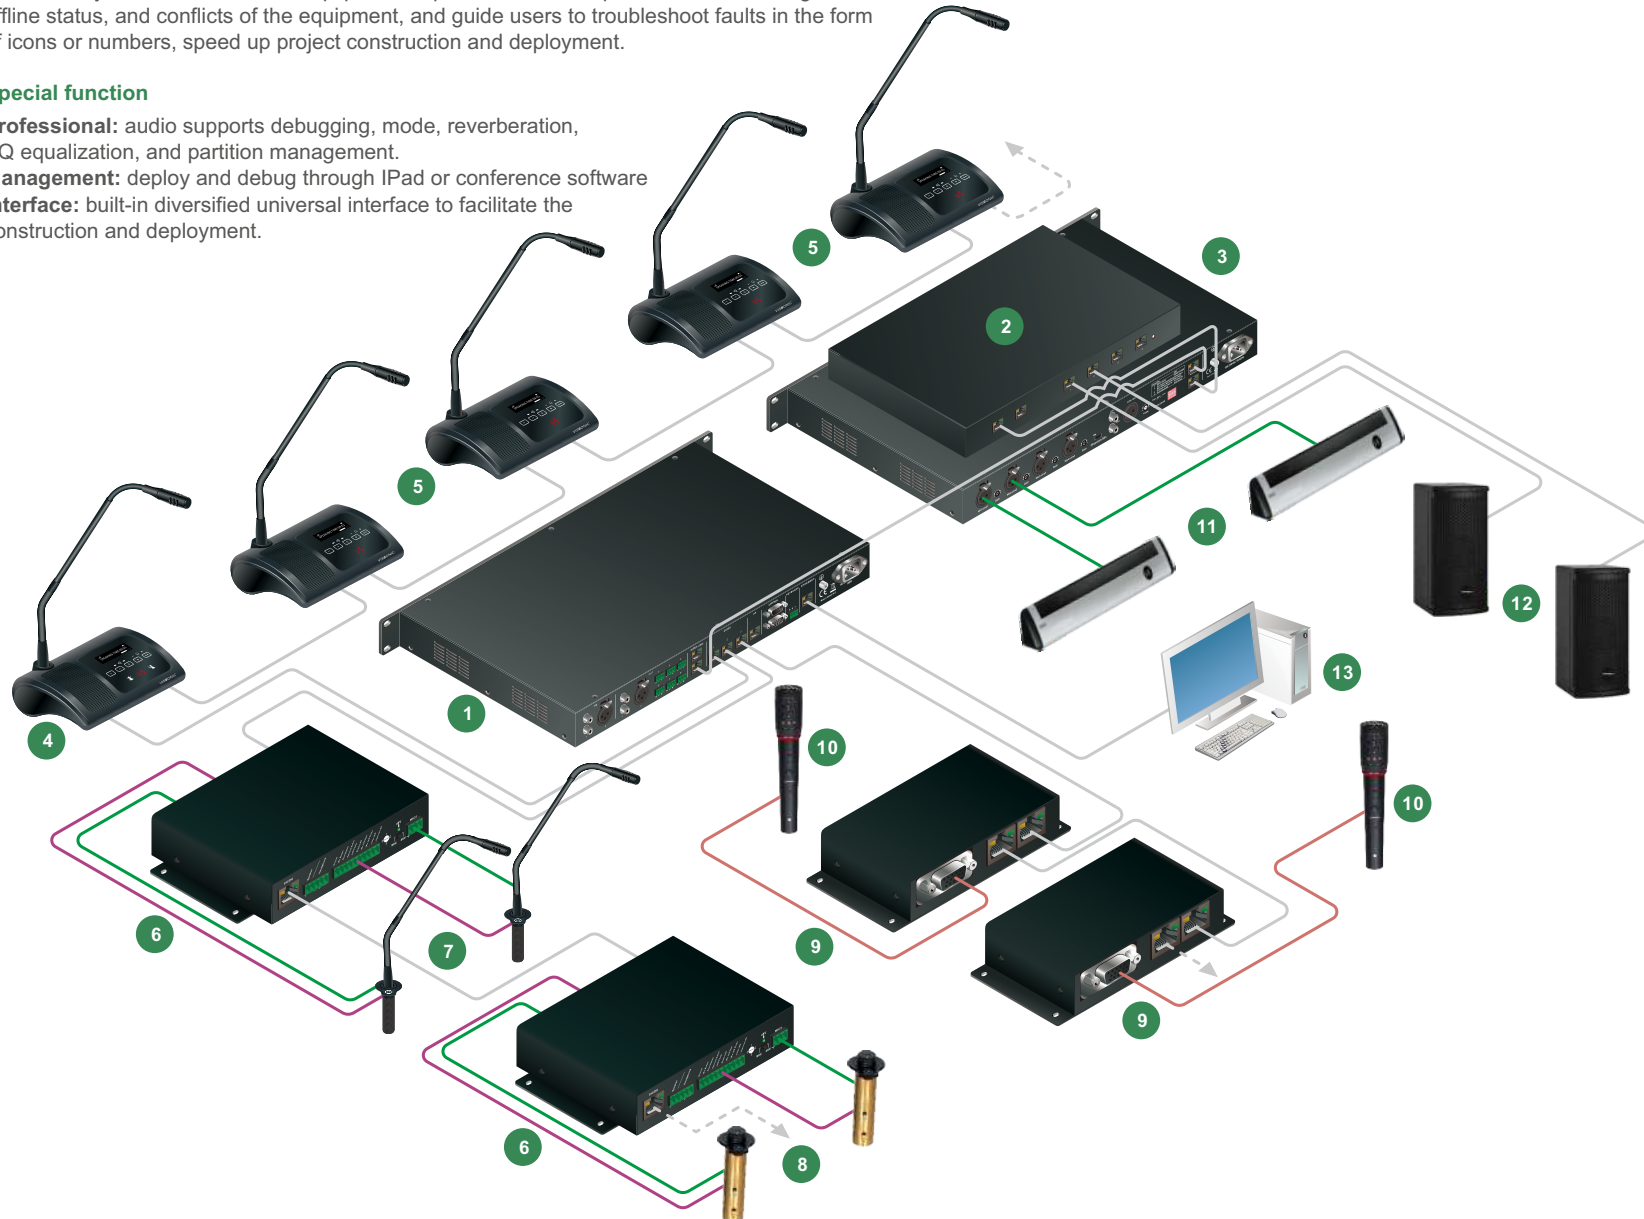

- 1 VIS-DCP2000-D Full digital networked DSP conference processor
- 2 VIS-EXM Extension main unit
- 3 VIS-FS100-A Automatic feedback suppressor
- 4 VIS-DVC-T Wired discussion vote chairman unit
- 5 VIS-DVD-T Wired discussion vote delegate unit
- 6 VIS-AIB Microphone interface box
- 7 VIS-GSK-F Flush mount microphone base
- 8 VIS-BDY-F Flush mount boundary microphone
- 9 VIS-CIB Full digital interface box
- 10 VIS-HM100 Handhele microphone
- 11 VIS-PTA-T Analog array microphone unit
- 12 VIS-SPK SERIES POE column speaker
- 13 PC

- CAT5e
- VGA
- XLR
- Audio

Large wide angle camera meet the needs of multiple conference scenarios



A-7

Camera auto tracking and recorder

In the past, we need professional photographer to do video recording for the meeting. Now we recommend trying our "Auto Camera Tracking and Recorder", which has powerful preset positions and intelligent tracking algorithms.

It can record or capture participants or teachers in a preset area. When the user presses the speech button, the camera can auto track and switch smoothly, and record the whole speech.

The auto camera tracking system is dedicated to the efficient processing of meeting records and classroom records.

Cloud conference, clear transmission

Traditional cameras always use fixed lenses when conducting remote meetings, lacking in interactivity. At the same time, there are still phenomena such as unclear image quality. VISSONIC provides camera based on technology research to support H.265/264 Multi-threaded compression.

It is easier to the transmission of remote meetings, and the sound is clear. The camera tracking function can be enabled for close-up capture during the remote meeting, making the meeting communication more interactive!

Robust algorithm, tracking without loss

In addition to the fixed preset mode, the software also provides user-defined area settings. The tracking area and non-tracking area can be divided through the software. It is very important for lectures, and classroom modes.

High-quality lens, perfect image

Using Panasonic high-quality CMOS, the lens supports up to "32x" optical zoom, the highest resolution can reach 4K. the lens uses a special distortion-free viewing angle processing. It solves the phenomenon that the edge of the close-up picture is stretched, and supports 2D and 3D digital noise reduction.

It is equipped with a 356-degree camera pan/tilt and 255 camera presets to adapt to various angles of recording.





Government



Enterprise
&
Education

Application scenario



Clear records, best image of the meeting

Optical zoom, fast capture and clear image
Intelligent algorithm, stable tracking



VIS-CRS02/03/05

Professional audio/video recorder

- Common protocol or AUDIOLINK protocol
- Tracking with participants by preset position
- Preview and playback the video in PC
- Output image or output guide control interface from HDMI and web page
- Built-in 1TB high-speed hard disk, you can choose to overwrite or pause when the storage is full
- Generating video files, FTP management, USB download, live broadcast and on-demand
- 5 HDMI inputs support 4K@30Hz input to record, 2 HDMI loop out

VIS-CATC-A

Camera auto-tracking controller(SDI)

- Seamless switching and multi-camera switching
- Realize camera tracking by serial port or TCP/IP
- 4 channels SDI input, input with long-distance equalization function
- Adjustable output resolution, up to 1080P@60Hz resolution
- HDMI1+1 output, SDI input supports 100m transmission with 75Ω coaxial cable
- With adjustable screen freeze

VIS-CATC-B

Camera auto-tracking controller(USB)

- Seamless switching and multi-camera switching
- Realize camera tracking by serial port or TCP/IP
- Can be used locally and shared via PC software such as (ZOOM, Teams)
- Support 2 HDMI and 4 SDI input
- Adjustable output resolution, up to 1080P@60Hz resolution
- HDMI1+1 output, 1x USB output video to PC
- With adjustable screen freeze



VIS-CDC-S/30-S/U

Full HD camera

- Up to 1080P image
- 20x/30x optical zoom with Panasonic's CMOS
- USB can be used for local recording and wired storage
- AAC audio encoding, the highest output can reach 60Fps
- Preset 255 positions, support automatic or manual operation
- 232/485 serial port control or tracking control of AUDIOLINK protocol
- Built-in SDI interface supports long-distance transmission, equipped with HDMI and network ports



VIS-CDC-4K

UHD camera

- Up to 4K image
- 20x/30x optical zoom with Panasonic's CMOS
- USB can be used for local recording and wired storage
- AAC audio encoding, the highest output can reach 60Fps
- Preset 255 positions, support automatic or manual operation
- 232/485 serial port control or tracking control of AUDIOLINK protocol
- Built-in SDI interface supports long-distance transmission, equipped with HDMI and network ports



VIS-TCAMH

Auto-tracking camera

- Up to 1080P/60fps recording
- 32x digital zoom high-quality CMOS sensor
- The lens has the characteristics of 72.5° no distortion
- Dedicated to online and offline education
- USB can be used for local recording and wired storage
- Close-up capture based on image recognition and data tracking algorithms
- The tracking area of the camera can be divided through the network



VIS-CKB1

Precision Camera Controller

- Full metal body, efficient keyboard layout design
- Joystick is accurate for movement
- Common protocol or AUDIOLINK protocol
- LCD display for menu settings
- Support PELCO-D, PELCO-P, VISCA protocol

Compatible with 3rd parties

VISSONIC conference system supports PELCO-D, PELCO-P, and VISCA protocols. The user only needs to connect the camera to conference controller to set the preset position. it can use with Windows , iOS , and Android system to preview and set in the recording screen with web interface.

Function extension


Not limited to meeting or class recording, RTMP and RTSP protocol can be used to push the stream for live broadcast, it can encrypt and verify the live broadcast. By simple settings, No less than 200 people can watch the real-time streaming screen.

Special features

AFC: Feedback suppression-the microphone won't easily cause the feedback with best sensitivity.

AEC: Echo cancellation-adaptive filtering and zero delay processing make the echo disappear.

ANC: Noise Cancellation-Automatically identify the opposite noise emission and realize the cancellation.

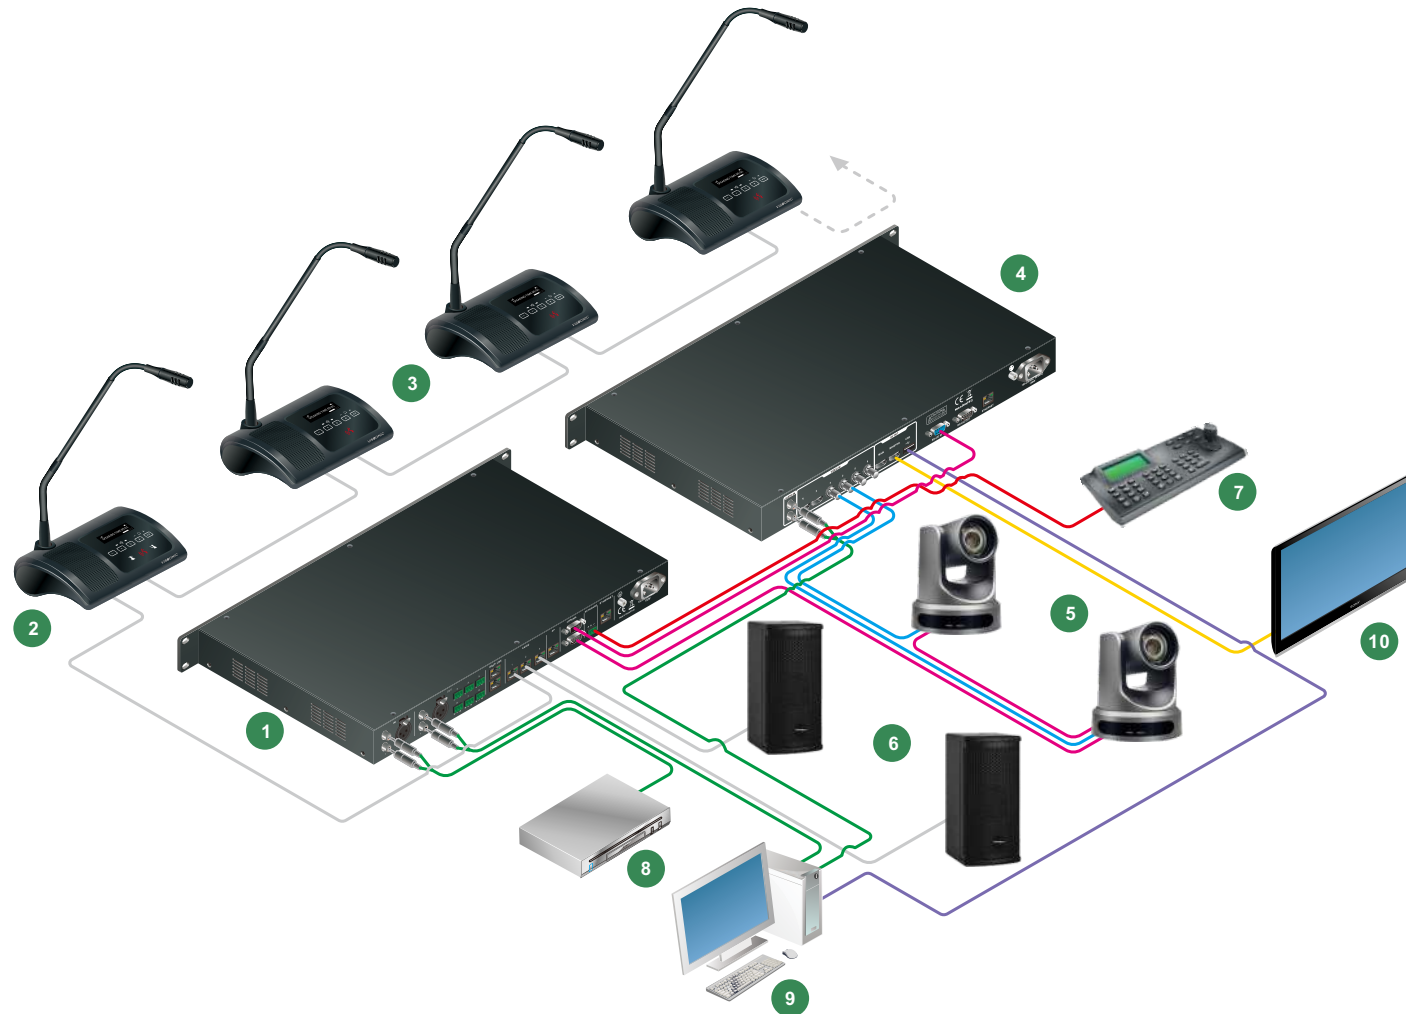

- 1 VIS-DCP2000-D Full digital networked DSP conference processor
- 2 VIS-DVC-T Wired discussion vote chairman unit
- 3 VIS-DVD-T Wired discussion vote delegate unit
- 4 VIS-CATC-B Camera auto-tracking controller
- 5 VIS-CDC Full HD camera
- 6 VIS-SPK SERIES POE column speaker
- 7 VIS-CKB1 Precision Camera Controller
- 8 DVD
- 9 PC
- 10 HD display

- CAT5e
- HDMI
- SDI
- USB
- RS-232
- Keyboard
- Audio

A-8 Accessories



- Digital and analog audio output
- All-metal design, matte surface texture
- Cardioid direction, adjustable moving angle

VIS-MDA
Square-type dual capsule mic



- Array type dual capsule design, wide sound pickup
- All-metal design, matte surface texture
- Cardioid direction, adjustable moving angle

VIS-MDM
Square-type mic



- 220mm flexible adjustable gooseneck
- Two-color LED status indicator
- Anti-wind microphone foam cover

VIS-M220
220mm Gooseneck mic



- 330mm dual flexible sections on gooseneck
- Two-color LED status indicator
- Anti-wind microphone foam cover

VIS-M330
330mm flexible gooseneck mic



- 410mm dual flexible sections on gooseneck
- Two-color LED status indicator
- Anti-wind microphone foam cover

VIS-M410
410mm flexible gooseneck mic




- 410mm dual flexible sections on gooseneck
- XLR port
- Two-color LED status indicator
- Anti-wind microphone foam cover

VIS-M410-R
410mm flexible gooseneck mic



- 485mm dual flexible sections on gooseneck
- Two-color LED status indicator
- Anti-wind microphone foam cover

VIS-M485
485mm flexible gooseneck mic



- 600mm dual flexible sections on gooseneck
- Two-color LED status indicator
- Anti-wind microphone foam cover

VIS-M600
600mm flexible gooseneck mic

A-8 Accessories



- Shield electromagnetic interference
- Prevent conference signal attenuation
- Metal connection interfaces in both side

VIS-LD10/20/30/50/100
Coaxial RG59 cable



- High-strength flexible cable
- Two RJ45 shielded male connectors can reduce electromagnetic interference
- Extension cable for controller to CU/DU unit

VIS-HL002/003/005/10/20/50/100
CAT5 cable



- Connect to the conference management software
- Read and write information to IC card
- Encrypted information such as personnel name, seat number, etc

VIS-CARDWR
IC card writer



- ISO/IEC 14443A/MIFARE
- Compatible with access control system
- Used for conference sign-in and identity authentication

VIS-ICCARD
Contactless IC card



- Specific lithium battery for receiver
- Can be charged in the receiver
- The capacity is 1600mAh, working voltage is 3.7V

VIS-BTPS
Rechargeable battery pack



- External touch control panel
- Can be used for analog to digital audio box
- Provide communication for 2PIN and 3PIN Phoenix connector

VIS-BAIB
Switch button



- External touch control panel
- Can be used for XLR connector for audio output
- Provide Phoenix connector to connect to audio processor control

VIS-BDSP
Switch button



- Bracket for loudspeakers
- Adjustable vertical and horizontal angle
- High-quality metal structure can carry heavy equipment

VIS-SPKBR
Accessories

**Respond quickly
switching control is simple**



B-1

M5 modular seamless matrix switcher

The M5 Series is a seamless hybrid matrix switcher with modular design.

It supports seamless switching up to 4k@60Hz, with a wide product range of up to 144x input and 144x output. It is designed for mission-critical situations that work 24/7.

It has high reliability and is widely used in conference rooms, command centers, security monitoring, exhibition displays, military command, education and research, government announcements, commercial displays and other industries.

Visualization control

The configuration of the preview card can realize the video preview and switching on the PC and tablet, and supports real-time monitoring of the contents of the large screen.

Multi-terminal visualization operation

The visual preview of the signal, support on any system, any PC/mobile phone/tablet, realize visualization, movable, touch management, multiple operation terminals can be simultaneously controlled and status synchronized.

seamless switching 4K@60 UHD signals

Single channel maximum resolution up to 4Kx2K@60Hz, support 4K input collection, 4K seamless output, backward compatible with all standard resolutions, and support customized resolution.

Support splicing function

Splicing output supports single layer arbitrary zooming, superimposing, cross-screening, and roaming. A single signal can be spliced and displayed on any M×N display unit.

With rolling subtitles

Superimpose pictures at any position of each input signal or customize text in any language or font size, which can be set as a rolling analog LED banner.





Transportation center
&
Large display



Command center
&
Control Room

Application scenario



M5

VW-VL0808/1616/3636/7272/144144

modular seamless matrix switcher

- Flexible configuration for different cards
- Modular card design, hot-swappable
- Full digital seamless switching technology, full frame rate graphics processing algorithm
- Audio can embed in video or digital audio de-embedding as analog audio
- The front display can show the switching status and configure the IP address
- OSD text overlay function for subtitles and messaging
- FPGA hardware architecture can work immediately after power-on, boot-up time is less than 2 seconds



VW-VL0808



VW-VL1616



VW-VL3636




VW-VL7272



VW-VL144144

VIS-M5SOFT Control software

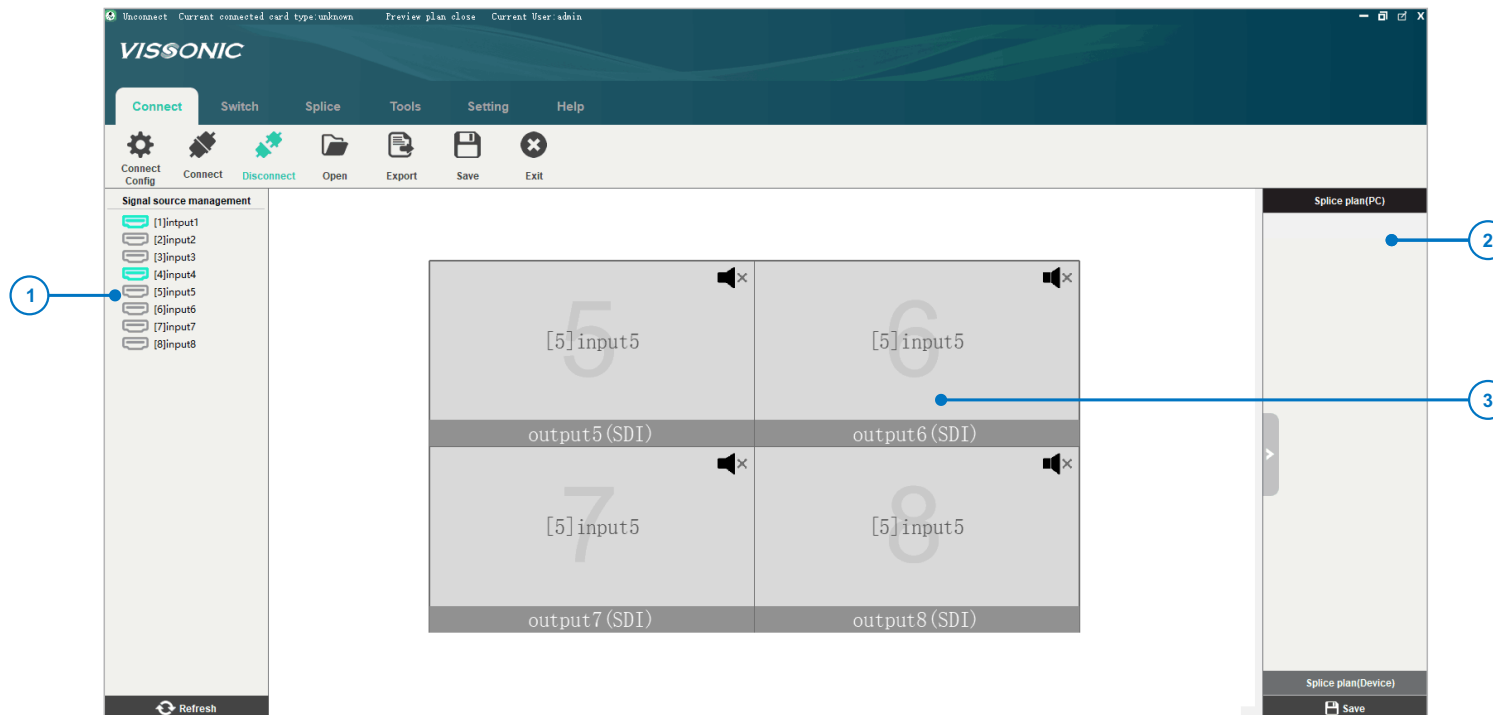

- User interface supports drag-and-drop operation
- The video wall configuration can set for multi-channel tour display
- Preview card can preview the video wall
- Monitor board information such as temperature or fan speed
- The software controls the OSD menu, logo and banner settings of the input signal
- User authority management

Rich interfaces and easy deployment

Now there is no need to worry about which interface should be used for the video signal source and screen of the venue. Both short-distance and long-distance transmission are equipped with corresponding boards and provide maximum customized interface support.

Compatible expansion


It adopts B/S architecture, supports Android, iOS, Windows systems and does not need to install software and plug-ins. The use of IP boards can also support network monitoring access, support web login to set network protocols, onvif, RTP, RTSP, RTCP, TCP, UDP and other network protocols.

Featured functions

Management: Visualized operation management of professional signal source, multi-channel one-to-N input and output switching

Operation: Equipped with LCD display and buttons, it can still switch accurately in dimly lit environment

Compatible: All platforms are compatible and do not need to install any software

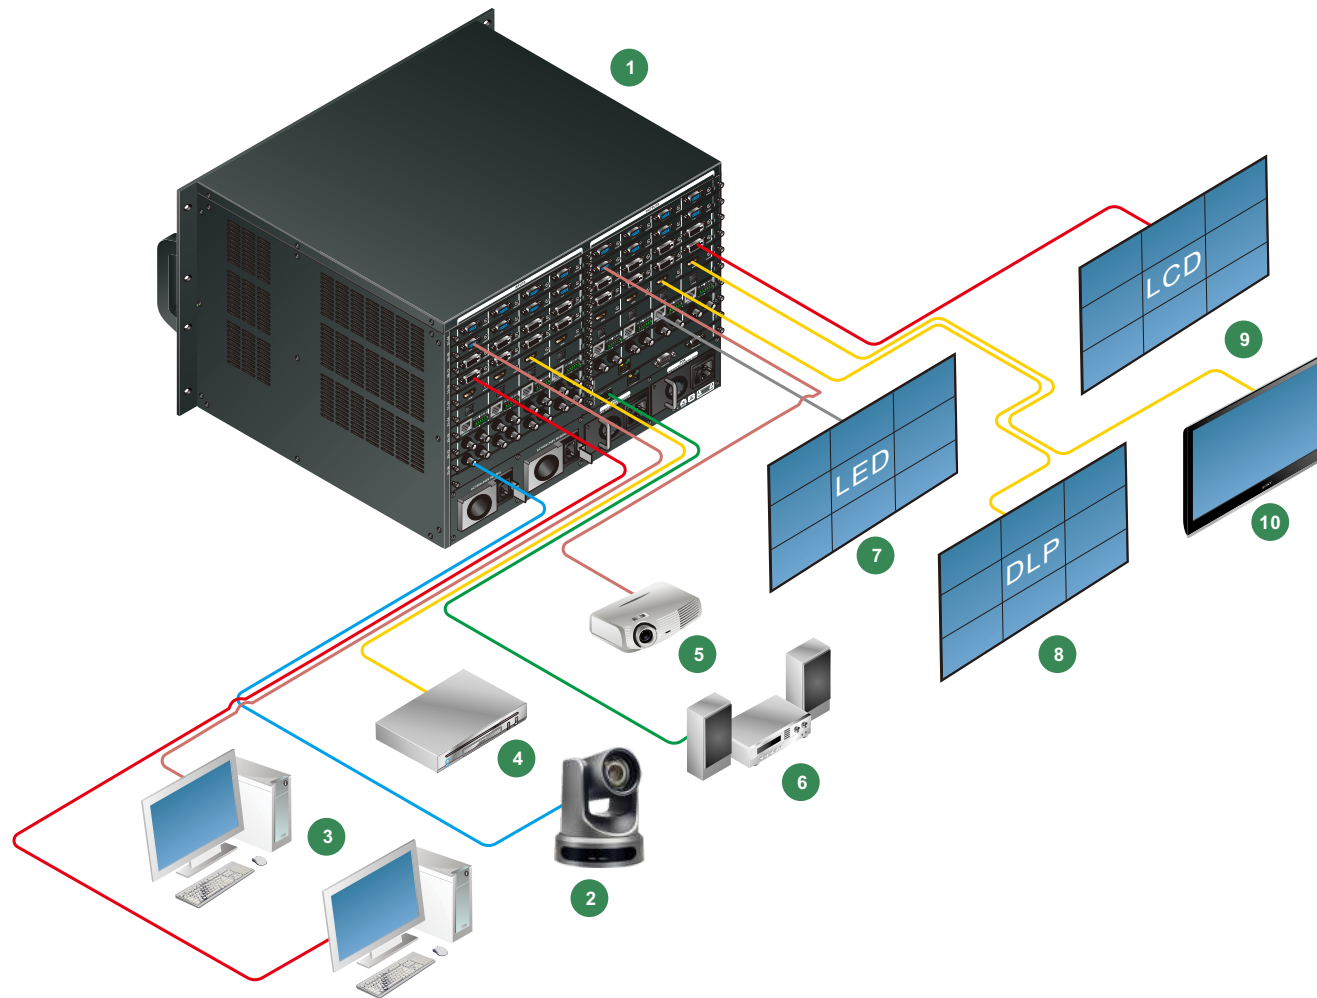

- 1 VIS-VL3636 modular seamless matrix switcher
- 2 VIS-CDC Full HD camera
- 3 PC
- 4 DVD
- 5 Projector
- 6 Power amplifier
- 7 LED
- 8 DLP
- 9 LCD
- 10 4K HD display

- CAT5e
- HDMI
- SDI
- DVI
- VGA
- Audio

Provide all-in-one solution for multiple video switching processing



B-2

X9 series seamless modular switcher

X9 series Seamless Modular Switcher is a flexible splicing and seamless matrix, the number of channels from 8x8 to 144x144.

This series of matrix adopts high-performance hardware design, perfectly supports various high-definition digital / analog signal switching processing, and has bidirectional RS-232 and bidirectional IR signal switching functions. It can also divide a complete image signal into multiple signals and distribute it to multiple display units. At the same time, it forms a large display screen to display dynamic pictures. It also supports LCD / LED / DLP video walls, 4K large displays and other devices.

Powerful performance

X9 series Seamless Switching Video Wall Processor Provide one-stop solution for multiple video formats and control signal distribution switching processes in various industries, which can be widely used in broadcast and television projects, multimedia conference halls, large-screen display projects, TV teaching, intelligent traffic management centers, command and control centers, etc.

The "dual backup power supply" on the back prevents black screen caused by power failure and solves emergencies!

4K splicing and switching

Adopting unique frame synchronization technology to ensure that all the output images are synchronized completely, the picture is smooth and complete, makes the image more precise on each frame.

supervise and alarm

Monitor each video module, such as fan speed, temperature, manufacturing information, version, etc., can actively trigger alarm.

Access the preview card to preview and edit the screen in the background, can confirm that the display plan is correct, and then seamlessly push to the customer display area.






Transportation center
&
Large display




Command center
&
Control Room

Application scenario





Videowall



Multi-window





Image roam



Free size



Signal switch

VW-VM0808/1616/3636/7272/144144

Modular seamless switching video wall processor

- Flexible configuration for different cards
- LCD display and illuminated buttons
- Full digital seamless switching technology, full frame rate graphics processing algorithm
- Audio can embed in video or digital audio de-embedding as analog audio
- It can monitor the status of all display boards
- With video real-time monitor to show the current video image
- Multiple video wall groups can be managed at the same time



VW-VM0808




VW-VM1616



VW-VM3636




VW-VM7272

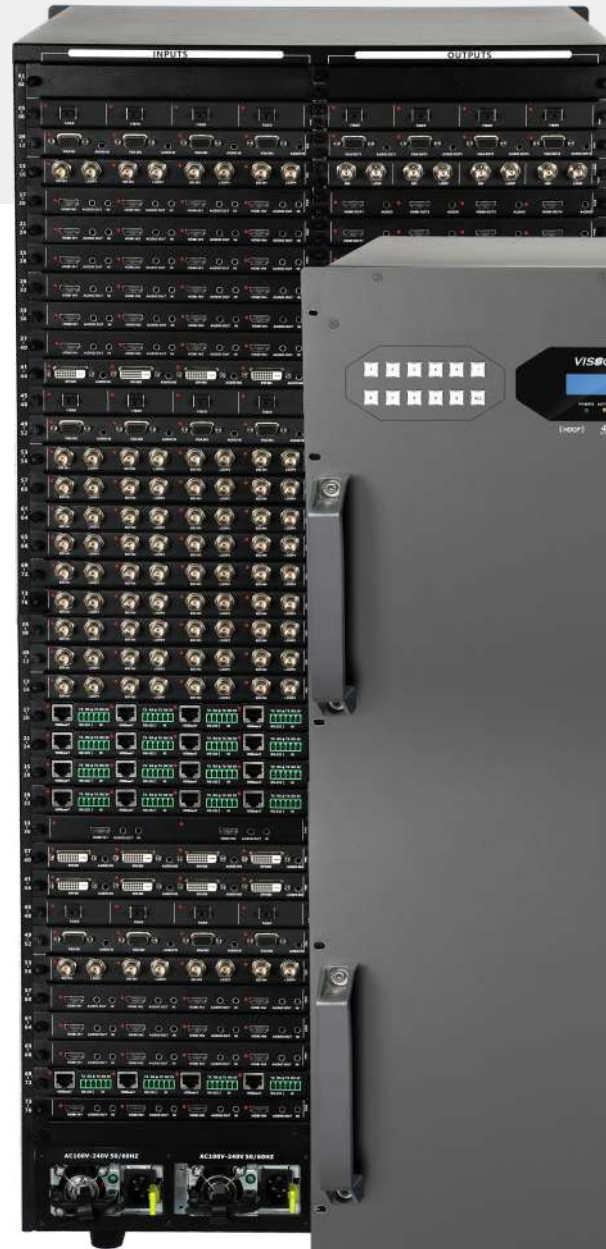

VW-VM144144

VIS-CON ENT5

Built-in web interface in control card

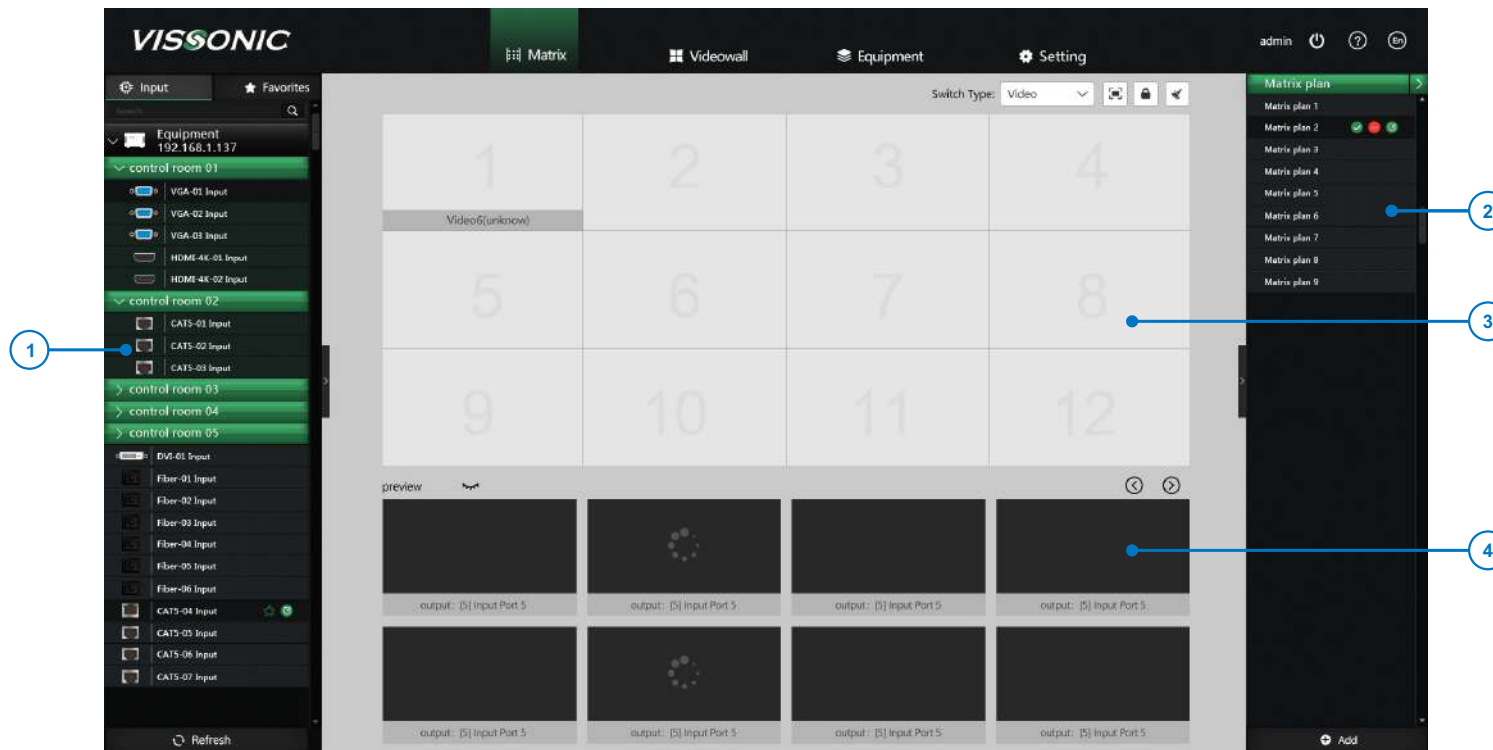

① Input ② plan ③ output ④ preview

- Graphical user interface with drag-and-drop operation
- Support operation from multi-terminal devices, real-time synchronization of status
- Preview card supports visual control on the mobile terminal
- Display board information such as temperature or fan speed
- Draw windows in any display area and generate new signals
- Optional KVM can perform multi-screen operation

Rich interfaces

Using the pure hardware technology architecture of FPGA, but not using hard disk, no operating system, avoiding system crash and computer virus intrusion; Full modular architecture, users can customize the corresponding board according to their own needs. Enough system source for each card, adding cards to large quantity will not affect the system performance. Hot swap and Plug and play for all cards.

Compatible expansion


It adopts B/S architecture, supports Android, iOS, Windows systems and does not need to install software and plug-ins. The use of IP boards can also support network monitoring access, support web login to set network protocols, onvif, RTP, RTSP, RTCP, TCP, UDP and other network protocols.

Featured functions

Management: Visualized operation management of professional signal source, multi-channel one-to-N input and output switching.

Operation: Equipped with LCD display and buttons, it can still switch accurately in dimly lit environment.

Compatible: All platforms are compatible and do not need to install any software.

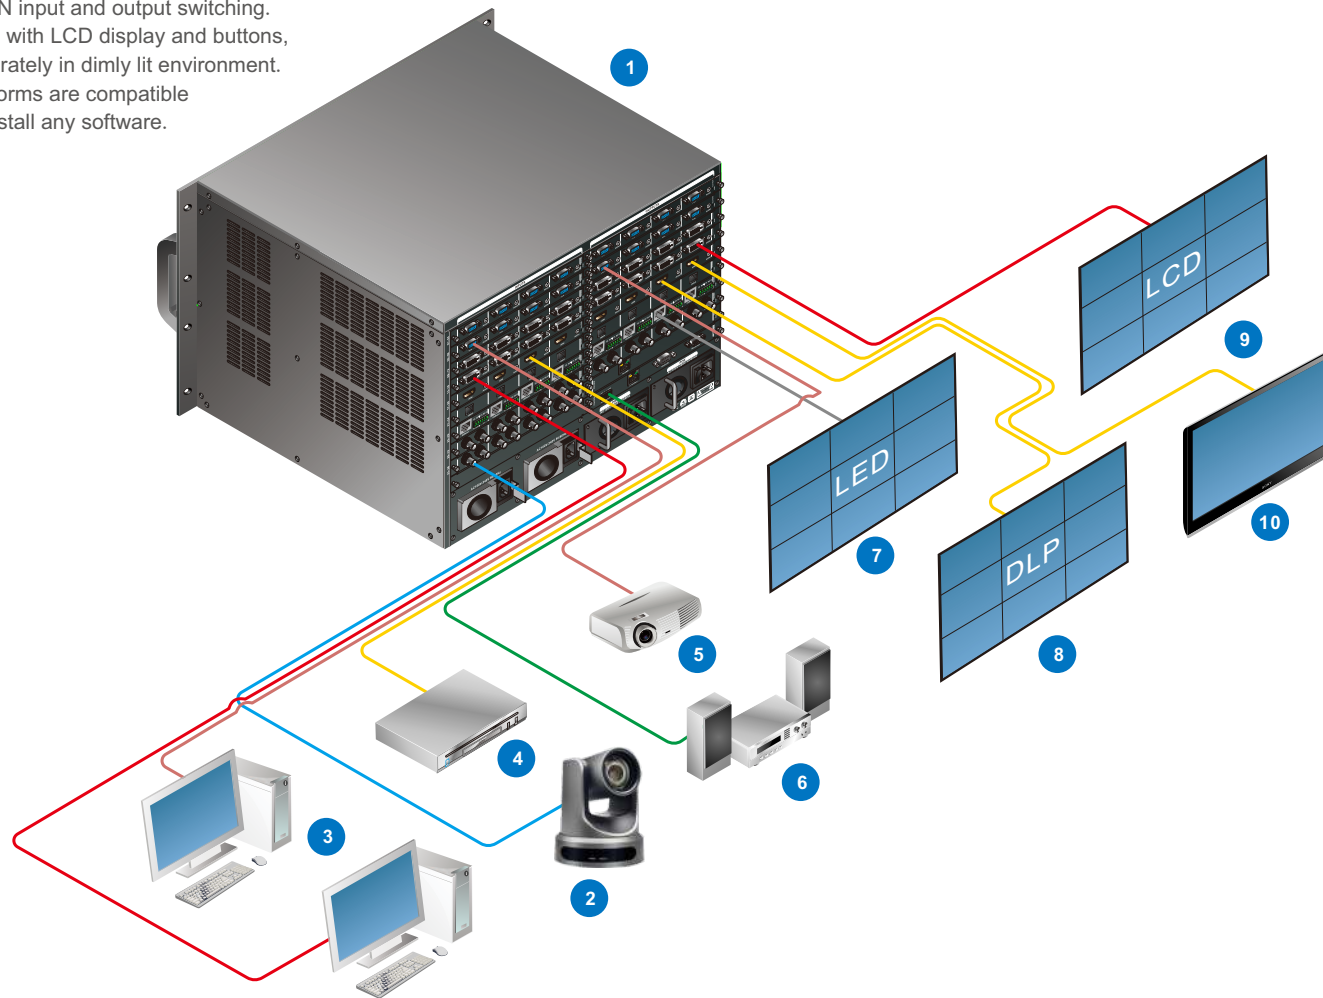

- 1 VIS-VM3636
Modular seamless switching
video wall processor
- 2 VIS-CDC
Full HD camera
- 3 PC
- 4 DVD
- 5 Projector
- 6 Power amplifier
- 7 LED
- 8 DLP
- 9 LCD
- 10 4K HD display

- CAT5e
- HDMI
- SDI
- DVI
- VGA
- Audio

4K



Using digital network to upgrade video matrix switching technology



B-3

4K matrix and transmitter

Video conference and security monitoring often need to call and switch signals, and the workflow is time-consuming and labor-intensive. So we have developed and manufactured cost-effective PHD video switching matrix.

It's easier to switch a little of video signals, but what about lots of video signal sources? PHD video Matrix makes video signal management faster and easier.

Equipped with high-performance processing chip and high fault-tolerant code, it can work continuously for 7x24 hours, cater to the current mainstream video resolution and backward compatible with 4Kx2K adaptive resolution.

Fast switching and strong performance

Fully digital switching can maximize the switching response, and PHD video matrix response logic is IP point-to-point switching. The digital signal input transmission is nearly lossless, presenting accurate color reproduction of the transmitted picture, no video dragging and perfect synchronisation of audio and video.

The strong performance is not only reflected in the video transmission, but also in the powerful pre-stored switching mode. The device can store multiple sets of switching plans, and switch in different scenes or emergency scenes with one click, making the video switching more time-saving and fast.

Rs232, central control software and other fast switching control methods enrich the user's operating experience.

Low power consumption and power-off memory

Thanks to hardware and logic optimization, the maximum power of the device can be fully loaded with only 20W. It has power-off memory function. It can automatically remember the state and signal source when the power is turned off by chance. PHD video matrix can automatically resume switching and display instead of resetting the switch when the power supply is restored.

Enterprise-level and long-distance transmission

Industrial grade all metal chassis can be used for 1U or 2U rack. Built-in transmission enhancement function, it can transmit 30 meters of input signals without external signal amplification, saving cost and wiring work for project construction. PHD Video Matrix, which is suitable for most of displays, such as DVD, projector, splicing screen, TV, etc., can transmit 3D video resource. The built-in firmware upgrade can be updated online in real time, which can expand the use of more devices through firmware update.





Transportation center
&
Large display



Command center
&
Control Room

Application scenario



4K

Professional video switching matrix with fast switching

Stable, strong and reliable performance

The switching is fast, and every frame is smooth



VIS-PHD44

4x4 4K HDMI matrix

- 4 channel input and 4 channel output
- Up to 4Kx2K@60HZ
- Software control and online upgrade
- Full digital switching technology and high-performance processing algorithm
- HDMI2.0 and HDCP1.4 protocol
- The signal can be converted by an adapter and compatible with DVI1.0 standard
- HDMI output with analog audio extraction



VIS-PHD88

8x8 4K HDMI matrix

- 8 channel input and 8 channel output
- Up to 4Kx2K@60HZ
- Software control and online upgrade
- Full digital switching technology and high-performance processing algorithm
- HDMI2.0 and HDCP1.4 protocol
- The signal can be converted by an adapter and compatible with DVI1.0 standard
- HDMI output with analog audio extraction



VIS-PHD1616

16x16 4K HDMI matrix

- 16 channel input and 16 channel output
- Up to 4Kx2K@60HZ
- Software control and online upgrade
- Full digital switching technology and high-performance processing algorithm
- HDMI2.0 and HDCP1.4 protocol
- The signal can be converted by an adapter and compatible with DVI1.0 standard
- HDMI output with analog audio extraction



VIS-HE7

HDbaseT extender for 70m

- Uncompressed full-digital transmission box
- 4K video can be transmitted up to 40 meters
- 1080P video can be transmitted 70m away
- RS232 and IR bidirectional control and bidirectional POC power supply
- HDMI1.4 and HDCP1.4 protocol
- The signal can be converted by an adapter and compatible with DVI1.0 standard



VIS-HE10

HDbaseT extender for 100m

- Uncompressed full-digital transmission box
- 4K video can be transmitted up to 70m
- 1080P video can be transmitted 100m away
- RS232 and IR bidirectional control and bidirectional POC power supply
- HDMI1.4 and HDCP1.4 protocol
- The signal can be converted by an adapter and compatible with DVI1.0 standard



VIS-HE20

HDMI/VGA to HDbaseT Wallplate

- Flush-mounting wall video transmission box
- Separate or joint transmission of video and audio
- Video and control signals can be transmitted 100m
- RS232 and IR bidirectional control and bidirectional POC power supply
- HDMI1.3 and HDCP1.3 protocol
- The signal can be converted by an adapter and compatible with DVI1.0 standard



- 1 VIS-PHD44
4K HDMI matrix
- 2 VIS-CDC
Full HD camera
- 3 DVD
- 4 All-in-one PC
- 5 Power amplifier
- 6 Projector
- 7 PC
- 8 HD display

- CAT5e
- HDMI
- Audio

Standalone matrix

Compared to hybrid matrix, PHD video matrix is more cost-effective. Selecting the HDMI port on the market as the main transmission port, the device is compatible with lots of video transmission protocol to solve the complex problem of video port types. When the display device has no HDMI port, the user can choose the adapter for ports conversion, such as VGA to HDMI, DVI to HDMI, DP to HDMI, etc.

Easy to use


The device can be used after power-on and connect with input/output cable without complicated settings. There are rich control ways, such as by button, by software and by central control. Graphical software control can set lots of switching modes with quick management to solve the traditional matrix switching complex problem. For example, using the EDID function that delivers control commands to the screen switches input into output. With intelligent heat dissipation treatment, the device can work for 7x24 hours and automatically adjust according to the current transmission bandwidth and task.

Featured functions

Management: Professional visualized management of signal sources and detailed switching using software.

Operation: Equipped with LCD display and buttons, it can still switch accurately under dim lighting environment.

Compatible: Digital video ports conversion of multiple protocols.

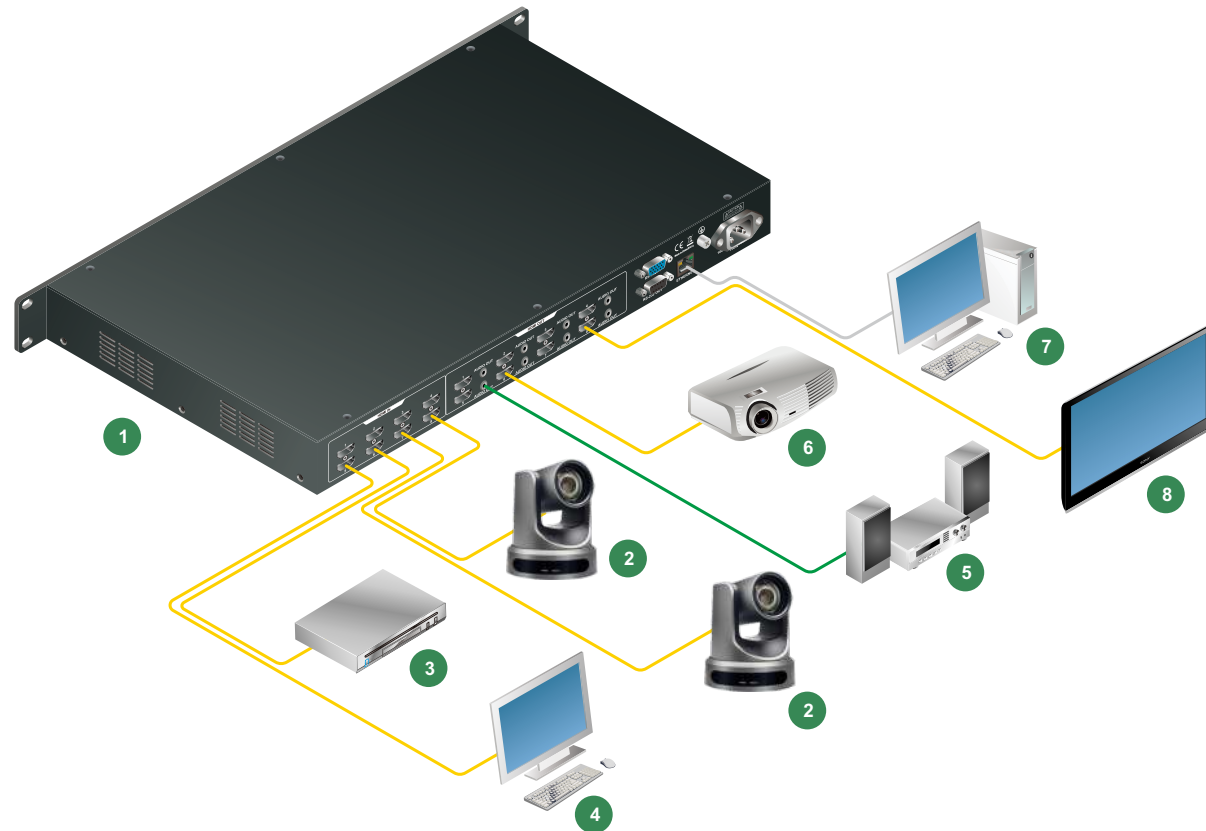

B-4 Seamless matrix and video wall processor



VIS-UHD0808-VW

4K UHD matrix and video wall processor

- Support HDMI 2.0/HDCP 2.2
- HDMI video output resolution up to 3840x2160@60
- Support seamless switching
- Video wall splicing function
- Support IR matrix
- HDMI audio can extract
- External LR audio insert on HDMI stream
- EDID management
- Front panel, RS232, TCP/IP (LAN 10M/100M), software & Web GUI control



VIS-PSC1202

Professional scaler switcher

- Perfect scaling and deinterlacing technology
- HDCP compliance
- Up to 1080p/3840x2160@30 resolutions with input and output
- Analog audio output with 3.5mm jacket and 5 pin phoenix female connector
- Built in performance management – color, brightness, contrast and sharpness adjust
- On-Screen-Display (OSD) Menu for easy configuration
- Control the unit with front button, RS232 port and TCP/IP



VIS-Quad41

4x1 multi-viewer and 12x1 switcher with KVM

- Single display unit display 4 HD or analog signal synchronously under Quad mode
- Support KVM function, that is USB mouse keyboard with video synchronous switch
- Compatibility all kinds of input resolution and support output resolution of 1920*1080
- Size and position of image can be adjust arbitrarily, and other functions, such as: windowing, superposition, roaming, PIP, POP
- Can be controlled by case key, IR, RS-232 serial port and center control.
- High quality HD quad video

B-4 Seamless matrix and video wall processor



VIS-QuadKVM

7x1 multi-viewer with KVM

- With one 1 VGA, 2 DP, 4 HDMI (including 3-way compatible MHL) input signal, the input resolution up to 3840 * 2160 @ 60HZ, downward compatible
- With one HDMI 2.0 output, the output resolution up to 3840*2160 @ 60HZ
- Point-to-point simultaneous display 4-way 1920*1080 full HD signal
- 2 USB signal output, USB connection support mouse and keyboard, and USB with image synchronous switch
- Support Quad mode and Full screen, PIP and POP mode

VIS-MV71

7x1 multi-viewer & scaler

- With Quad-mode ,Full screen, and fix position POP, PIP function
- 1 VGA, 2-way DP, 4-way HDMI (including 3-way compatible MHL) input signal
- 1 HDMI output with resolution up to 1920 * 1080 @ 60HZ
- All input signals contain audio, support audio and video synchronous switching and four audio independent switching under quartering
- Control by chassis buttons, IR remote control, RS-232 control