

VISSONIC

Professional Audio Video Manufacturer

Wi-Fi Wireless Conference System


PRODUCT DATASHEET



VISSONIC ELECTRONICS LTD.

Think Solutions

Application diagram

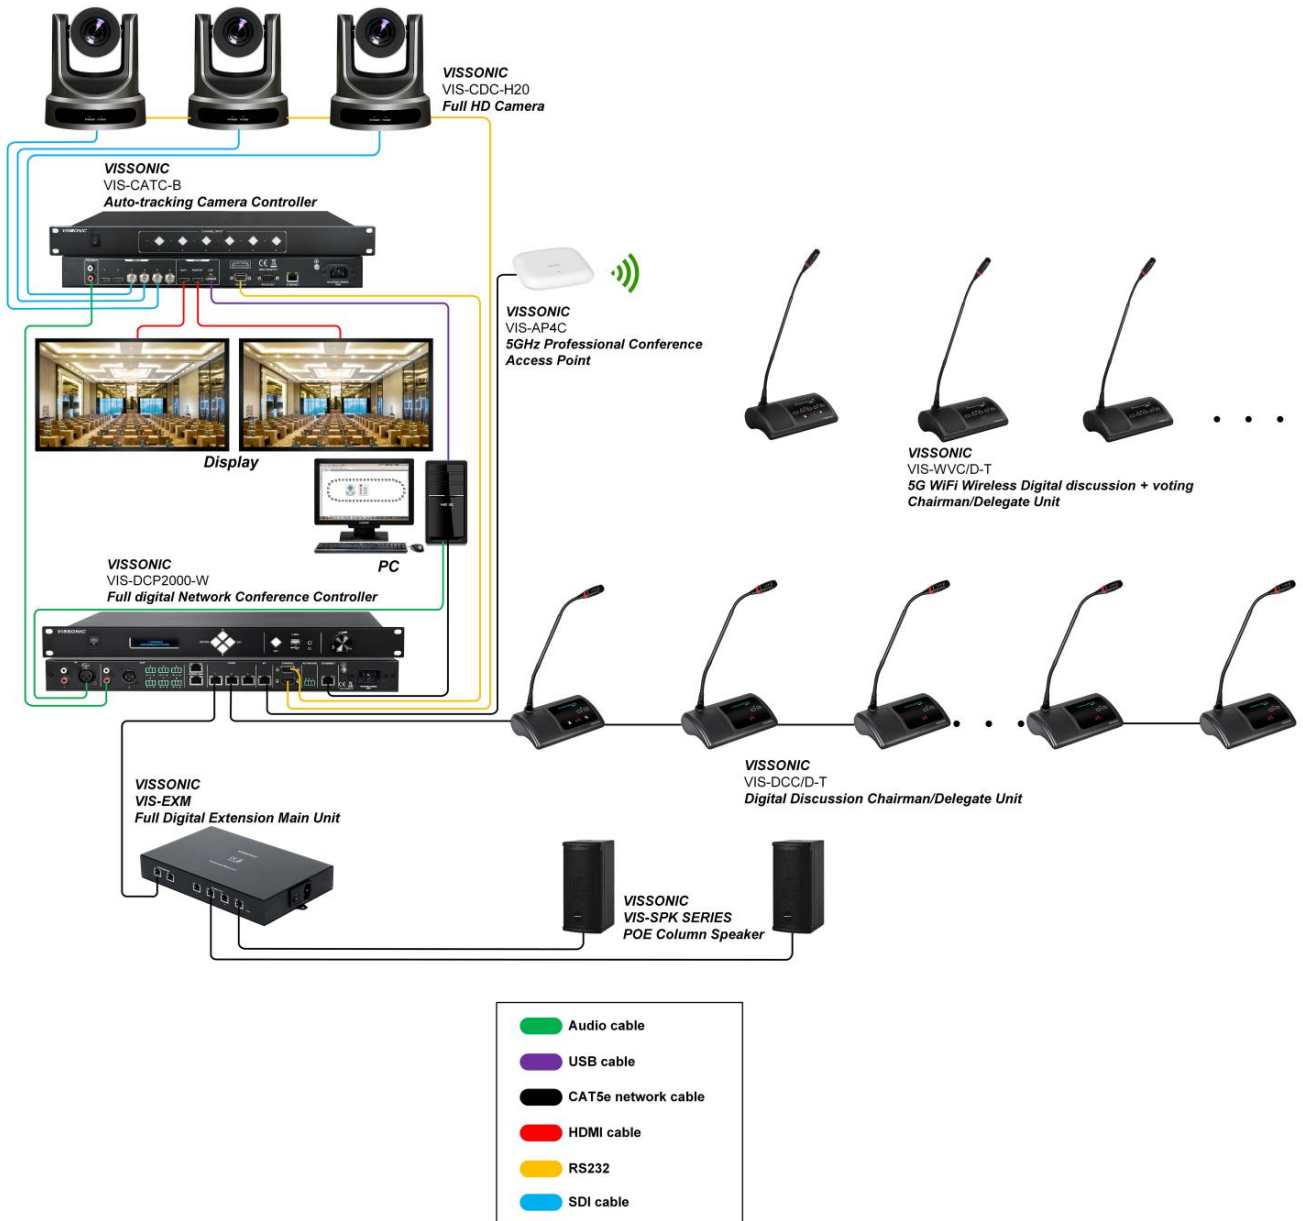

New Generation **5GHz Wi-Fi** **Wireless** Conference System, with High Tech in DSP unique Sound Processing

CLEACON 5GHz Wi-Fi Wireless Conference System

Standard Wi-Fi Communication

Our CLEACON wireless conference system is an innovative system based on standard Wi-Fi technology and self-adjustment technology. The system work in the 5GHz band and get the 44 channels for communication to coexist with other Wi-Fi network. The unique self-adaptive technology is strong anti-interference ability ensure the system interference-free and highly flexible for different application. The standard Wi-Fi Technology make the system can work in around the world and no ISM limit.

Ease of Use

The system is no additional cabling and testing and run under the 25-meter radius of Wi-Fi signal which is full 360-degree coverage. All microphone units automatically identify the access point and communicate with WPA2 secure connection to ensure the conferencing safety.

Compact yet versatile design

The product design reflects the elegant, yet compact and easy to use features. Conference unit features a graphical interface operating area, including lighting reminder, anyone can get started quickly. Easy to install, user-friendly to use, and is designed to ensure higher productive meetings.

Excellent legibility sound

Advanced voice processing technology, with the unique design of the microphone head, this unit can be accurate pickup and restore the human voice through a high-quality built-in speakers or an external PA system, original AUDIO-LINK digital ring network technology, Automatic Gain Control Volume(AGC) / automatic frequency control(AFC) technology help reach higher volume without triggering the howling effect, ensures clear sound to every person in the room.

High tech intelligence platform

Timing function, overtime speaking reminder, voting results multi-platform synchronization, network control and meeting management, conference Smart reservation, worldwide firmware real-time updates, the integration of IT technologies ensures smart conferencing platform, the CLEACON is one of them.

VIS-DCP2000-W

Full Digital Networked DSP Conference Processor



Features

- The unique AUDIO-LINK digital ring network technology achieve full-digital signal transmission and processing
- One CAT5e cable to transmit up 64 channels audio and other signals.
- All microphone units support audio, ID independent output. Working with voice recognition system to achieve voice role separation.
- High-fidelity sound quality by lossless audio transmission technology, 48K audio sampling rate and 20Hz ~ 20KHz frequency response
- A single conference controller can realize the independent control and merging of 4 conference rooms, can handle the cascade of multiple conference controllers to realize the merging and separation of larger conference rooms (Optional).
- "Hand-in-Hand-Loop-Network" connection makes the system always working perfectly no matter changing discussion unit or having any malfunctioned units
- The sensitivity of the unit microphone and 8 segment equalizer EQ adjusted independently.
- Conference controller can output 16 segment equalized EQ to achieve sound field adjustment; pressure limit, which can recognize the noise gate passed by human voice. AGC automatic volume gain control; AFC automatic feedback suppression and auto-mix technology.
- Sound output by separated zones function, each zone is automatically adjusted according to the volume of the position of the microphone, achieve longer distances pickup without whistle.
- Echo cancellation, remote two-way real-time call with another conference controller or another third-party video conferencing terminal.
- USB recording, controller monitor, advanced noise cancellation technology to realize clearer recording.
- System date, time management, and support count-down speech.
- Optional DANTE output module with other DANTE equipment used.
- Can drive 2x120W POE speaker, through extension main unit, support up to 16 POE speakers.

Functions

- Compliance with IEC 60914, GBT 15381-94
- Connect with VIS-EXM full-digital extension main unit, it can expand to 5200 discussion units
- "Hand-in-Hand-Loop-Network" connection and the system assigned to each unit independently ID to avoid ID conflict.

- Both wired/wireless discussion units can connect to the controller, fast and easily to adding delegate of meetings.
- Up to 8 wireless microphones to be turned on at the same time, adaptive avoiding interference technology to achieve stronger anti-interference ability, compliance with IEEE 802.11n standard Wi-Fi both for 5GHz.
- 2 channel audio input, XLR or RCA type, for local audio input or remote video-conferencing input.
- Maximum 8-channel audio output, XLR, RCA or Phoenix type, can be connected to simultaneous interpretation output or partitioned output.
- Add the audio input box, the system can be connected to other condenser microphones or dynamic microphones, more choices for users.
- Built-in multi-way internal communication function.
- TCP/IP connection between controller and PC
- RS232 central control, realize microphone switch, priority, volume and other controls.
- RS232 or RS485 to send the PELCO/VISCA protocol to realize camera auto-tracking function.
- Hot plug-and-play, and auto-recovery function.
- Wide range of voltage from 100V~240VAC
- Without using PC software, our conference controller still owns following settings:
 - Limit on the number of speaking persons: By Setting the number of active units at the same time (Number is 1/2/4/6/ units), supports up to open 32 wired microphones in full-on mode.
 - Discussion modes:

"OPEN" Free for all, limited by the active units setting by controller, "VOICE" Can activate MIC by detecting sound without press button, "OVERRIDE" First in First out, "APPLY" To apply then to speak, "PTT" Press to speak(Optional),"ALL" Full open mode(Optional).

- Voting function: Approve/Abstain/Object
- Chairman unit has priority to close all other units or mute them temporarily
- Chairman unit can consent the application for speaking from delegate
- Simultaneous language interpretation
- With PC software to add more ways of voting:
 - Approve/Object
 - Approve/Abstain/Object
 - Level: 1/2/3/4/5
 - Ranking: --/0/+/++
- By using RFID card to identify, can realize voting with names.

Control & Indicators

LCD display to show all the operations and results

4-Way button for menu operate

One-button press to start recording

light indicator

Master volume control knob

Interfaces

Front panel USB recording interface

3.5mm headphone for monitoring
1x RCA audio input
1x XLR audio input
1x RCA audio output
1x XLR audio output
6x Phoenix audio output connector
2x RJ45 digital audio connection
2x RJ45 for chairman unit, delegate unit, unit translators and other connection
1x RJ45 for wireless AP or router
1x DP9 male interface for external control
1x DP9 female interface for camera
1x three-pin phoenix interface for camera control keyboard
1x RJ45 for computer connection or network switcher
1x grounding screw
1x 100 ~ 240V AC Power Interface

Technical Parameters

Power 100V / 240V AC
Static power consumption 12W
Maximum power consumption 150W
Frequency Response 20Hz ~ 20KHz
Noise ratio (S / N) >96dBA
Total harmonic distortion <0.05%
Channel Crosstalk > 85dB
Dynamic range >94dB
RS-232 control: 1×9-pole Sub-D female socket 1×9-pole Sub-D male socket
Ethernet control: RJ45 connected to PC
Mounting: 19" standard rack
Dimensions (mm) 483L x 260W x43.6H
Weight: 3kg
Black color

Max. audio inputs
LINE IN 1: +10dBu
LINE IN 2: +10dBu
Max. audio outputs
LINE OUT 1: +12dBu BAL.
LINE OUT 2: +12dBu BAL.
LINE OUT 3: +12dBu BAL.
LINE OUT 4: +12dBu BAL.

Transmission technology: WIFI 802.1n
Encryption technology: WPA2-PSK AES
Page 7

Working frequency: 5.2-5.8 GHZ

Output impedance: >1kΩ

PC communication method: TCP/IP

Camera control method: RS-232/UDP

Network Interface: RJ45

Display: LCD1602

Limit on the number of speakers: 1/2/4, max in 6 persons

Camera Tracking Protocol: PELCO-P/PELCO-D/VISCA

Operating temperature: 0 ~ 45°C

Storage temperature: 20 ~ 50°C

Item Model for Order

VIS-DCP2000-W..... Full digital network DSP conference processor

CLEACON Series VIS-WDC-T/VIS-WDD-T

Wireless Digital Discussion Chairman/Delegate Unit



Features

- Stylish, low profile design with touchable interface
- Wireless communication, setting up all system in few minutes to be ready for using, and put them away in short time as well
- Built-in DC connector for power supply without battery
- Detachable battery pack is easy to replace and charge, 4 hours to fully charged. Can use 24 hours continuously
- Internal high-fidelity loudspeaker
- Pluggable microphone and long range sound pickup ability, support different length of microphone.
- 2.23-inch OLED display with backlight, with status of signal and battery indication icon
- Head-set interface in both sides with volume adjust
- Line-in interface which allows microphone or other line-in device like cell phone, laptop to pass audio through to perform teleconference
- Full-digital signal transmission and processing, completely avoid the RF interference from cell phone or similar devices.
- The unit showing time/date on the screen. Timer on display to set certain time for each delegate to speak, will remind user or close the MIC automatically.
- All units can be configured as Chairman or Delegate unit through software settings based on model VIS-WDC-T.

Functions

- Compliance with IEC 60914, GBT 15381-94
- Standard Wi-Fi technology is compatible with other Wi-Fi networks, support 5GHz on all channels.
- Full-digital transmission and processing technology in uncompressed audio, professional microphone to achieve perfect sound quality at 20Hz ~ 20KHz;
- 128 bits digital encryption technology, with WAP2 secure connection, MAC address filtering, SSID-hiding to prevent wiretapping and unauthorized access from delegate unit
- One AP can work with more than 40 wireless units, and more units can be connected by extension APs
- 6 wireless units can be activated at the same time by the users
- Support more AP working together to increasing the Wi-Fi coverage range for wireless MIC units working in a large conference room or multi-rooms
- With our HD PTZ camera and video matrix switcher, using RS485 or RS232 protocol to send the PELCO/VISCA protocol to realize camera auto-tracking function
- Precise cardioid directional microphone capsule with anti-wind microphone foam, with two-color LED indicator
- Button for MIC ON/OFF, Priority & Apply Answer button for chairman unit
- Built-in high-fidelity speakers, it automatically mutes to prevent howling when press MIC ON
- Head-set interface in both sides with volume adjustment.
- AGC (Automatic Gain Control)/AFC (Adaptive Feedback Cancellation)/ANC (Active Noise Control)/Mix (Auto-Mix) technology
- Build-in functions for intercom
- Without using PC software, our conference controller still owns following settings:
 - Limit on the number of speaking persons: By Setting the number of active units at the same time (Number is 1/2/4/6/ units)
 - Discussion modes:
"OPEN" Free for all, limited by the active units setting by controller, "OVERRIDE" First in First out, "VOICE" Can activate MIC by detecting sound without press button, "APPLY" To apply then to speak
- The unit showing real time on the screen, and count-down timer for speaking person.
- Detachable battery pack is easy to replace and charge, 4 hours to fully charged. Can use 24 hours continuously, power-saving technology to enable 24 hours continuous use and 48 hours for standby.
- Combined with camera and camera tracking controller, it has an automatic camera tracking function.
- With 2.5mm adapter power supply interface, used for emergency power supply.
- Built-in MCU, support wireless upgrade of all units.
- With voice control function, you can adjust the sensitivity of voice control, intelligently turn on the microphone and set the off time.

Control & Indicators

Microphone with two-color LED ring, red indicates speaking status, green indicates request to speak. 128x32 OLED display with volume bar, clock, time span of microphone activating, MIC ON/OFF etc. and other information.

Indicator for Volume adjustment

Indicator for MIC ON/OFF

Chairman unit with priority button and consent button for the delegates

Power ON/OFF button is hiding on the left side

Interfaces

Pluggable gooseneck microphone base

2x 3.5mm stereo headphone jack

1x 3.5mm stereo input jack

Contact for battery pack

DC Connector for power adaptor

Technical Parameters

Button: Touchable interface

Sound Pickup: heart type capacitance

Display: OLED display 128 × 32

Sensitivity: -46 dBV / Pa

Maximum power consumption: 2.0W

Directivity: 0 ° / 180 ° > 20 dB (1 kHz)

Headphone load: 16Ω

Headphone volume: 10mW

Headphone jack: 3.5mm stereo

Input impedance: 2kΩ

SNR: 70dB

Frequency response: 20 ~ 20000Hz

Equivalent noise: 20dBA (SPL)

Main material: ABS

Operating temperature: 0 °C to + 55 °C

Color: Black

The maximum sound pressure: 125dB (THD <3%)

Weight: 1.1kg (with microphone)

Dimension: 195L × 120W × 60Hmm (without microphone)

Item Model for Order

VIS-WDC-T.....Wireless Discussion Chairman unit, battery and microphone are not included

VIS-WDD-T.....Wireless Discussion Delegate unit, battery and microphone are not included

VIS-WBTY1.....Battery pack for each unit,7.2VDC,4900mA

VIS-WCH1.....Charger for battery

VIS-M220.....Pluggable Gooseneck Microphone 220mm, unique design

VIS-M330.....330mm Microphone, with anti-wind foam cover

VIS-M410.....410mm Microphone, with anti-wind foam cover

VIS-M485.....485mm Microphone, with anti-wind foam cover

VIS-M600.....600mm Microphone, with anti-wind foam cover

CLEACON Series VIS-WVC-T/VIS-WVD-T

Wireless Digital Discussion+Voting Chairman/Delegate Unit



Features

- Stylish, low profile design with touchable interface
- Wireless communication, setting up all system in few minutes to be ready for using, and put them away in short time as well
- 5 buttons for voting and ranking.
- Detachable battery pack is easy to replace and charge, 4 hours to fully charged. Can use 24 hours continuously, working time is 24 hours, 40 hours for standby
- Built-in DC connector for power supply without battery
- Internal high-fidelity loudspeaker
- built-in up 3 channels interpretation (optional on another model)
- Pluggable microphone and long-range sound pickup ability, support different length of microphone.
- 2.23-inch OLED display with backlight, with status of signal and battery indication icon
- Head-set interface in both sides with volume adjust
- Line-in interface which allows microphone or other line-in device like cell phone, laptop to pass audio through to perform teleconference
- Full-digital signal transmission and processing, completely avoid the RF interference from cell phone or similar devices.
- The unit showing time/date on the screen. Timer on display to set certain time for each delegate to speak, will remind user or close the MIC automatically.
- All units can be configured as Chairman or Delegate unit through software settings based on model VIS-WVC-T.

Functions

- Compliance with IEC 60914, GBT 15381-94
- Standard Wi-Fi technology is compatible with other Wi-Fi networks, support 5GHz on all channels.
- Full-digital transmission and processing technology in uncompressed audio, professional microphone to achieve perfect sound quality at 20Hz ~ 20KHz;

- 128 bits digital encryption technology, with WAP2 secure connection, MAC address filtering, SSID-hiding to prevent wiretapping and unauthorized access from delegate unit
- One AP can work with more than 40 wireless units, and more units can be connected by extension APs
- 6 wireless units can be activated at the same time by the users
- Support more AP working together to increasing the Wi-Fi coverage range for wireless MIC units working in a large conference room or multi-rooms
- With our HD camera and video matrix switcher, using RS485 or RS232 protocol to send the PELCO/VISCA protocol to realize camera auto-tracking function
- Precise cardioid directional microphone capsule with anti-wind microphone foam, with two-color LED indicator.
- 5 voting buttons and 1 MIC ON/OFF button, Priority & Apply Answer button for chairman unit
- Built-in high-fidelity speakers, it automatically mutes to prevent howling when press MIC ON
- Head-set interface in both sides with volume adjust
- AGC (Automatic Gain Control)/AFC (Adaptive Feedback Cancellation)/ANC (Active Noise Control)/Mix (Auto-Mix) technology
- Build-in functions for intercom
- Without using PC software, our conference controller still owns following settings:
 - Limit on the number of speaking persons: By Setting the number of active units at the same time (Number is 1/2/4/6/ units)
 - Discussion modes:
"OPEN" Free for all, limited by the active units setting by controller, "OVERRIDE" First in First out, "VOICE" Can activate MIC by detecting sound without press button, "APPLY" To apply then to speak
 - Voting function: Approve/Abstain/Object
 - Chairman unit has priority to close all other units or mute them temporarily
 - Chairman unit can consent the request for speaking from delegate
- More voting functions available by PC software
- The unit showing real time on the screen, and count-down timer for speaking person.
- Detachable battery pack is easy to replace and charge, 4 hours to fully charged. Can use 24 hours continuously, power-saving technology to enable 24 hours continuous use and 48 hours for standby
- Combined with camera and camera tracking controller, it has an automatic camera tracking function.
- With 2.5mm adapter power supply interface, used for emergency power supply.
- Built-in MCU, support wireless upgrade of all units.
- With voice control function, you can adjust the sensitivity of voice control, intelligently turn on the microphone and set the off time.

Control & Indicators

Microphone with two-color LED ring, red indicates speaking status, green indicates request to speak.

128x32 OLED display with volume bar, clock, time span of microphone activating, MIC ON/OFF etc. and other information.

Indicator for Volume adjustment

5 voting keys with indicators, while no launching voting, no.2 and no.3 button is also work as channel selecting buttons, no.4 and no.5 work as volume buttons.

Indicator for MIC ON/OFF

Chairman unit with priority button and consent button for the delegates

Power ON/OFF button is hiding on the left side

Interfaces

Pluggable gooseneck microphone base

2x 3.5mm stereo headphone jack

1x 3.5mm stereo input jack

Contact for battery pack

DC Connector for power adaptor

Technical Parameters

Button: Touchable interface

Sound Pickup: heart type capacitance

Display: OLED display 128 × 32

Sensitivity: -46 dBV / Pa

Maximum power consumption: 2.0W

Directivity: 0 ° / 180 ° > 20 dB (1 kHz)

Headphone load: 16Ω

Headphone volume: 10mW

Headphone jack: 3.5mm stereo

Input impedance: 2kΩ

SNR: 70dB

Frequency response: 20 ~ 20000Hz

Equivalent noise: 20dBA (SPL)

Main material: ABS

Operating temperature: 0 °C to + 55 °C

Color: Black

The maximum sound pressure: 125dB (THD <3%)

Weight: 1.1kg (with microphone)

Dimension: 195L × 120W × 60Hmm (without microphone)

Item Model for Order

VIS-WVC-T.....Wireless Voting and interpretation Chairman unit, battery and microphone are not included

VIS-WVD-T.....Wireless Voting and interpretation Delegate unit, battery and microphone are not included

VIS-WBTY1.....Battery pack for each unit,7.2VDC,4900mA

VIS-WCH1.....Charger for battery

VIS-M220.....Pluggable Gooseneck Microphone 220mm, unique design

VIS-M330.....330mm Microphone, with anti-wind foam cover

VIS-M410.....410mm Microphone, with anti-wind foam cover

VIS-M485.....485mm Microphone, with anti-wind foam cover

VIS-M600.....600mm Microphone, with anti-wind foam cover

CLEACON Series VIS-WVCIC-T/VIS-WVDIC-T

Wireless Digital Discussion+ Voting IC Card Chairman/Delegate Unit



Features

- Stylish, low profile design with touchable interface
- Wireless communication, setting up all system in few minutes to be ready for using, and put them away in short time as well
- 5 buttons for voting and ranking, IC card authentication will be required before voting and ranking
- Detachable battery pack is easy to replace and charge, 4 hours to fully charged. Can use 24 hours continuously, working time is 24 hours, 40 hours for standby
- Built-in DC connector for power supply without battery
- Internal high-fidelity loudspeaker
- built-in up 3 channels interpretation (optional on another model)
- Pluggable microphone and long-range sound pickup ability, support different length of microphone.
- 2.23-inch OLED display with backlight, with status of signal and battery indication icon
- Head-set interface in both sides with volume adjust
- Line-in interface which allows microphone or other line-in device like cell phone, laptop to pass audio through to perform teleconference
- Full-digital signal transmission and processing, completely avoid the RF interference from cell phone or similar devices.
- The unit showing time/date on the screen. Timer on display to set certain time for each delegate to speak, will remind user or close the MIC automatically.
- All units can be configured as Chairman or Delegate unit through software settings based on model VIS-WVCIC -T.

Functions

- Compliance with IEC 60914, GBT 15381-94
- Standard Wi-Fi technology is compatible with other Wi-Fi networks, support 5GHz on all channels.
- Full-digital transmission and processing technology in uncompressed audio, professional microphone to achieve perfect sound quality at 20Hz ~ 20KHz;
- 128 bits digital encryption technology, with WAP2 secure connection, MAC address filtering, SSID-hiding to

prevent wiretapping and unauthorized access from delegate unit

- One AP can work with more than 40 wireless units, and more units can be connected by extension APs
- 6 wireless units can be activated at the same time by the users
- Support more AP working together to increasing the Wi-Fi coverage range for wireless MIC units working in a large conference room or multi-rooms
- With our HD camera and video matrix switcher, using RS485 or RS232 protocol to send the PELCO/VISCA protocol to realize camera auto-tracking function
- Precise cardioid directional microphone capsule with anti-wind microphone foam, with two-color LED indicator.
- 5 voting buttons and 1 MIC ON/OFF button, Priority & Apply Answer button for chairman unit
- Built-in high-fidelity speakers, it automatically mutes to prevent howling when press MIC ON
- Head-set interface in both sides with volume adjust
- AGC (Automatic Gain Control)/AFC (Adaptive Feedback Cancellation)/ANC (Active Noise Control)/Mix (Auto-Mix) technology
- Build-in functions for intercom
- Without using PC software, our conference controller still owns following settings:
 - Limit on the number of speaking persons: By Setting the number of active units at the same time (Number is 1/2/4/6/ units)
 - Discussion modes:
 - "OPEN" Free for all, limited by the active units setting by controller, "OVERRIDE" First in First out, "VOICE" Can activate MIC by detecting sound without press button, "APPLY" To apply then to speak
 - Voting function: Approve/Abstain/Object
 - Chairman unit has priority to close all other units or mute them temporarily
 - Chairman unit can consent the request for speaking from delegate
- More voting functions available by PC software
- The unit showing real time on the screen, and count-down timer for speaking person.
- Detachable battery pack is easy to replace and charge, 4 hours to fully charged. Can use 24 hours continuously, power-saving technology to enable 24 hours continuous use and 48 hours for standby
- Combined with camera and camera tracking controller, it has an automatic camera tracking function.
- With 2.5mm adapter power supply interface, used for emergency power supply.
- Built-in MCU, support wireless upgrade of all units.
- With voice control function, you can adjust the sensitivity of voice control, intelligently turn on the microphone and set the off time.

Control & Indicators

Microphone with two-color LED ring, red indicates speaking status, green indicates request to speak.

128x32 OLED display with volume bar, clock, time span of microphone activating, MIC ON/OFF etc. and other information.

Indicator for Volume adjustment

5 voting keys with indicators, while no launching voting, no.2 and no.3 button is also work as channel selecting buttons, no.4 and no.5 work as volume buttons.

Indicator for MIC ON/OFF

Chairman unit with priority button and consent button for the delegates

Power ON/OFF button is hiding on the left side

Interfaces

Pluggable gooseneck microphone base
2x 3.5mm stereo headphone jack
1x 3.5mm stereo input jack
Contactor for battery pack
DC Connector for power adaptor

Technical Parameters

Button: Touchable interface
Sound Pickup: heart type capacitance
Display: OLED display 128 × 32
Sensitivity: -46 dBV / Pa
Maximum power consumption: 2.0W
Directivity: 0 ° / 180 ° > 20 dB (1 kHz)
Headphone load: 16Ω
Headphone volume: 10mW
Headphone jack: 3.5mm stereo
Input impedance: 2kΩ
SNR: 70dB
Frequency response: 20 ~ 20000Hz
Equivalent noise: 20dBA (SPL)
Main material: ABS
Operating temperature: 0 °C to + 55 °C
Color: Black
The maximum sound pressure: 125dB (THD <3%)
Weight: 1.1kg (with microphone)
Dimension: 195L × 120W × 60Hmm (without microphone)

Item Model for Order

VIS-WVCIC-T.....Wireless Digital Discussion+ Voting IC Card Chairman unit, battery and microphone are not included

VIS-WVDIC-T.....Wireless Digital Discussion+ Voting IC Card Delegate unit, battery and microphone are not included

VIS-CARDWR.....Card writer to support import information on the IC card, USB connection to PC

VIS-WBTY1.....Battery pack for each unit,7.2VDC,4900mA

VIS-WCH1.....Charger for battery

VIS-M220.....Pluggable Gooseneck Microphone 220mm, unique design

VIS-M330.....330mm Microphone, with anti-wind foam cover

VIS-M410.....410mm Microphone, with anti-wind foam cover

VIS-M485.....485mm Microphone, with anti-wind foam cover

VIS-M600.....600mm Microphone, with anti-wind foam cover

VIS-ICCARD

Contactless IC card



Features

- Proven, Reliable Technology - Offers extremely consistent read range
- Fast Processing and Data Communication
- True Credit Card Thickness

Technical Parameters

Dimensions: 2.125 x 3.375 x .03" (5.4 x 8.57 x 0.076 cm)

Weight: 6g

Typical Maximum Read Range: Up to 4" (10cm)

Operating Frequency: 13.56MHz

RF Interface: ISO/IEC 14443A/MIFARE, Parts 1-3

Transaction Time: < 100ms

Baud Rate: 106 kbps

Data Retention: 10 years min.

CLEACON Series VIS-WSC-T/VIS-WSD-T

Wireless Digital **Dual Selectors** Chairman/Delegate Unit



Features

- Stylish, low profile design with touchable interface
- Wireless communication, setting up all system in few minutes to be ready for using, and put them away in short time as well
- Detachable battery pack is easy to replace and charge, 4 hours to fully charged. Can use 24 hours continuously
- Built-in DC connector for power supply without battery
- Internal high-fidelity loudspeaker
- Dual Interpretation Selectors
- Built-in up 8 channels interpretation for each selector
- Pluggable microphone and long range sound pickup ability, support different length of microphone.
- 2.23-inch OLED display with backlight, with status of signal and battery indication icon
- Head-set interface in both sides with volume adjust
- Line-in interface which allows microphone or other line-in device like cell phone, laptop to pass audio through to perform teleconference
- Full-digital signal transmission and processing, completely avoid the RF interference from cell phone or similar devices.
- The unit showing time/date on the screen. Timer on display to set certain time for each delegate to speak, will remind user or close the MIC automatically.
- All units can be configured as Chairman or Delegate unit through software settings based on model VIS-WSC-T.

Functions

- Compliance with IEC 60914, GBT 15381-94
- Standard Wi-Fi technology is compatible with other Wi-Fi networks, support 5GHz on all channels.
- Full-digital transmission and processing technology in uncompressed audio, professional microphone to achieve perfect sound quality at 20Hz ~ 20KHz;
- 128 bits digital encryption technology, with WAP2 secure connection, MAC address filtering, SSID-hiding to

prevent wiretapping and unauthorized access from delegate unit

- One AP can work with more than 40 wireless units, and more units can be connected by extension APs
- 6 wireless units can be activated at the same time by the users
- Support more AP working together to increasing the Wi-Fi coverage range for wireless MIC units working in a large conference room or multi-rooms
- With our HD camera and video matrix switcher, using RS485 or RS232 protocol to send the PELCO/VISCA protocol to realize camera auto-tracking function
- Precise cardioid directional microphone capsule with anti-wind microphone foam, with two-color LED indicator.
- 2 channels selectors and 1 MIC ON/OFF button, Priority & Apply Answer button for chairman unit
- Built-in high-fidelity speakers, it automatically mutes to prevent howling when press MIC ON
- Head-set interface in both sides with volume adjust
- AGC (Automatic Gain Control)/AFC (Adaptive Feedback Cancellation)/ANC (Active Noise Control)/Mix (Auto-Mix) technology
- Build-in functions for intercom
- Without using PC software, our conference controller still owns following settings:
 - Limit on the number of speaking persons: By Setting the number of active units at the same time (Number is 1/2/4/6/ units)
 - Discussion modes:
 - "OPEN" Free for all, limited by the active units setting by controller, "OVERRIDE" First in First out, "VOICE" Can activate MIC by detecting sound without press button, "APPLY" To apply then to speak
 - Chairman unit has priority to close all other units or mute them temporarily
 - Chairman unit can consent the request for speaking from delegate
- More voting functions available by PC software
- The unit showing real time on the screen, and count-down timer for speaking person.
- Detachable battery pack is easy to replace and charge, 4 hours to fully charged. Can use 24 hours continuously, power-saving technology to enable 24 hours continuous use and 48 hours for standby
- Combined with camera and camera tracking controller, it has an automatic camera tracking function.
- With 2.5mm adapter power supply interface, used for emergency power supply.
- Built-in MCU, support wireless upgrade of all units.
- With voice control function, you can adjust the sensitivity of voice control, intelligently turn on the microphone and set the off time.

Control & Indicators

Microphone with two-color LED ring, red indicates speaking status, green indicates request to speak.

128x32 OLED display with volume bar, clock, time span of microphone activating, MIC ON/OFF etc. and other information.

Indicator for Volume adjustment

2 groups of channels selector buttons

Indicator for MIC ON/OFF

Chairman unit with priority button and consent button for the delegates

Power ON/OFF button is hiding on the left side

Interfaces

Pluggable gooseneck microphone base
2x 3.5mm stereo headphone jack
1x 3.5mm stereo input jack
Contactor for battery pack
DC Connector for power adaptor

Technical Parameters

Button: Touchable interface
Sound Pickup: heart type capacitance
Display: OLED display 128 × 32
Sensitivity: -46 dBV / Pa
Maximum power consumption: 2.0W
Directivity: 0 ° / 180 ° > 20 dB (1 kHz)
Headphone load: 16Ω
Headphone volume: 10mW
Headphone jack: 3.5mm stereo
Input impedance: 2kΩ
SNR: 70dB
Frequency response: 20 ~ 20000Hz
Equivalent noise: 20dBA (SPL)
Main material: ABS
Operating temperature: 0 °C to + 55 °C
Color: Black
The maximum sound pressure: 125dB (THD <3%)
Weight: 1.1kg (with microphone)
Dimension: 195L × 120W × 60Hmm (without microphone)

Item Model for Order

VIS-WSC-T.....Wireless Dual Channels Chairman unit, battery and microphone are not included
VIS-WSD-T.....Wireless Dual Channels Delegate unit, battery and microphone are not included
VIS-M220.....Pluggable Gooseneck Microphone 220mm, unique design
VIS-M330.....330mm Microphone, with anti-wind foam cover
VIS-M410.....410mm Microphone, with anti-wind foam cover
VIS-M485.....485mm Microphone, with anti-wind foam cover
VIS-M600.....600mm Microphone, with anti-wind foam cover

VIS-AP4C

5GHz Conference Access Point



Features

- Connect with the Wi-fi conference processor VIS-DCP2000-W, or with the switch to extend more conference AP in the same system.
- Typical coverage range 30m
- Each AP can connect up to 50 conference units.
- Install on ceiling, wall or with stand rack mount
- 128 bits AES digital encryption technology, with WAP2 secure connection, MAC address filtering, SSID-hiding to prevent wiretapping and unauthorized access from delegate unit

Functions

- LED indicator for signal/power
- 5GHz dual band communication
- LAN support POE power supply
- RJ45 for LAN connection

Technical Parameters

RF	
WLAN Standard	IEEE802.11ac, IEEE802.11a, IEEE802.11g, IEEE802.11b
RF Frequency Bands	5GHz UNII
Max Transmission Power	27dBm
Antenna Type	Four built-in 5dBi antennas
POWER	
Supply Type	Power Over Ethernet, 802.3at, DC 12V 1.5A
Supply Voltage(at Power Consumption)	≤13W

NETWORK	
Interface	1×Gigabit WAN/POE Port, 1×Gigabit LAN Port
Link Speed	1200Mbps
Networking Addressing Capability	DHCP or Manual IP address
Cable Length	100m (max)
Cable Type	≥ Cat5e (shielded / unshielded)
Connector Type	1× RJ45
Connector LED	WAN/POE Port (UP LED), LAN Port (Down LED)
USER INTERFACE	
LED Status Indication	Power, Network Audio, Wireless (Yellow / Blue)
Reset	Push button for Factory Reset
MECHANICAL	
Dimensions	220L×220W×45H(mm)
Color	White
Weight	0.3KG
Mounting Type	Ceiling, Wall or Stand Rack

Item Model for Order

VIS-AP4C..... 5GHz Conference Access Point (White)

VIS-WBTY1

Rechargeable Battery pack for wireless unit



Features

- Long life and lasting stability of charging performance
- After fully charged it can use 24 hours
- Four hours needed to fully charge
- Efficient lithium batteries

Functions

Contactors by pop-up pins

Buckle housing to prevent poor contact or dropping

Technical Parameters

Battery capacity: 4900mAh

Output voltage: 7.2VDC

Weight: 285g

Operation temperature: -20°C~60°C

Item Model for Order

VIS-WBTY1..... Battery pack for wireless units,4900mAh 7.2VDC

VIS-WCH1..... Charger for battery, 8 pcs VIS-WBTY1 at one time

VIS-WCH1

Charger for battery



Features

- Three hours needed to fully charge
- MAX 8 pcs battery charging at one time
- Wide range power input: 100V~240V AC
- Buckle housing to prevent poor contact or dropping, light in weight for easy moving

Functions

Contactor by pop-up pins

Buckle housing to prevent poor contact or dropping

Technical Parameters

Input: 100 ~ 240VAC 50 ~ 60HZ

Output: 7.2V/1000mA

Power consumption: 20W

Size: 320Lx200Wx50H(mm)

Weight: 2KG

Item Model for Order

VIS-WBTY1..... Battery pack for wireless units, 4900mA 7.2V DC

VIS-WCH1..... Charger for battery, 8 pcs VIS-WBTY1 at one time

VIS-CNB

Splitter box



Features

- No noise design
- Compact size
- Splitting two channels for CU/DU

Functions

- To achieve loop wired architecture with star-type wired benefits
- Repeat 2 CU/DU channels for reducing the cables and different project requirements.
- No noise working design

Interfaces

2 x RJ45 loop ports and 2 xRJ45 for repeated chains ports

Technical Parameters

Dimension:80Lx50Wx23Hmm

Weigth:0.1KG

Item Model for Order

VIS-CNB..... Splitter box

VIS-M600/VIS-M485/VIS-M410/VIS-M330/VIS-M220

Pluggable Gooseneck Microphone



Features

- Precise directional microphone head with Mini design
- Two color LED ring indicator
- anti-wind microphone foam cover
- Strong audio collection ability to work with different length of microphone

Functions

- Two-color LED indicator on microphone, red for speaking, green means need acceptance from chairman to speak
- Screw lock socket to connect removable microphone

Technical Parameters

Item	VIS-M600	VIS-M485	VIS-M410	VIS-M330	VIS-M220
Directivity	Cardioid				
Sensitivity	-46dBV/Pa				
Frequency response	30Hz~20KHz				
Equivalent noise	20dBA (SPL)				
Signal-To-Noise Ratio Ref	≥96dB				
Microphone Type	Condenser				
Maximum SPL (1 kHz at 1% THD, 1 kΩ load)	125dB (THD<3%)				
Conference unit connection	Mini 6 pin.				
Input impedance	2 kΩ				

Working temperature	0~45℃				
Storage temperature	-20~50℃				
Weight	80g	80g	60g	60g	60g
Length	600mm	485mm	410mm	330mm	220mm
Color	black				

Item Model for Order

- VIS-M220.....Pluggable Gooseneck Microphone 220mm, unique design
- VIS-M330.....330mm Microphone, with anti-wind foam cover
- VIS-M410.....410mm Microphone, with anti-wind foam cover
- VIS-M485.....485mm Microphone, with anti-wind foam cover
- VIS-M600.....600mm Microphone, with anti-wind foam cover

About VISSONIC Electronics Limited

Our mission is to develop and manufacture the most comprehensive and innovative audio visual products for our clients. We provide the best performance/price ratio products because it could give you satisfaction just from the time you use them, we believe the good design with cutting edge technology on products will provide value to all our partners and end users. Listen to your demands, we fulfill it.

VISSONIC

4/F, Building 6, No. 50 Nanxiang 1st Road, Huangpu District, Guangzhou, China

• Tel: +86-020-82515140 • E-mail: info@vissonic.com

@2024VISSONIC Electronics Ltd. all rights reserved.