



# PROTEUS ODEON



850W Variable CRI LED IP66 Framing Profile Fixture with CMY

DATA SHEET

## KEY FEATURES

IP66 Outdoor Rated

High Efficiency 850W 6,500K Variable CRI White LED Engine

TruTone remote CRI Adjustment up to CRI 93

Up to 30800 Total Lumen Fixture Output

Flat Field Engine for precise projection at long distances

CMY Color Mixing and Variable CTO

5-Position Color Wheel with UV Filter

Complete FX System featuring Dual Rotating and Fixed Gobo

Wheel, Animation, Iris, Dual Prism, Dual Frost

Indexable Full Blackout Framing System

Wide Zoom Range from 5.5° to 50°

FIL (Foam In Lay) Polyurethane Foam Packaging Included



The **PROTEUS ODEON™** is a powerful yet compact IP66-rated LED profile fixture offering outstanding projection and beam qualities in any environment.

Providing up to 30800 lumens output from its custom-designed Variable CRI LED engine, the **PROTEUS ODEON** is the ideal fixture for any outdoor or indoor application requiring superior output, bright and powerful beams, and quiet operation, as well as stunningly precise gobos and colors.

The TruTone variable CRI allows selecting the best blend of light output and color accuracy, depending on the requirement of the show or scene. It is seamlessly adjustable from CRI 70 to CRI 93.

**PROTEUS ODEON** provides the designer a comprehensive FX package with 13 rotating and 7 fixed glass gobos, full animation wheel, overlapping dual prisms, dual frost and a high-speed iris. Its indexable framing system allows full-blackout shutter cuts for precise beam shape control.

With a fast zoom range from 5.5° to 50° out of an impressively compact fixture design, the **PROTEUS ODEON** has the power to cut through and make a statement on any stage. Fully sealed from dust and water, it is a rugged fixture for a wide variety of applications.

The **PROTEUS ODEON** ships in a cardboard box with a custom-fitted polyurethane foam FIL (Foam In Lay) insert. The foam insert easily fits into a custom flight case (not included) and provides enhanced impact protection during transport.





# PROTEUS ODEON



850W Variable CRI LED IP66 Framing Profile Fixture with CMY

## SPECIFICATIONS

### SOURCE

High Efficiency 850W 6,500K Variable CRI  
White LED Engine  
30,000 Hour Average LED Life

\*Test lab conditions. May vary depending on several factors including but not limited to: Environmental Conditions, Power/Voltage, Usage Patterns (On-Off Cycling), Control, and Dimming.

### PHOTOMETRIC DATA

30,800 Total Lumen Fixture Output  
TruTone variable CRI up to CRI 93  
Zoom Range 5.5° - 50°

### EFFECTS

Motorized Zoom  
4 Rotating Full Blackout Framing Blades  
+/-45° Framing Indexing  
Full 360° Bi-Directional Animation Wheel  
4-Facet and Linear Rotating Prisms  
2 Variable Frost Filters (Light and Wash)  
Internal Color, Framing, Prism, and Frost  
Macros  
Motorized Iris with Variable Pulse Effects  
Variable 16-bit Dimming Curve Modes  
High Speed Electronic Shutter and Strobe  
DMX Controllable LED Refresh Rate  
Pan Angle: 540°/630°  
Tilt Angle: 250°

### COLOR

CMY Color Mixing  
Linear CTO Color Correction  
5 Dichroic Colors including UV Filter

### GOBOS

3 Gobo Wheels  
6 Rotating Gobos (Wheel #1)  
7 Rotating Gobos (Wheel #2)  
7 Static Gobos (Wheel #3)

### CONTROL / CONNECTIONS

4 DMX Channel Modes  
16-bit Pan, Tilt and Dimming Control  
Motorized Focus and Auto-Focus Presets  
DMX, RDM, Art-NET, sACN Protocol Support  
(6) Button Touch Control Panel  
Full Color 180° Reversible LCD Menu Display  
Hibernation Mode (Power Save)  
IP65 Locking 5pin XLR Connector In/Out  
IP65 Locking RJ45 Ethernet Connector In/Out  
IP65 Locking Power Connector In  
With Wired Digital Communication Network

### SIZE / WEIGHT

Length: 18.40 in (468mm)  
Width: 14.57 in (370mm)  
Height: 27.2 in (692mm)  
Weight: 92.6 lbs. (42 kg)

### ELECTRICAL

AC 120-240V 50/60Hz  
Max Power Consumption 1500W  
14°F to 113°F (-10°C to 45°C)  
BTU/hr (+/- 10%) 3239.5

### INCLUDED ITEMS

Omega Brackets (x2)  
IP65 Rated 5pin DMX Cable  
IP65 Rated RJ45 DATA Cable (Fixture to  
Fixture Interconnect Use Only!)  
IP65 Rated Twist-Lock Power Cable

### APPROVALS / RATINGS

CE | cETLus | IP66





# PROTEUS ODEON



850W Variable CRI LED IP66 Framing Profile Fixture with CMY

**GOBOS | COLORS | ANIMATION WHEEL**

### COLOR FLAGS



### COLOR WHEEL




### INTERCHANGEABLE-ROTATING GLASS GOBO WHEEL



### INTERCHANGEABLE STATIC - FIXED GLASS GOBO WHEEL



### ANIMATION WHEEL



## ORDERING INFORMATION

PRO621	1237000273	PROTEUS ODEON
TRIGGER CLAMP	1741000033	Heavy Duty Wrap Around Hook Style Clamp
STR527	N/A	5 ft. (1.5m) IP65 5pin XLR Cable



Specifications are subject to change without notice ©Elation Professional 02/26/2024  
Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu




# PROTEUS ODEON



850W Variable CRI LED IP66 Framing Profile Fixture with CMY

## UNIT DIMENSIONS

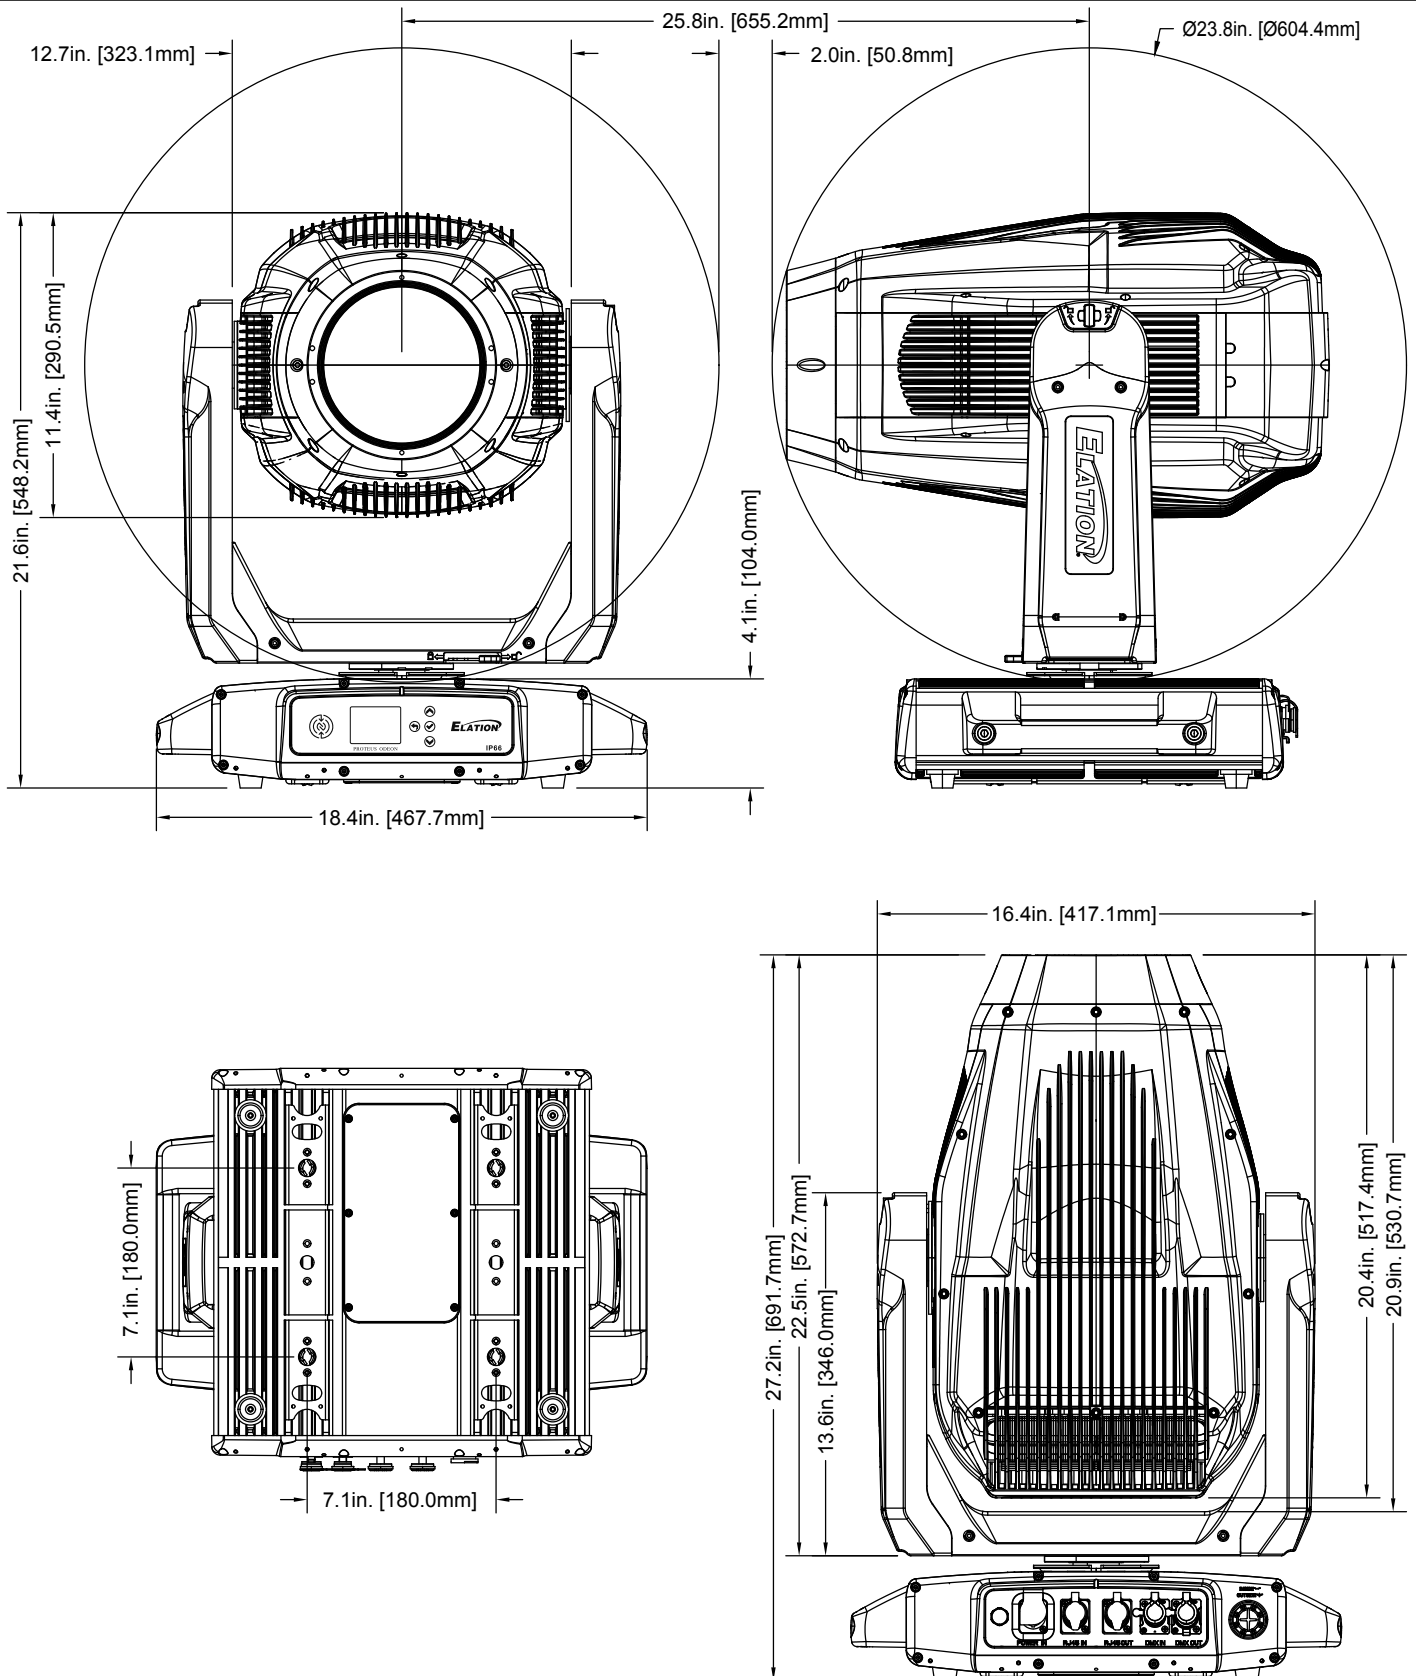

Specifications are subject to change without notice ©Elation Professional 02/26/2024  
Elation Professional USA | 6122 S. Eastern Ave. | Los Angeles, CA. 90040  
323-582-3322 | 323-832-9142 fax | www.elationlighting.com | info@elationlighting.com

Elation Professional B.V. | Junostraat 2 | 6468 EW Kerkrade, The Netherlands  
+31 45 546 85 66 | +31 45 546 85 96 fax | www.elationlighting.eu | info@elationlighting.eu



# PROTEUS ODEON



850W Variable CRI LED IP66 Framing Profile Fixture with CMY

## FOAM IN-LAY DIMENSIONS

