

SPECIFICATION SHEET



Locking C19 to C20 Power Cords

- Locking C19 connector ensures port retention to critical equipment
- Constructed of heavy duty 15AWG conductors
- Rated up to 150V 15A
- CE rated, UL listed, TAA compliant
- Lifetime Warranty




Specifications: Locking C19 to C20 Power Cords

Electrical Specifications:

Voltage Rating:	300V
Amp Rating:	15A
Conductor:	33/0.254mm ± 0.002mm

Physical Specifications:

Overall Diameter:	8.8mm ±0.2mm
Average Insulation Thickness:	0.76mm
Operating Temperature:	-10~70°C; 50±20%RH
Storage Temperature:	-20~50°C; 50±20%RH
Certifications:	(UL) SJT E90165, ROHS, CE

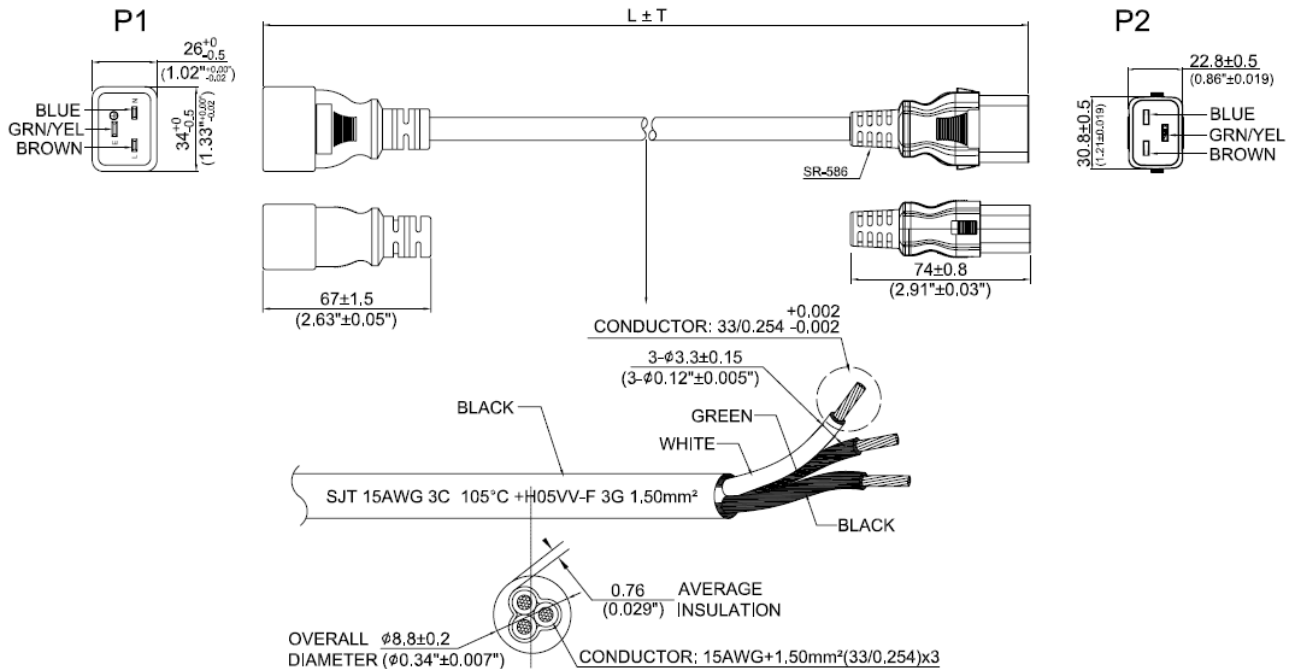

Part Number	Description	Weight (lbs)
80706	1ft (.3m) Locking C19 to C20 15A 250V Power Cord	.255
80707	2ft (.6m) Locking C19 to C20 15A 250V Power Cord	.291
80708	3ft (.9m) Locking C19 to C20 15A 250V Power Cord	.330
80709	6ft (1.8m) Locking C19 to C20 15A 250V Power Cord	.727
80710	10ft (3m) Locking C19 to C20 15A 250V Power Cord	1.146
80711	15ft (4.5m) Locking C19 to C20 15A 250V Power Cord	1.874



Great King Street North
 Birmingham, West Midlands B19 2LF
 UK Phone (0)800 328 2916
 EMEA Phone +44 (0)1952 677300
www.c2g.com

Follow Us

