


# 1.8M/3M/6M/10M/20M/40M VGA Cable

## 2L-2401/2L-2403/2L-2406/2L-2410/2L-2420/2L-2440

- The VGA Cable is designed to provide a high quality VGA connection, ideally suited for high resolution applications up to 1920 x 1200. This durably constructed VGA video cable eliminates the picture ghosting and fuzzy images, guaranteeing users the ultimate AV experiences.

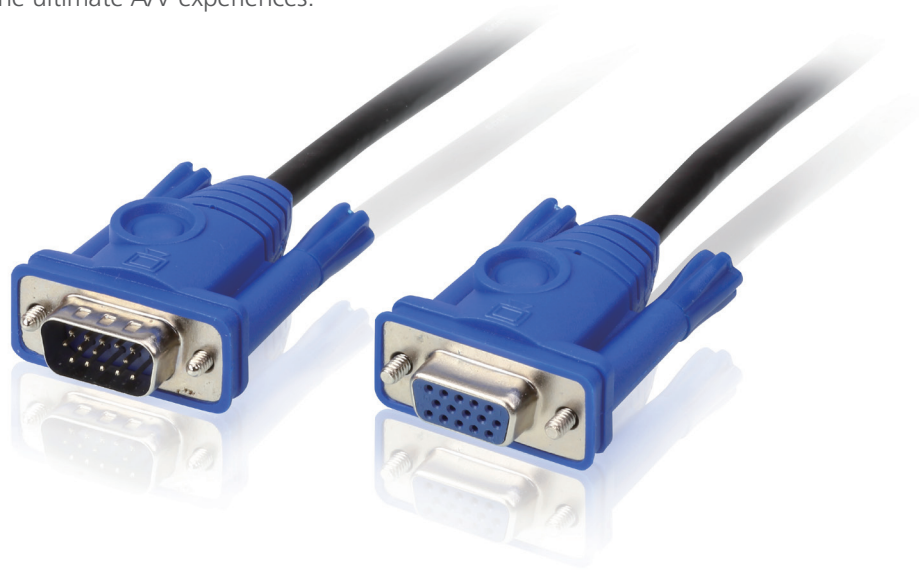

## Features

- Optimized for analog signal transmission
- VGA cable with 15-pin female input and male output
- Bend Radius: 90°\*
- Outer shielded material: Al Mylar tape
- A range of cable lengths, available from 1.8 to 40 m
- RoHS compliant
- Compatible with ATEN VGA products

**Note:**\* Swings 1000 times between angles of +/- 90 degrees, at a frequency of 30 times per minute

## Specifications

Function	2L-2401	2L-2403	2L-2406	2L-2410	2L-2420	2L-2440
<b>Conductor</b>						
Material	Tinned Copper					
Conductor Diameter	30 AWG					
<b>Jacketed</b>						
Material	Jacket: PVC Shielding: AL-Mylar					
<b>Connectors</b>						
Video	HDB-15 Male HDB-15 Female					
<b>Cable Length</b>	1.8 m	3 m	6 m	10 m	20 m	40 m

Product information is subject to change without prior notice.

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Publish Date: 03/2018 V1.0



© Copyright 2018 ATEN® International Co., Ltd.  
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.