PIXEL DRIVER 170IP





DATA SHEET



KEY FEATURES

The Pixel Driver 170IP™ is a professional DMX512, 12-24VDC LED tape driver that supports up to one full universe of DMX (170 pixels). Its small compact design allows for easy mounting and integration into any system. It features a 3-button LED control display, DMX IN and OUT 5-pin XLR connections, a 4pin XLR connector for LED tape output, and a 2pin connector for 12-24VDC power IN.

The **Pixel Driver 170IP™** is a professional, IP65, tape driver specifically designed for the Elation
Pixel Tape 16IP and Pixel Tape 40IP. This driver provides simple and easy control options including a
3-button OLED Display, EL IR Remote (included), and one full universe of DMX control (170 pixels).
The **Pixel Driver 170IP** features an easy-to-use OLED display, Pixel grouping, DMX IN and OUT, a 4pin
XLR connector for LED tape output, and a 2pin connector for 12-24VDC power IN.

PIXEL DRIVER 170IP





SPECIFICATIONS

CONTROL / CONNECTIONS

3-Button OLED Display
1 DMX Universe (170 Pixels)
LED Control: APA102
EL IR Remote (Included)
DMX Input via 5pin XLR Connector
DMX Output via 5pin XLR Connector
LED Tape Out via 4pin XLR Connector

SIZE / WEIGHT

Length: 3.68" (93.5mm) Width: 7.38" (187.5mm)

Height: 3" (75.7mm) (*4.37" (111mm) with

Omega Bracket)

Weight: 1.77lbs. (0.8kgs.)

ELECTRICAL

DC Input 12-24VDC, 2A (Requires separate power supply)
48W Max Power Consumption

INCLUDED ACCESSORIES:

EL-IR Remote IR Receiver Cable 2-pin Power Cable to adapt to PSU

OPTIONAL ACCESSORY:

Pixel Driver 170 PSU (PIX659)

APPROVALS / RATING

CE | RoHs | UKCA (Pending) | cETL (PENDING) IP65






PIXEL DRIVER 170IP





UNIT DIMENSIONS

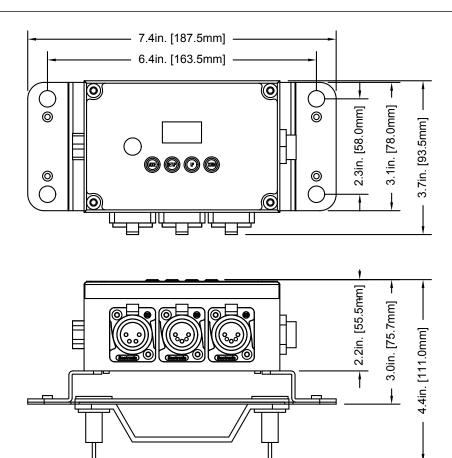

ORDERING INFORMATION

PIX633	PIXEL DRIVER 170IP
PIX618	PIXEL TAPE 16IP
PIX600	PIXEL TAPE 40IP
PIX300	PIXEL BC2
PIX313	PIXEL BC3
PIX36	PIXEL BC5
PIX339	PIXEL BC10
	Additional cable lengths available



